

# Tortuca

## An Ultra-Thin Funicular Hollow Glass Bridge

Yao Lu, Alireza Seyedahmadian, Philipp Amir Chhadeh, Matthew Cregan, Mohammad Bolhassani, Jens Schneider, Joseph Robert Yost, Gareth Brennan, Masoud Akbarzadeh

Designed with Polyhedral Graphic Statics (PGS), a geometry-based structural form-finding method, Tortuca presents an efficient and innovative structural system constructed by the dry assembly of thirteen hollow glass units (HGU). It also proposes a new language for glass that is carefully treated, structurally informed, fabrication-aware, and environmentally responsible. Each HGU of *Tortuca* is made of 1 cm (3/8 inch) glass deck plates and 2 cm (0.7 inch) acrylic side plates precisely cut with 5-axis abrasive waterjet cutting and CNC milling to match the structural geometry. The structure spans 3.2 m (10.5 ft) with a mass of only 250 kg (550 lbs), where the float glass is the primary load-bearing material. Thanks to the efficiency and light weight of the construction system, a single person can assemble and disassemble the structure without needing a crane or additional labor. Moreover, this research explores the potential of using an extremely delicate material such as float glass for the primary structural system to encourage minimizing the material and energy demands in buildings and infrastructural projects. Additionally, it shows how utilizing the material in its purest format could simplify the recycling process after the life cycle of the structure has ended. Also, this research project is achieved by collaboration across different institutions, from design to engineering, from theoretical to practical, and from academia to industry. We appreciate the value of breaking disciplinary boundaries and joining forces from multiple fields.

### STRUCTURAL FORM-FINDING

The generation of the base geometry (Figure 3) is achieved through PolyFrame (Nejur and Akbarzadeh 2021), a Rhino plug-in that implements PGS. The generated form diagram with thirteen polyhedral cells is then optimized regarding global dimensions, individual edge lengths, and face angles, to better satisfy the fabrication constraints and increase the ease of the subsequent fabrication process. As a result, the bridge dimension is set to 3.2 m(L) × 1.3 m(W) × 0.55 m(H), the thicknesses of the polyhedral cells are set to around 100 mm, and each cell is constrained to a size that one person can handle during the construction process.

### MATERIALIZATION

After obtaining the base geometry of the bridge, each polyhedral cell is materialized as one HGU. The HGU details and

### PRODUCTION NOTES

Architect:	Yao Lu, Masoud Akbarzadeh
Status:	Completed
Site Area:	50 sq. ft.
Date:	2022

1 Side view of the assembled hollow glass bridge structure









2 The assembled hollow glass bridge structure

the steel abutments that hold all HGUs are devised based on the material selection and fabrication constraints. Each of the two top and bottom faces of every polyhedral cell is materialized as a glass deck plate using 9.5 mm annealed glass. For the smaller side faces, they are materialized as either 9.5 mm thick glass side plates or 21 mm thick acrylic side plates, depending on whether they need to accommodate the connection mechanisms with the neighbor HGUs (Figure 4). Improved from a precedent (Lu et al. 2021), the connection mechanism between neighboring HGUs contains two pocket channels on the pair of facing side plates and a locking strip that has a butterfly shape section profile. Between the neighboring HGU deck plates and between the HGUs and steel abutments, Surlyn sheets cut with a 3-axis CNC router are placed and used as the interface material preventing direct glass-to-glass, and glass-to-steel contact.

## NUMERICAL SIMULATION

Before HGU fabrication and bridge assembly, a static numerical finite element analysis is conducted using ANSYS, which follows the previously established analysis sequence as explained by Yost et al. (2022). The result shows that the bridge successfully sustains its self-weight.

## FABRICATION AND ASSEMBLY

The glass parts are cut using 5-axis abrasive waterjet cutter (Figure 5), and the acrylic parts are milled using 5-axis CNC router (Figure 6). The assembly process consists first of the construction of the individual HGUs (Figure 7) followed by


the assembly of the entire bridge (Figure 9). The heaviest HGU of the bridge weighs about 23.3 kg, meaning that the assembly process can be handled by one person without any heavy construction machinery. Moreover, most material can be easily dismantled and recycled at the end of its life cycle as a consequence of the dry assembly process.

## ACKNOWLEDGMENTS

This project was supported by University of Pennsylvania Research Foundation Grant (URF), National Science Foundation CAREER AWARD (NSF CAREER-1944691-CMMI), and the National Science Foundation Future Eco Manufacturing Research Grant (NSF, FMRG-CMMI 2037097) to Dr. Masoud Akbarzadeh. It was also supported by Villanova University Summer Grant Program (USG) to Dr. Joseph Yost. The multi-axis milling, metalwork, and other facilities were supported by Eventscape NY.

## REFERENCES

Lu, Y., A. Seyedahmadian, P.A. Chhadeh, M. Cregan, M. Bolhassani, J. Schneider, J.R. Yost, G. Brennan, and M. Akbarzadeh. 2022. "Funicular

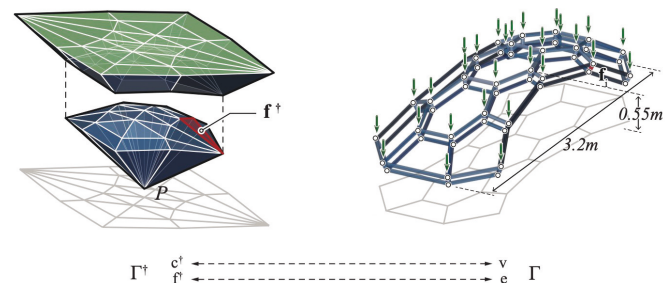

3 Form-finding using Polyhedral Graphic Statics (PGS)





4 Close-up of the butterfly connection mechanism




5 5-axis abrasive waterjet cutting for glass fabrication




6 5-axis CNC milling for acrylic fabrication




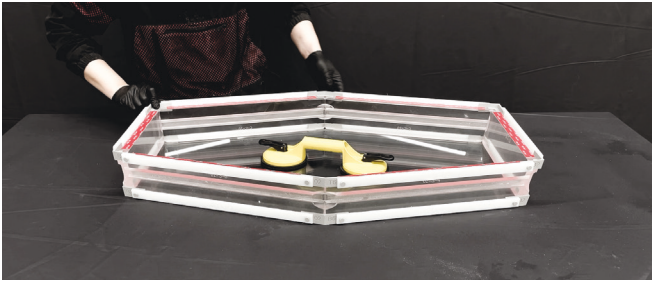

7 Construction of a typical hollow glass unit

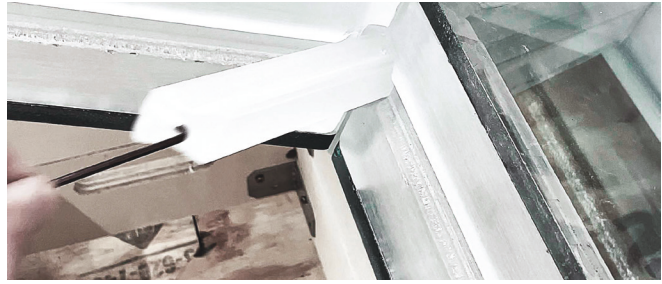

8 The locking strips can be easily inserted and removed during assembly

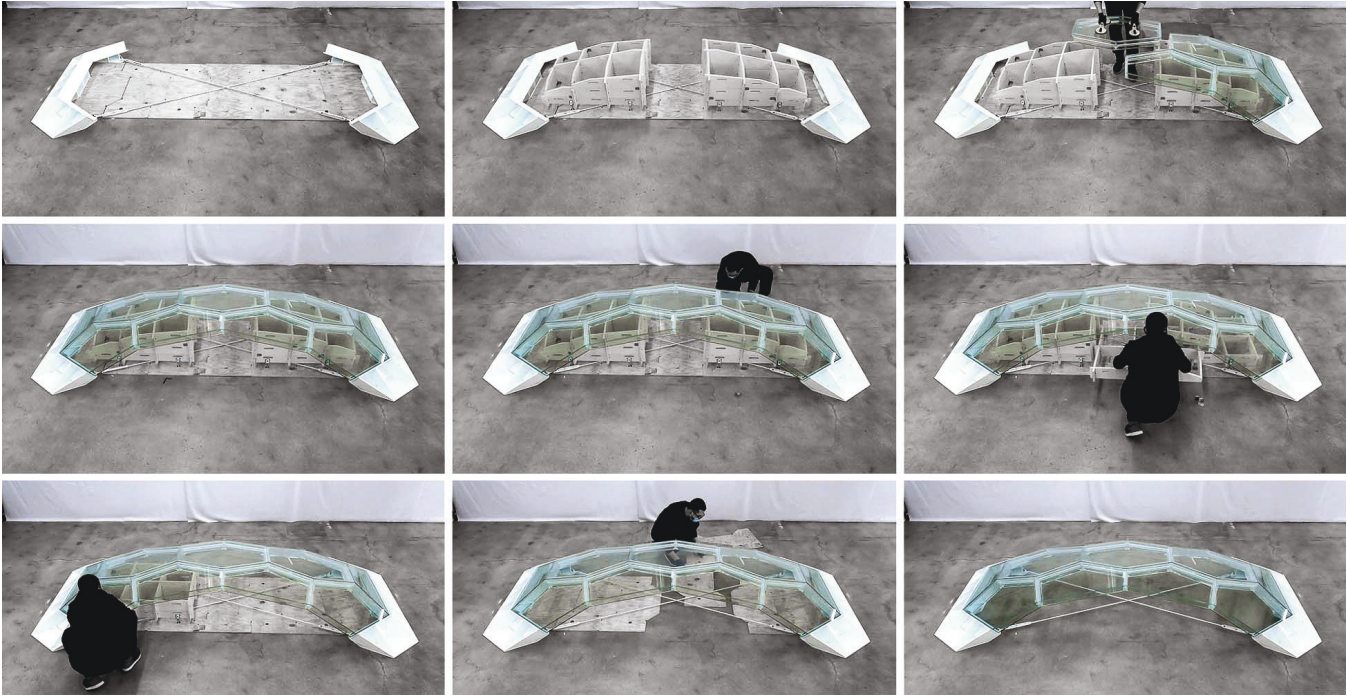

9 The modular assembly process of the structure can be handled by one person thanks to the lightweight of the hollow glass units

Glass Bridge Prototype: Design Optimization, Fabrication, and Assembly Challenges." *Glass Structures & Engineering* 7 (2): 319–330.

Lu, Y., M. Cregan, P.A. Chhadeh, A. Seyedahmadian, M. Bolhassani, J. Schneider, J. Yost, and M. Akbarzadeh. 2021. "All Glass, Compression-Dominant Polyhedral Bridge Prototype: Form-Finding and Fabrication." In *Inspiring the Next Generation: Proceedings of the 7th International Conference on Spatial Structures and the Annual Symposium of the IASS*. Surrey, UK. 326–36.

Nejur, A., and M. Akbarzadeh. 2021. "PolyFrame, Efficient Computation for 3D Graphic Statics." *Computer-Aided Design* 134 (May): 103003.

Yost, J.R., M. Bolhassani, P.A. Chhadeh, L. Ryan, J. Schneider, and M. Akbarzadeh. 2022. "Mechanical Performance of Polyhedral Hollow Glass Units under Compression." *Engineering Structures* 254 (March): 113730.

## IMAGE CREDITS


All other drawings and images by the authors.

**Yao Lu** is a PhD student of Architecture at the Polyhedral Structures Laboratory (PSL), University of Pennsylvania. He is a design researcher with interests in generative design, computational techniques, and digital fabrication. He holds a Master of Science in Matter Design Computation degree from Cornell University, and a Master's in Architecture and a Bachelor's in Engineering from Tongji University.

**Alireza Seyedahmadian** is a Senior Design Engineer at Eventscape, where he leads the Advanced Manufacturing Department in their Long Island City facility. Ali is an artist, designer, and maker with a background in Architecture and Digital + Robotic Fabrication. He holds a Master's in Architecture from the University of Michigan and has worked primarily in leading custom fabrication companies for the world of art and architecture.

**Philipp Amir Chhadeh** is a PhD student at the Institute of Structural Mechanics and Design, Technische Universität Darmstadt. He also works as a Research Assistant at Glass Competence Center and Generative Design Lab.




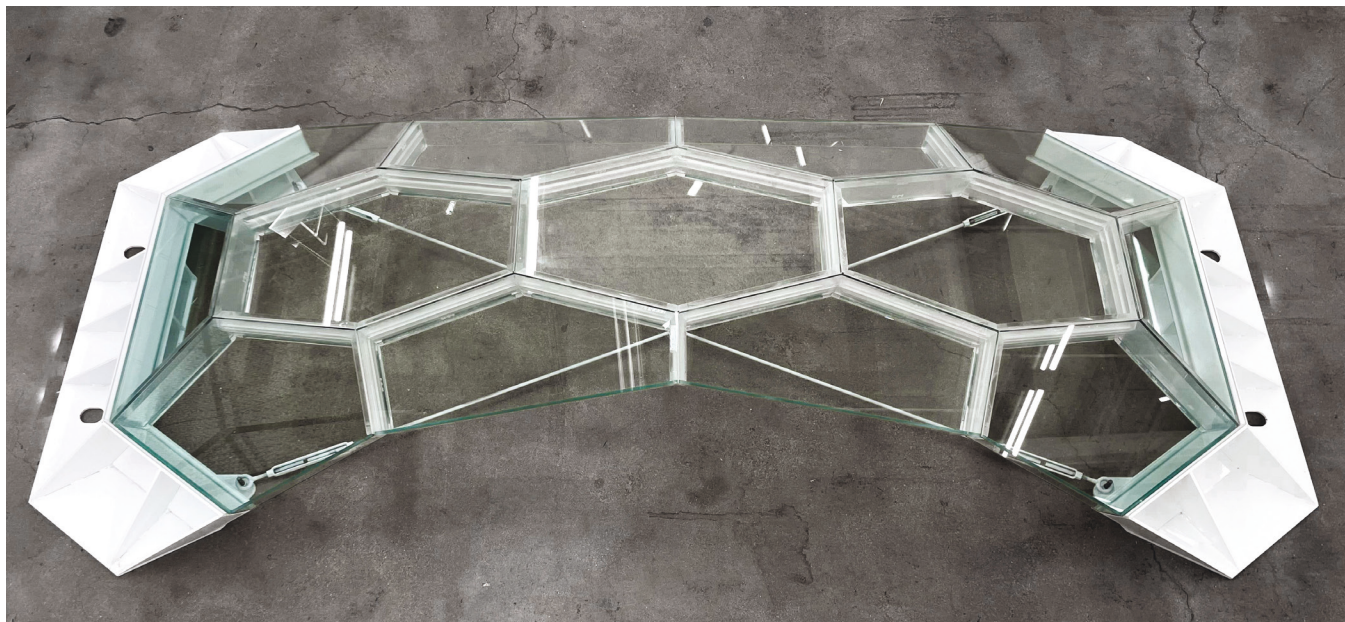

10 Aerial view showing both the compression and tension members



11 View looking up at the steel abutment

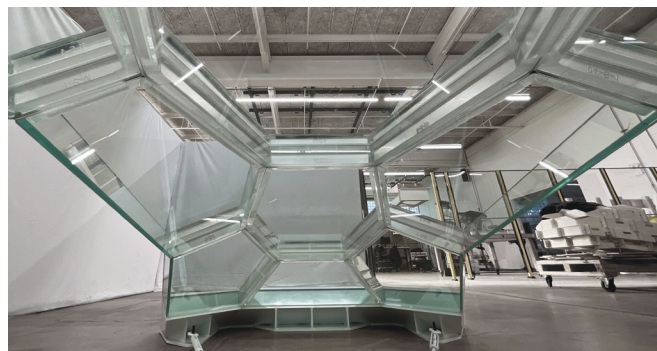

12 View from under the glass bridge structure

**Matthew Cregan** received a Master of Science in Civil Engineering with a structural concentration from Villanova University in 2022. He is currently employed as a bridge engineer with Hardetsy & Hanover in New York City.

**Mohammad Bolhassani** is Assistant Professor at the Bernard & Anne Spitzer School of Architecture, the City College of New York. His experience covers computational and experimental analysis, design, retrofit, and rehabilitation of structures.

**Jens Schneider** is Professor at the Institute of Structural Mechanics and Design, Technische Universität Darmstadt. His research interests include analysis of complex structural systems and innovative materials in construction engineering.

**Joseph Robert Yost** is Professor in the Department of Civil and Environmental Engineering at Villanova University. His research interests include investigation of novel materials and innovative structural systems for application in civil infrastructure.

**Gareth Brennan** is the President and Founder of Eventscape, an elite art and architectural fabrication company. Founded in 1993, Eventscape is an internationally recognized, award-winning company with 150,000 sq. ft. of state-of-the-art manufacturing facilities in Toronto and a 20,000-sq. ft. state-of-the-art studio in Long Island City, supported by a talented team of two hundred architects, designers, engineers, and craftsmen. The company's projects have won over 150 major design industry awards to date. In 2009, Gareth was named Canadian CEO of the Year for best design strategy at the annual Design Exchange Awards.

**Masoud Akbarzadeh** is Assistant Professor of Architecture in Structures and Advanced Technologies and the Director of the Polyhedral Structures Laboratory (PSL) at University of Pennsylvania. His main research topic is Three-Dimensional Graphic Statics, a novel geometric method of structural design in three dimensions. In 2020, he received National Science Foundation CAREER Award to extend the methods of 3D/Polyhedral Graphic Statics for Education, Design, and Optimization of High-Performance Structures.