



Characterization of Freestream Disturbances in Conventional Hypersonic Wind Tunnels

Lian Duan*

Missouri University of Science and Technology, Rolla, Missouri 65409

Meelan M. Choudhari[†] and Amanda Chou[‡]

NASA Langley Research Center, Hampton, Virginia 23681

Federico Munoz[§] and Rolf Radespiel[¶]

Braunschweig University of Technology, Braunschweig 38108, Germany

Thomas Schilden^{**} and Wolfgang Schröder^{††}

RWTH Aachen University, 52062 Aachen, Germany

Eric C. Marineau^{‡‡}

AEDC White Oak, Silver Spring, Maryland 20903

Katya M. Casper^{§§}

Sandia National Laboratories, Albuquerque, New Mexico 87185

Ross S. Chaudhry^{¶¶} and Graham V. Candler^{***}

University of Minnesota, Minneapolis, Minnesota 55455

and

Kathryn A. Gray^{†††} and Steven P. Schneider^{†††}

Purdue University, West Lafayette, Indiana 47907

DOI: 10.2514/1.A34290

Although low-disturbance (“quiet”) hypersonic wind tunnels are believed to provide more reliable extrapolation of boundary-layer transition behavior from ground to flight, the presently available quiet facilities are limited to Mach 6, moderate Reynolds numbers, low freestream enthalpy, and subscale models. As a result, only conventional (“noisy”) wind tunnels can reproduce both Reynolds numbers and enthalpies of hypersonic flight configurations and must therefore be used for flight vehicle test and evaluation involving high Mach number, high enthalpy, and larger models. This paper outlines the recent progress and achievements in the characterization of tunnel noise that have resulted from the coordinated effort within the AVT-240 specialists group on hypersonic boundary-layer transition prediction. The new experimental measurements cover a range of conventional wind tunnels with different sizes and Mach numbers from 6 to 14 and extend the database of freestream fluctuations within the spectral range of boundary-layer instability waves over commonly tested models. New direct numerical simulation datasets elucidate the physics of noise generation inside the turbulent nozzle wall boundary layer, characterize the spatiotemporal structure of the freestream noise, and account for the propagation and transfer of the freestream disturbances to a Pitot-mounted sensor.

Nomenclature

a	=	speed of sound, m/s
C_p	=	heat capacity at constant pressure, J/(K · kg)
E	=	hot-wire voltage, J/C
f	=	frequency, Hz
H	=	hot-wire variables
k	=	transfer function
M	=	Mach number; u/a
M_r	=	relative Mach number; $(U_\infty - U_b)/a_\infty$
$\dot{m}$	=	mass flow rate; ρu , kg/(m ² · s)
P	=	total pressure, Pa
p	=	pressure, Pa
Re_τ	=	friction Reynolds number; $\rho_w u_\tau \delta / \mu_w$
R	=	wind-tunnel nozzle radius, m
r	=	radial coordinate, m
S	=	ratio of transfer functions with two pitot-probe geometries
s	=	entropy, J/K
T	=	temperature, K
T_r	=	recovery temperature, K
T_0	=	total temperature, K
U_∞	=	freestream velocity, m/s
U_b	=	bulk propagation speed of freestream acoustic disturbances, m/s
u_τ	=	friction velocity, m/s
x	=	streamwise direction of the right-hand Cartesian coordinate, m

Presented as Paper 2018-0347 at the 2018 AIAA Aerospace Sciences Meeting, Kissimmee, FL, 8–12 January 2018; received 21 May 2018; revision received 20 August 2018; accepted for publication 21 August 2018; published online Open Access 29 November 2018. Copyright © 2018 by Lian Duan and United States Government. Published by the American Institute of Aeronautics and Astronautics, Inc., with permission. All requests for copying and permission to reprint should be submitted to CCC at www.copyright.com; employ the ISSN 0022-4650 (print) or 1533-6794 (online) to initiate your request. See also AIAA Rights and Permissions www.aiaa.org/randp.

*Assistant Professor, Department of Mechanical and Aerospace Engineering. Senior Member AIAA.

[†]Senior Research Scientist, Computational Aerosciences Branch. Associate Fellow AIAA.

[‡]Research Aerospace Engineer, Flow Physics and Control Branch. Senior Member AIAA.

[§]Research Assistant, Institute of Fluid Mechanics, Hermann-Blenk-Str. 37.

[¶]Head, Institute of Fluid Mechanics, Hermann-Blenk-Str. 37. Associate Fellow AIAA.

^{**}Research Scientist, Institute of Aerodynamics, Wüllnerstr. 5a.

^{††}Head, Institute of Aerodynamics, Wüllnerstr. 5a.

^{‡‡}Chief Technologist; currently Program Manager, Hypersonic Aerodynamics, Code 35, Office of Naval Research, Arlington, VA 22203. Senior Member AIAA.

^{§§}Principal Member of the Technical Staff. Senior Member AIAA.

^{¶¶}Graduate Student, Department of Aerospace Engineering and Mechanics. Student Member AIAA.

^{***}McKnight Presidential Professor and Russell J. Penrose Professor, Department of Aerospace Engineering and Mechanics. Fellow AIAA.

^{†††}Graduate Student, School of Aeronautics and Astronautics. Student Member AIAA.

^{†††}Professor, School of Aeronautics and Astronautics. Fellow AIAA.

x_t	=	axial distance from throat, m
y	=	spanwise direction of the right-hand Cartesian coordinate, m
z	=	wall-normal direction of the right-hand Cartesian coordinate, m
z_n	=	normal distance from the wall, m
α	=	frequency-specific wave number in the streamwise direction in Eq. (1), $\omega \cos \theta / (\bar{u} \cos \theta + \bar{c})$, m^{-1}
β	=	frequency-specific wave number in the vertical direction in Eq. (1), $\omega \sin \theta / (\bar{u} \cos \theta + \bar{c})$, m^{-1}
γ	=	specific heat ratio
δ	=	boundary-layer thickness, m
δ^*	=	displacement thickness, m
ζ	=	coefficient in hot-wire modal analysis
θ	=	coefficient in hot-wire modal analysis
μ	=	dynamic viscosity, $\text{kg}/(\text{m} \cdot \text{s})$
ρ	=	density, kg/m^3
ϕ	=	randomly-selected phase in Eq. (1)
ω	=	angular frequency, rad/s
—	=	averaged or mean variables

Subscripts

ac	=	acoustic
en	=	entropy
k	=	frequency-specific values
rms	=	root mean square
t	=	transducer-measured quantities in Eq. (3)
vo	=	vortical
w	=	wall variables
∞	=	freestream variables
0	=	stagnation quantities
1	=	pres shock quantities of a pitot probe
2	=	post shock quantities of a pitot probe

Superscripts

+	=	inner wall units
'	=	perturbation from averaged variables

I. Introduction

PREDICTION of boundary-layer transition is a critical part of the design of hypersonic vehicles because of the large increase in skin-friction drag and surface heating associated with the onset of transition. Testing in conventional (noisy) wind tunnels has been an important means of characterizing and understanding the boundary-layer transition behavior of hypersonic vehicles. Because the existing low-disturbance (i.e., quiet) facilities operate only at Mach 6, moderate Reynolds numbers, fairly small sizes, and low freestream enthalpy, conventional facilities will continue to be employed for testing and evaluation of hypersonic vehicles, especially for ground testing

involving other Mach numbers, higher freestream enthalpies, and larger models. To enable better use of transition data from conventional facilities and more accurate extrapolation of wind-tunnel results to flight, one needs an in-depth knowledge of the broadband disturbance environment in those facilities as well as of the interaction between the freestream disturbances with laminar boundary layers.

Freestream disturbances in conventional high-speed wind tunnels are usually composed of acoustic disturbances, vorticity disturbances, and fluctuations of flow entropy. The acoustic disturbances are mainly generated within the high-speed, turbulent boundary layers along the nozzle walls and radiated into the wind-tunnel test section [1]. The intensity of the acoustic disturbances increases rapidly with flow Mach number, and hence these disturbances are likely to dominate the overall disturbance environment at Mach numbers of 2.5 or above [2–5] and can strongly affect the transition processes. Theoretical models for acoustic radiation from a supersonic boundary layer were developed by Phillips [6] and Ffowcs-Williams and Maidanik [7], who attributed a major cause of the acoustic radiation to eddy Mach waves from boundary-layer turbulence convecting supersonically with respect to the freestream. A lack of adequate knowledge concerning the boundary-layer turbulence restricted the theoretical predictions to just the intensity of the freestream acoustic fluctuations. Fluctuations of freestream vorticity and entropy stem from the flow state in the tunnel settling chamber and the subsequent changes imposed by the wind-tunnel nozzle. Figure 1 [8] gives a schematic of the origin of freestream disturbances in a supersonic/hypersonic wind tunnel.

The freestream disturbances in conventional tunnels can impact not only the transition location but possibly the transition mechanism as well, and their effect on transition cannot be quantified in terms of a single metric corresponding to the rms amplitude, as indicated by the measurements at Purdue University [9] and Arnold Engineering Development Complex (AEDC) Tunnel 9 [10]. Unfortunately, existing measurements mostly provide data in terms of rms values alone (i.e., without an evaluation of the disturbance spectra up to the high frequencies observed in transitional hypersonic boundary layers). Although a number of investigators have reported measurements of freestream disturbance intensity in high-speed facilities at both supersonic and hypersonic Mach numbers (see for example [11–15]), these measurements are largely limited to single-point information (e.g., freestream pitot pressure fluctuations), and the measurements by Laufer [3,16] still reflect one of the few datasets that are detailed enough to be suitable for comparison or model development.

Recently, new probes and new instrumentation have become available to the research community that greatly help the physical characterization of freestream disturbance levels [17,18]. The new experimental data are able to cover a spectral range of disturbances that were previously not achieved by using hot-wire probes. Progress in direct numerical simulation (DNS) as well as the rapid deployment of high-performance computing facilities across the United States and around the world provide the opportunity to address the problem

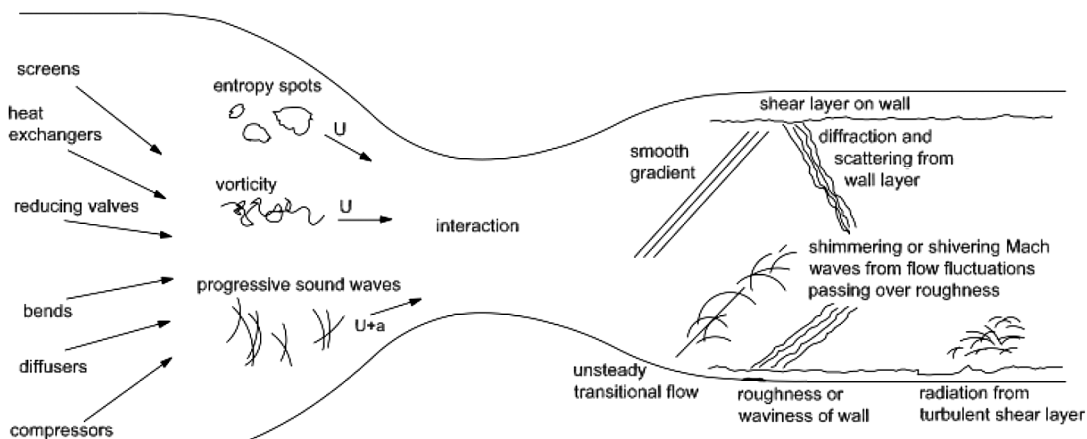


Fig. 1 Schematic of freestream disturbances in supersonic/hypersonic wind tunnels (adapted from Schneider [8]).

of the generation of acoustic disturbances at the nozzle walls and the transfer of those disturbances to the location of a pitot-mounted sensor, making the numerical rebuilding of transition experiments possible. The progress in both experimental and numerical techniques holds the potential to bridge the gap between quiet tunnels, conventional wind tunnels, and flight.

The current paper summarizes the coordinated experimental and numerical work undertaken by the NATO STO AVT-240 specialists group to characterize the freestream disturbances in conventional hypersonic ground facilities. Definitive progress has been made possible by coordinating international research efforts in this difficult but important area. Specifically, tunnel noise has now been measured with freestream pitot probes mounted with new, fast PCB132 pressure transducers that allow single-point noise characterization up to and above the second-mode frequencies in most tunnels. DNS of acoustic radiation from the nozzle wall have been conducted to provide additional multipoint information of the acoustic disturbance field that would help guide the application of receptivity theories based on more realistic input concerning the disturbance environment. The computed freestream acoustic disturbance field including the acoustic angle has also been used to define inflow conditions for computations of hypersonic flow around a pitot probe, which yield a transfer function that relates the transducer-measured (postshock) spectrum to the (preshock) freestream disturbance spectrum. Such a transfer function can be used to directly correct for the effect of pitot-probe geometry on the measurement. The additional multisensor measurements with both pitot and hot-wire probes can provide further details related to the modal content of freestream disturbances in a facility. All in all, the coordinated experimental and numerical work can be integrated to provide as much information as possible on tunnel noise, with the purpose of developing a “tunnel-like” disturbance field for input into transition computations. Although much work remains to be done to achieve that goal, such international research efforts will eventually enable improved ground-to-flight scalability of the laminar–turbulent transition data from conventional high-speed wind-tunnel facilities.

The paper is structured as follows. Measurements of freestream disturbances in various high-speed facilities with new probes and new instrumentation as well as closely related DNS are outlined in Sec. II. Section III presents DNS studies for synthesizing the naturally occurring, random acoustic disturbances induced by tunnel wall turbulence. Section IV is focused on numerical rebuilding of tunnel freestream disturbances from the measurement of intrusive probes. Section V outlines a summary of the overall findings and a general vision for future research.

II. Tunnel Freestream Disturbance Measurement

Measurements of freestream disturbances in multiple high-speed facilities at hypersonic Mach numbers have been reported with new probes and new instrumentation. Tunnel noise has now been measured with new, fast PCB132 pressure sensors that allow noise characterization up to 1 MHz, which is above the second-mode frequencies in most tunnels. Enabled by the coordinated international research effort, a comparison of tunnel noise measurements in different hypersonic wind tunnels is made that allows for cross-validation and, more importantly, sheds light on whether tunnel-to-tunnel noise variation follows a relatively simple pattern as suggested by Pate’s correlation [19,20].

Figure 2 shows the power spectral density (PSD) of freestream pitot-pressure fluctuations measured in multiple high-speed facilities. The measurement data covers a wide range of tunnel conditions, including the Hypersonic Ludwig Tube Braunschweig (HLB), the Purdue Boeing/U.S. Air Force Office of Scientific Research Mach-6 Quiet Tunnel (BAM6QT), the NASA 20-Inch Mach 6, the Sandia Hypersonic Wind Tunnel at Mach 8 (HWT-8), and the AEDC Tunnel 9; these wind tunnels generate freestream Mach numbers ranging from Mach 6 to 14. The PSDs are computed with pressure signals measured by Kulite sensors in the low-frequency range up to $f \approx 20$ kHz and by PCB PIEZOTRONICS, Inc. sensors in the high-frequency range up to $f \approx 1$ MHz. The

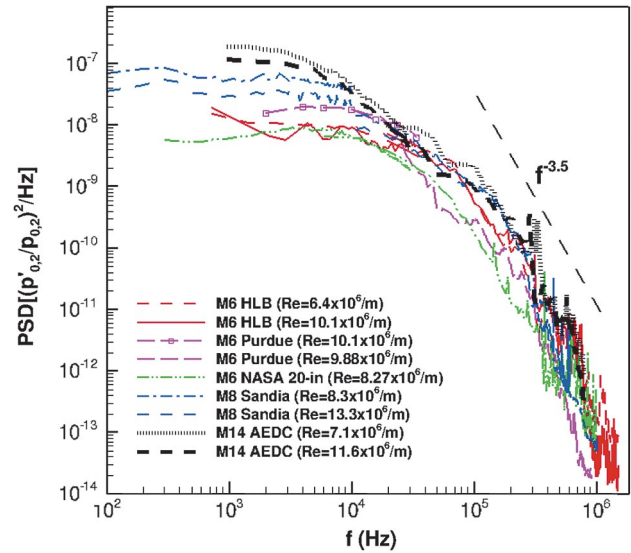


Fig. 2 Power spectral density of freestream pitot-pressure fluctuations measured in multiple high-speed facilities.

frequency range measured by the PCB sensors covers that of second-mode waves. The pressure transducer models and the freestream locations for each measurement point are listed as follows: HLB Mach 6 (Kulite and PCB: $x_t = 2.69$ m, $r = 0.1$ m); Purdue BAM6QT noisy (Kulite: $x_t = 2.3368$ m, $r = 0$ m and PCB: $x_t = 2.2098$ m, $r = 0$ m); NASA 20-Inch Mach 6 (Kulite and PCB: $x_t = 2.25$ m, $r = 0.09042$ m); Sandia HWT-8 (Kulite and PCB: $x_t = 2.3368$ m, $r = 0$ m); AEDC Tunnel 9 Mach 14 (Kulite and PCB: $x_t = 13.97$ m, $r = 0.38$ m). For all the cases, the freestream pitot-pressure spectrum has a similar rate of spectral rolloff at high frequencies. A spectral slope of $f^{-3.5}$ provides a good fit to the data over the second-mode frequency range. The data suggest that the freestream disturbance spectrum relevant to second-mode-dominated boundary-layer transition may be modeled with a constant-slope model of $\Phi \sim f^{-m}$. Such a model has been used by Marineau [21], who proposed a new amplitude method for predicting second-mode-dominated boundary-layer transition in hypersonic wind tunnels. Marineau’s amplitude method was found to reduce the error between the measured and predicted start of transition, compared with predictions based on a constant transition N factor [21]. Because of measurement difficulties at high frequencies and the nontrivial transfer function associated with measurement probes, physics-based transition models of this type cannot rely solely upon the measurement database and synergistic numerical simulations are also important in developing more accurate and reliable models for the tunnel disturbance environment. Direct computations of acoustic freestream disturbances are discussed in Sec. III, whereas the recovery of actual freestream disturbances from probe measurements is addressed in Sec. IV.

III. Direct Simulation of Tunnel Acoustic Disturbances

An important component of the recent progress in tunnel-noise characterization is to use DNS for synthesizing the naturally occurring, random acoustic disturbances created within the tunnel wall turbulence. Given that, in unheated conventional hypersonic tunnels with adequate flow conditioning, the freestream disturbance environment is dominated by acoustic radiation from tunnel-wall turbulent boundary layers (TBLs) [2–5] (Fig. 3 [22]), DNS can be used to resolve both the tunnel-wall boundary layer and the near field of acoustic fluctuations radiated by the boundary layer, thus allowing access to tunnel-noise quantities that are difficult to obtain otherwise and for clarifying the physics of noise generation in conventional hypersonic facilities.

The research teams of Missouri University of Science and Technology and NASA Langley developed a systematic strategy that first established the feasibility of DNS in the context of a canonical,

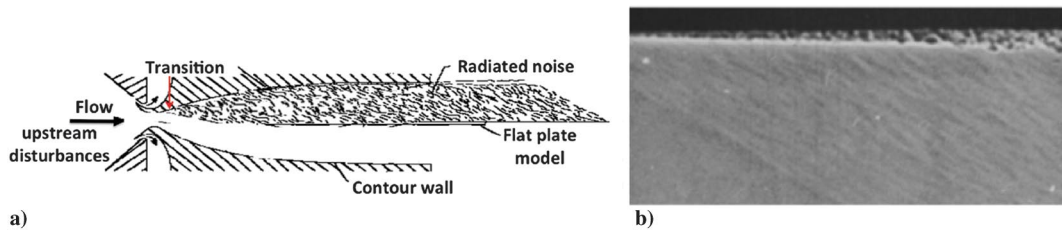


Fig. 3 Radiated noise from the tunnel-wall turbulent boundary layer in a Mach 3.5 wind tunnel. a) Schematic of test core [22]; b) experimental image of a shadowgraph (courtesy of NASA Langley).

single-wall boundary layer (Fig. 4) across a range of Mach numbers [23–27]. The DNS of acoustic radiation from a single-wall boundary layer circumvented the difficulties associated with the reflection/reverberation of acoustic waves from all sides of a wind-tunnel nozzle and thus helped clarify the physical process of acoustic noise generation. The physical realism and accuracy of the DNS flowfields have been established by comparison with existing experimental results at similar flow conditions. In particular, the coordinated experimental and numerical work undertaken by the international specialists group has led to the first successful comparison between numerical predictions and wind-tunnel measurements of surface pressure fluctuations underneath a hypersonic TBL, with the experimental data measured on the nozzle walls of the Purdue BAM6QT, Sandia HWT-8, and AEDC Tunnel 9 (Fig. 5). The pressure transducer models and the axial locations for each surface-pressure measurement are listed as follows: Purdue BAM6QT (PCB: $x_t = 2.679$ m; $Re = 9.69 \times 10^6$ /m); Sandia HWT-8 (Kulite: $x_t = 2.2024$ m and PCB: $x_t = 2.679$ m; $Re = 9.69 \times 10^6$ /m); AEDC Tunnel 9 Mach 14 (PCB: $x_t = 11.83$ m; $Re = 7.2 \times 10^6$ /m). Very good agreement of wall-pressure PSD between the DNS and the nozzle-wall measurements has been achieved at Mach 6 and 8. The DNS-predicted PSD deviates from the measured PSD at low frequencies for the Mach 14 case. The large disparity in von Kármán Reynolds numbers during the experiment and the DNS may have contributed to the discrepancy in wall pressure PSD; however, further work is necessary to identify the precise reasons and to resolve the differences at low frequencies. The cause of the spurious peak at $f \approx 40$ kHz in the wall-pressure PSD measured at Mach 14 is unknown and is currently under investigation.

The DNS database has provided access to tunnel-noise quantities that are difficult to obtain otherwise, including high-frequency PSD

(Fig. 6a), propagation speed (Fig. 6b), the inclination angle of the prominent acoustic structures (Fig. 7a), spatial and temporal correlations (Fig. 7b), and acoustic sources (Fig. 8). The low and high cutoff frequencies of the DNS-computed PSD are determined based on the temporal sampling size and grid resolution, respectively, and these frequencies have been monitored by statistical and grid convergence studies. The bulk propagation speed (Fig. 6b) is estimated as the ratio between the streamwise spatial distance between probe pairs and the time lags corresponding to the peak of the cross-correlation curve. The inclination angle of the prominent acoustic structures within the freestream region (Fig. 7a) is visualized by the gray contours of the density gradient. The statistically significant spatial acoustic structures in the freestream (Fig. 7b) are illustrated by a two-dimensional slice of line contours of the spatial correlation coefficient. The acoustic source terms (Fig. 8) are defined according to the acoustic analogy by Phillips [6]. DNS showed that tunnel noise consists of a field of broadband, stochastic acoustic waves that have a finite spatiotemporal coherence and propagate at oblique angles to the freestream, rather than as a deterministic train of time harmonic, planar waves as commonly assumed in receptivity studies. The acoustic sources that give rise to the pressure fluctuations in the freestream are located mostly in the inner layer of the tunnel-wall turbulent boundary layer and are strongly influenced by wall cooling, as seen from the differences in peak source location in Fig. 8 (see Ref. [24] for an explanation of this behavior). The inclination angle of the prominent structures associated with acoustic fluctuations within the freestream region, visualized by instantaneous contours of the density gradient as shown in Fig. 7a, is similar to the Mach angle for the relative Mach number M_r (between the sources and freestream). The findings are consistent with the classic theory of “eddy Mach-wave radiation” and the early measurements

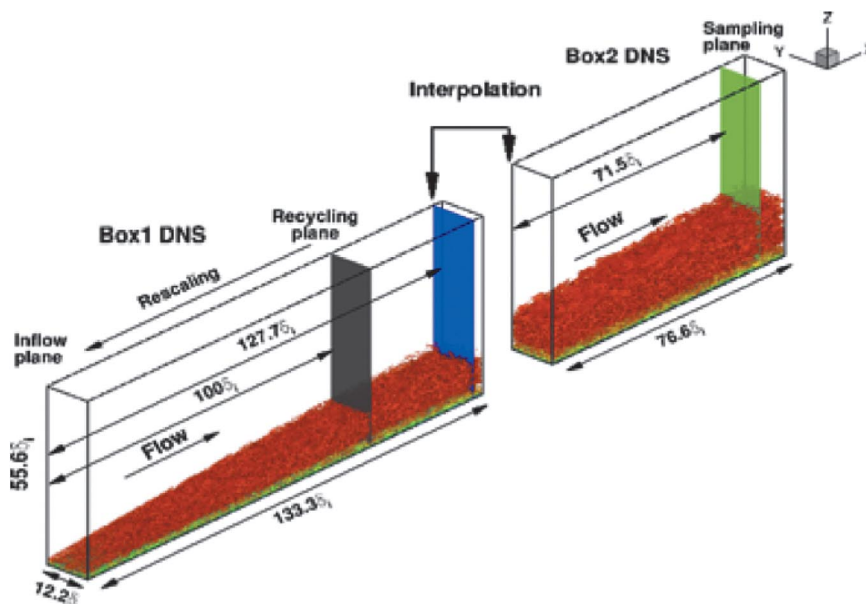


Fig. 4 Computational domain and simulation setup for DNS of a Mach 14 turbulent boundary layer with flow conditions representative of the nozzle exit of AEDC Tunnel 9 (from Fig. 1 [23]).

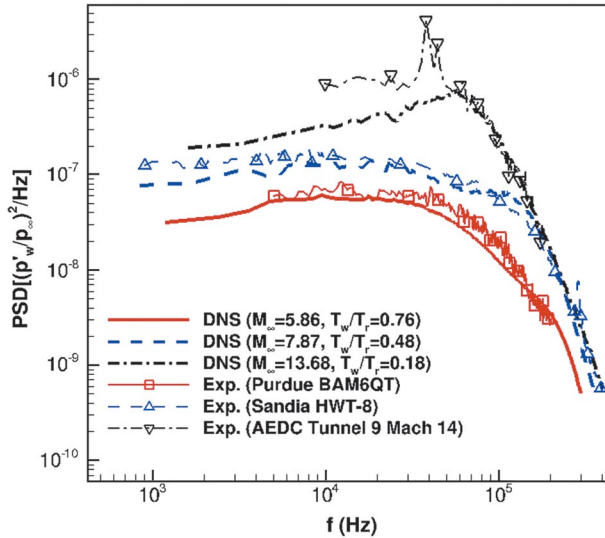


Fig. 5 Comparison between numerical predictions and wind-tunnel measurements of surface pressure fluctuations underneath a hypersonic TBL.

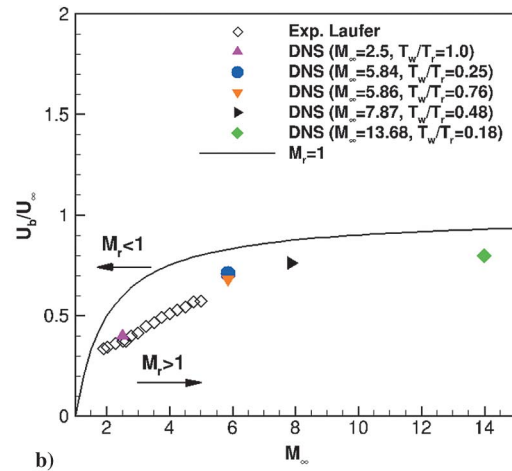
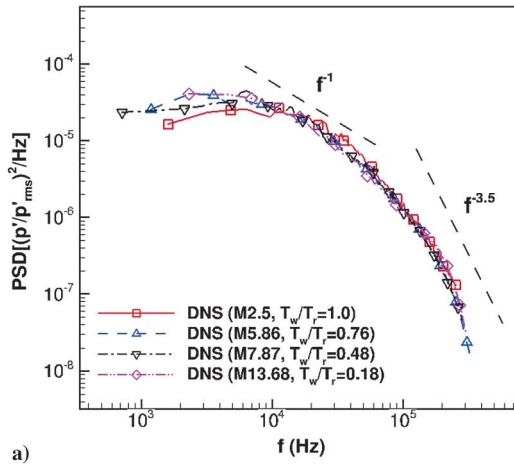


Fig. 6 Representations of a) power spectral density, and b) bulk propagation speed of the freestream acoustic pressure fluctuations as a function of the freestream Mach number.

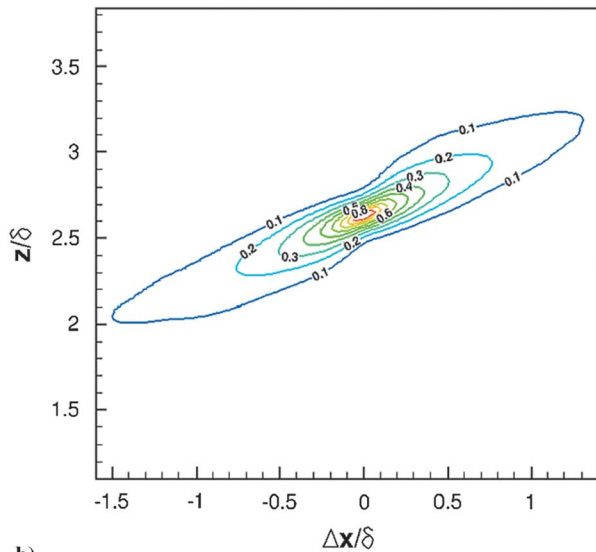
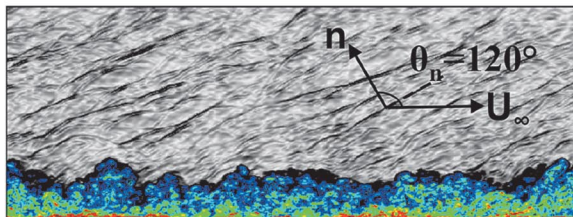


Fig. 7 Freestream acoustic structures radiated from a Mach 5.86 turbulent boundary layer at $T_w/T_r = 0.76$ [26]. a) Inclination angle visualized by instantaneous density gradient; b) streamwise wall-normal correlation coefficient.

of freestream noise by Laufer [3] during his unique wind-tunnel experiments.

After the feasibility of the DNS was established in the context of a single flat wall, the DNS conditions were extended to those within a confined enclosure to mimic the typical case of multiple tunnel walls in an experiment. DNS were carried out in stages corresponding to increasing complexity and computational cost, progressing from internal noise within a double-wall (channel) configuration [28] to an axisymmetric cylinder [29], and finally a full-scale nozzle of a hypersonic wind tunnel (Fig. 9). These simulations have shed light on the effect of geometry on the noise field and, in the future, would help enable practical applications of the simulation data for freestream disturbances in the context of actual wind-tunnel experiments. Detailed results of DNS with multiple tunnel walls were reported in Refs. [28–30].

The most recent outcome of these DNS studies was the simulation of acoustic disturbances within the nozzle of a Mach 6 Hypersonic Ludwig Tube, Braunschweig (HLB), at the Technical University of Braunschweig. The DNSs are carried out in two stages involving overlapping streamwise domains as shown in Fig. 9. The selected DNS domain covers the origin of most of the acoustic sources responsible for generating freestream noise in the test section because

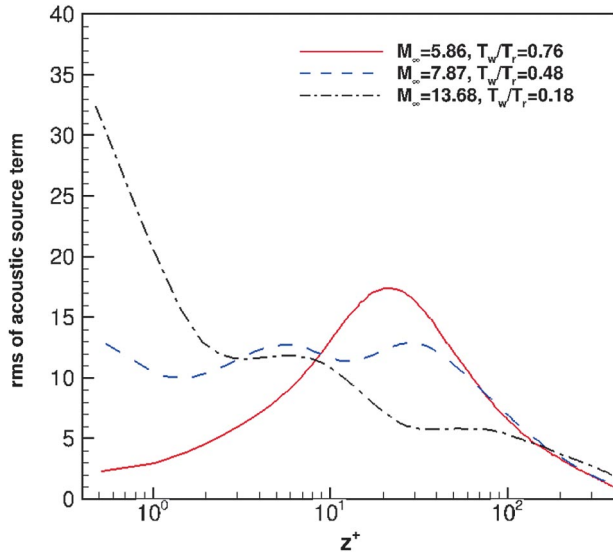


Fig. 8 Acoustic source terms, $(\partial u_i / \partial x_j)(\partial u_j / \partial x_i)$, normalized by δ^2 / U_∞^2 , of hypersonic turbulent boundary layers that give rise to the acoustic pressure fluctuations in the freestream.

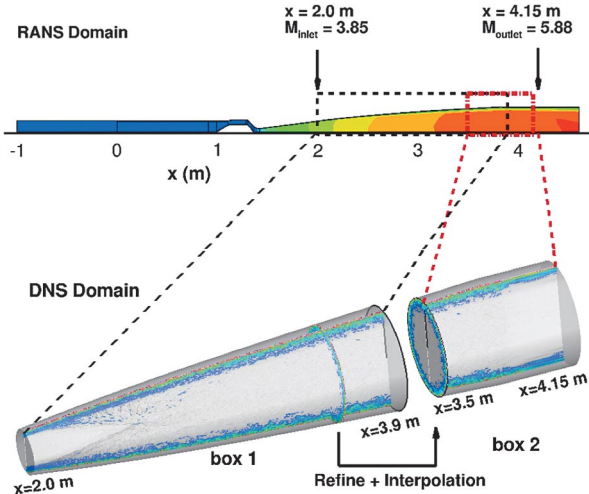


Fig. 9 DNS of acoustic disturbances within the nozzle of Mach 6 Hypersonic Ludwig Tube at the Technical University of Braunschweig.

it includes the portion of the nozzle with high freestream Mach numbers and, thus, with large intensity of noise radiation. The DNS inflow is extracted from a precursor Reynolds-averaged Navier-Stokes (RANS) calculation that simulates the full-domain HLB geometry, including the storage tube, fast acting valve, de Laval nozzle, and test section. The flow conditions of the DNS are representative of the operational conditions of HLB with $P_{0,\infty} = 7.3$ bar, $T_{0,\infty} = 470$ K, and the flow conditions are relevant to transition measurement. As seen at the top of Fig. 9, the HLB configuration starts from the storage tube ahead of the nozzle throat, which is located at $x \approx 1.41$ m. The nozzle spans from $x \approx 1.41$ m to $x \approx 3.8$ m, followed by the test section. The DNS domain starts slightly downstream of the nozzle throat at $x = 2.0$ m with a local freestream Mach number of $M_\infty = 3.85$ and ends in the test section region at $x = 4.15$ m, with a freestream Mach number of $M_\infty = 5.88$. Good comparison was achieved for the freestream Mach number distribution along the nozzle axis among DNS, RANS, and theory (Fig. 10). The DNS methodologies, including numerical methods, boundary conditions, and the grid resolutions, are similar to those described in Ref. [30].

Figure 11 shows an instantaneous visualization of the density gradient associated with the radiated acoustic field. The prominent structures associated with acoustic fluctuations within the freestream

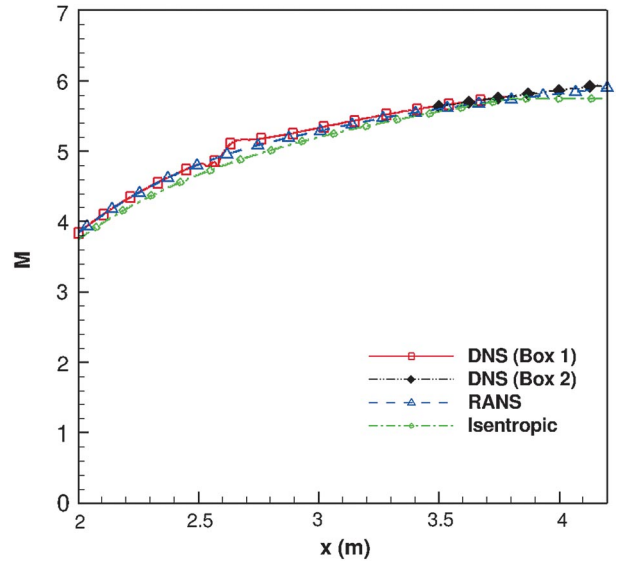


Fig. 10 Comparison of Mach number distribution along the HLB nozzle axis among DNS, RANS, and theory.

region exhibit a preferred orientation of $\theta = 28 \pm 2$ deg with respect to the nozzle centerline within the streamwise-radial plane. The preferred orientation is determined by inspecting instantaneous planar visualizations of the contours of the density gradient. This inclination angle in HLB is similar to that for a single flat plate (Fig. 7), considering that the nozzle wall upstream of the nozzle exit also forms an angle of approximately 3 deg with respect to the axis. The density gradients reveal the omnidirectional origin of the acoustic field within a given cross section of the nozzle, which adds to the stochastic nature of the wave front pattern at a given axial location. Because of the limited length of the nozzle and shallow acoustic propagation angles (with respect to the flow direction), the number of acoustic reflections from the nozzle wall that contribute to the acoustic signal at the nozzle exit plane is expected to be small. Thus, additional simulations are required to establish the relative contribution from those acoustic reflections (i.e., the reverberation effect).

Figure 12 shows that the rms pressure fluctuation field is nearly homogeneous outside the boundary layer, with a value of approximately 2.1% of the mean freestream pressure near the nozzle exit ($x = 3.8$ m). The preceding value of p'_{rms}/p_∞ outside the nozzle-wall boundary layer ($z_n/\delta > 1$) is significantly higher than that induced by the turbulent boundary layer over a single flat plate at a similar freestream Mach number. This increase in the noise intensity is believed to be caused by the combined effect of acoustic radiation arriving from different azimuthal segments of the axisymmetric nozzle wall. For both the nozzle and the flat plate, the DNS results show a similar frequency content and bulk propagation speed of freestream pressure fluctuations (Fig. 13).

The current simulations described in this section have paved the way for improved simulations including a larger section of the nozzle and the full test section downstream of the nozzle exit. Additionally, further analysis is required to establish the dependence of noise characteristics on the tunnel operating conditions such as the reservoir conditions and the unit Reynolds number; experimental measurements of the nozzle boundary-layer profiles are needed to provide further validation of the DNS and offer important scaling parameters to extrapolate noise characteristics to a different tunnel condition.

IV. Recovery of Tunnel Freestream Disturbances

Another area of the internationally coordinated research effort is to recover tunnel noise spectrum from pitot-probe measurements and characterize the modal contents of tunnel freestream disturbances by modal analysis. Freestream disturbances in a hypersonic wind tunnel

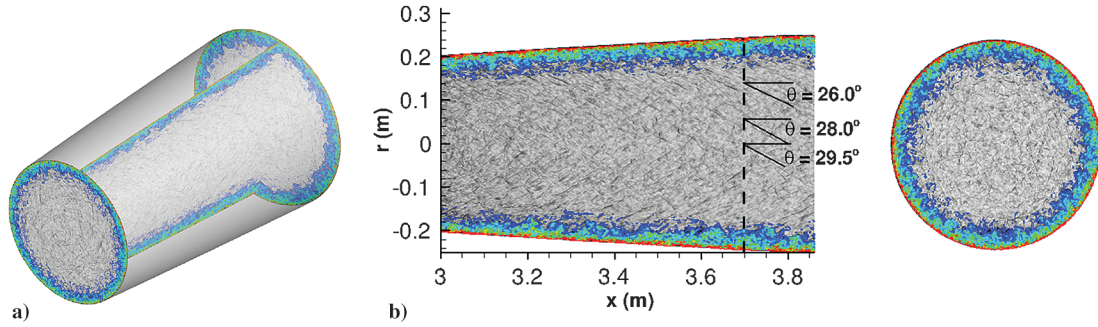


Fig. 11 Numerical schlieren images (i.e., density gradient contours) of radiated acoustic waves within the nozzle of HLB.

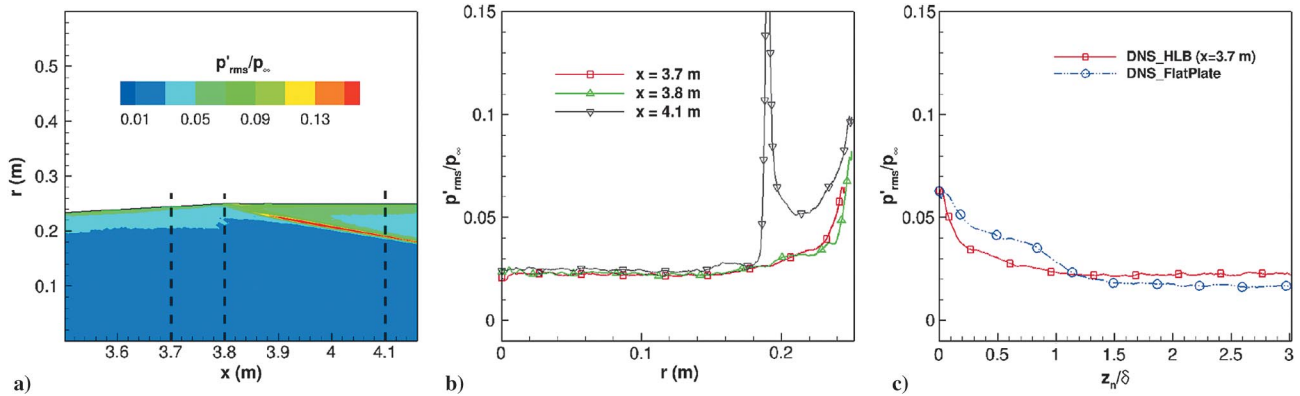


Fig. 12 RMS pressure fluctuation profile p'_{rms}/p_{∞} induced by the turbulent boundary layer over the HLB nozzle wall. $r = 0$ corresponds to the nozzle axis.

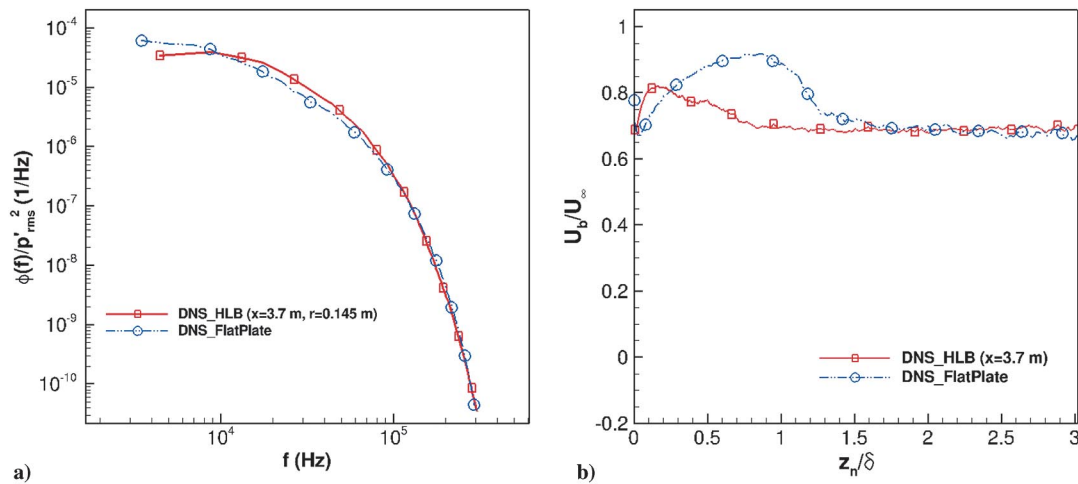


Fig. 13 Power spectral density and bulk propagation speed (defined according to Ref. [26]) of pressure fluctuations over the HLB nozzle wall and a single flat plate at similar freestream conditions.

pass through the bow shock and the stagnation region of a pitot probe before being measured by the transducer. Therefore, the relationship between the freestream disturbance spectrum and the transducer-measured spectrum, defined as the transfer function, was characterized to recover tunnel freestream spectrum from pitot-probe measurements. In addition, the pitot-probe transfer function was combined with hot-wire measurements to decompose freestream disturbances into the three Kovasznay's modes (i.e., acoustic, entropy, and vorticity modes) [31].

A. Recovery of Freestream Disturbance Spectrum from Hypersonic Pitot-Probe Measurements

Researchers have previously attempted to account for the difference between a pitot-probe-measured spectrum and a freestream spectrum,

including the so-called quasisteady analysis by Harvey et al. [32] and the unsteady analysis by Stainback and Wagner [33]. The quasisteady analysis was found to significantly underpredict the pitot-probe fluctuations. The unsteady analysis of Stainback and Wagner only accounts for the sound-wave mode of freestream disturbances and yields a transfer function that is independent of frequency and probe geometry; thus, it cannot be used to relate the transducer-measured spectrum to the freestream spectrum.

To derive a transfer function for recovering the PSD of preshock static pressure, the research team of the University of Minnesota constructed a method to compute the transfer function by using DNS of flow around pitot probes with imposed freestream disturbances. Pitot-probe geometries corresponding to recent characterizations of hypersonic facilities were considered at a variety of freestream

conditions and disturbance types. All disturbance types are parameterized by a single fluctuating quantity q' , which is pressure p' for acoustic disturbances and temperature T' for entropy disturbances. The imposed freestream disturbances were assumed to be homogeneous in the spanwise direction and consist of N discrete-frequency disturbances with the following form:

$$q'(t) = \sum_{k=1}^N q'_k \cos(\alpha_k x + \beta_k z - \omega_k t + \phi_k) \quad (1)$$

The normalized power spectral density is

$$\text{PSD}_k = \frac{1}{2} \left(\frac{q'_k}{\bar{q}} \right)^2 \quad (2)$$

In a simulation, the pressure within the transducer radius is first area-averaged to yield the pressure timetrace measured by the transducer. The timetrace of area-averaged pressure is then Fourier-decomposed to yield the transducer-measured PSD. The transfer function χ is defined as the ratio of transducer-measured PSD to freestream PSD:

$$\chi(f) = \frac{\text{PSD}_{t,k}}{\text{PSD}_{\infty,k}} \quad (3)$$

DNSs of flow around pitot probes were first conducted by the Minnesota team to characterize transfer functions for flow-parallel acoustic and entropy disturbances [34]. Flow-parallel acoustic disturbances are those whose wave-number vector is either aligned with ($\theta = 0$ deg) or opposite to ($\theta = 180$ deg) the bulk flow, commonly referred to as fast or slow acoustic waves. The transfer functions for flow-parallel acoustic disturbances were found to exhibit a geometry-dependent resonance. For the current work, the Minnesota team conducted subsequent DNS for freestream acoustic disturbances inclined at $\theta = 120$ deg, with probe geometries and flow conditions corresponding to those in the Purdue BAM6QT facility. The incident angle of 120 deg is similar to the angle of acoustic radiation from the nozzle-wall turbulent boundary layer (Fig. 7).

Figure 14 shows the DNS predictions for the transfer functions of angled freestream acoustic disturbances ($\theta = 120$ deg) with and without area averaging and their comparison with flow-parallel slow acoustic disturbances ($\theta = 180$ deg) computed previously [34]. The transfer function exhibits a geometry-dependent resonance; the acoustic disturbance angle has a large effect on the transfer function, resulting in a smaller resonant frequency and a lower amplification factor for angled freestream acoustic disturbances than for flow-parallel freestream disturbances. Because of phase interference on the face of the pitot probe at high frequencies, the transfer function for angled acoustic disturbances shows a dependence on the area of the active sensing element, as indicated by the difference in face-averaged and stagnation-point transfer functions. Moreover, destructive interference can occur when the disturbance wavelength is similar to or smaller than the size of the transducer, causing an essentially zero transfer function at high frequencies ($f \gtrsim 200$ kHz for a transducer radius of 0.83 mm as shown in Fig. 14) when the face average is applied across the entire face of the transducer.

The DNS predictions for transfer functions were compared to experimental measurements in the Purdue BAM6QT facility. The pitot-probe geometries used in the experiments include four geometries; each uses the same sensing element with different flush-mounted shrouds to investigate the effect of probe geometry (Table 1). Figure 15 gives a picture of the probes used in the experiments. The experimental data were collected during two different weeks, referred to as entry 1 and entry 2. Given that the freestream disturbance spectra PSD_{∞} cannot be directly measured in an experiment, comparisons between DNS and experiments were done in terms of the ratio of transfer functions S with two different probe geometries:

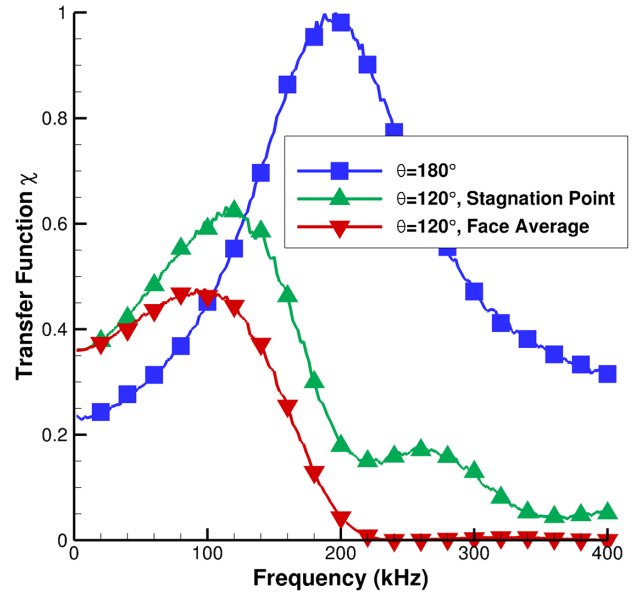


Fig. 14 Transfer function for no-sleeve pitot-probe geometry with angled freestream acoustic disturbances (flow-parallel slow acoustic disturbance included for comparison).

$$S_{a,b}(f) \equiv \frac{\chi_a}{\chi_b} = \frac{\text{PSD}_a}{\text{PSD}_b} \quad (4)$$

The quantity S is defined as the ratio between probes as shown and is a frequency-dependent function. Figure 16 shows the ratio of each sleeved geometry to the no-sleeve geometry for both simulation and experiment. For example, $R_{\text{large}} \equiv S_{\text{large-sleeve, no-sleeve}}$. The DNS for $\theta = 0$ deg corresponds to that reported in Chaudhry and Candler [34]. At this angle, the ratio of transfer functions shows a peaky behavior caused by resonance due to an acoustic disturbance reflecting between the shock and the pitot-probe face, and this resonance is further amplified by the focusing effect of shock curvature. Such a peaky behavior in transfer functions at $\theta = 0$ deg was discussed and justified in the previous publication [34]. For all the Reynolds numbers and probe geometries in Fig. 16, the angled acoustic disturbances ($\theta = 120$ deg) produce a much better match to experimental data than flow-parallel fast acoustic disturbances ($\theta = 0$ deg) [34]. The results suggest that, with judiciously imposed freestream disturbances, the method of computing the transfer function using DNS of flow around pitot probes holds the potential to ultimately be used to replace the unsteady approach of Stainback and Wagner [33] for recovering freestream disturbance spectrum from stagnation pressure spectrum for hypersonic pitot probes. Experiments and DNS also suggest an unexpected dependence of transfer functions on sleeve geometries and Reynolds numbers. The cause for such dependence is unknown and is currently under investigation.

B. Kovasznay Modal Decomposition

To better characterize the nature and origin of freestream disturbances in a high-speed wind tunnel, a new modal decomposition method was proposed to decompose wind-tunnel freestream disturbances into three modes of covarying physical properties: an acoustic or sound-wave mode (isentropic variation of

Table 1 Pitot-probe geometries used to characterize freestream disturbance levels in the Purdue BAM6QT facility

Probe name	Transducer radius, mm	Total radius, mm
No sleeve	0.83	0.83
Small sleeve	0.83	1.50
Medium sleeve	0.83	3.00
Large sleeve	0.83	3.60



Fig. 15 Pictures of pitot-probe geometries used in the experiments.

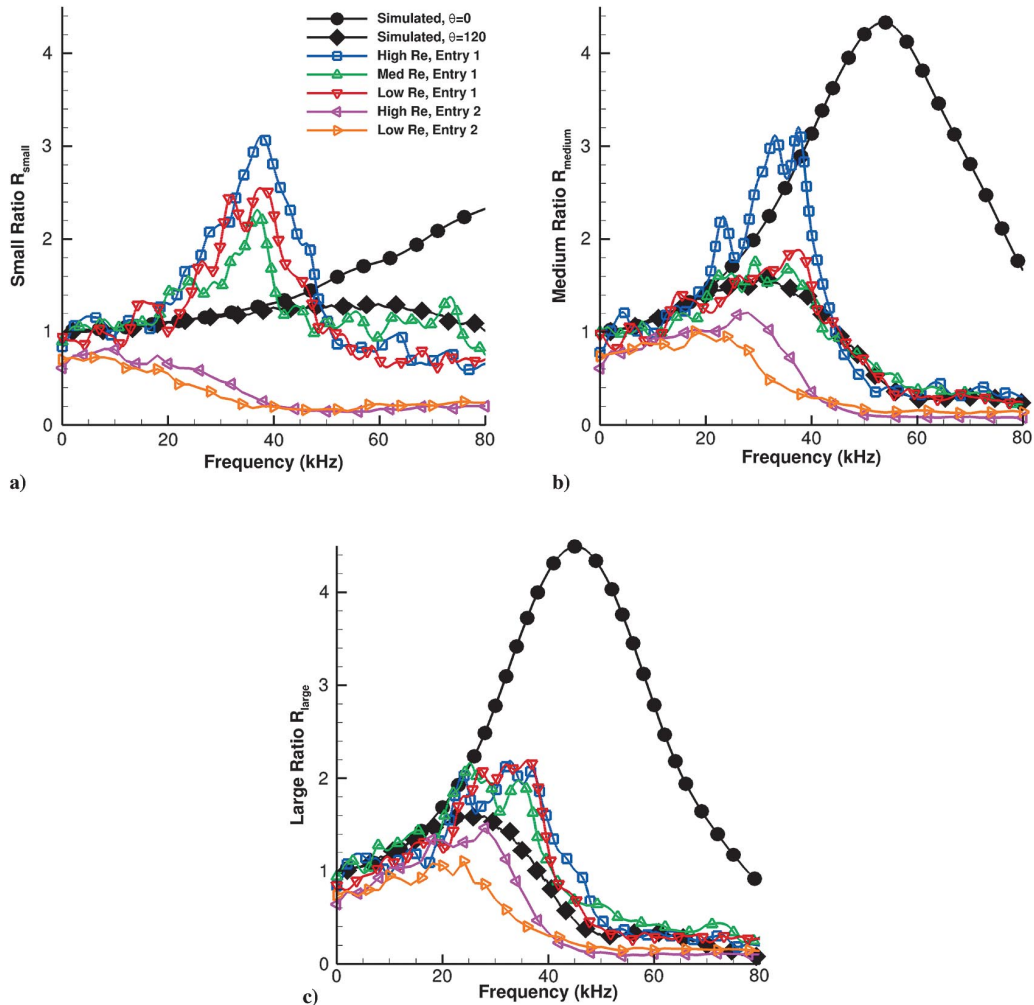


Fig. 16 Ratio of transfer functions with two pitot-probe geometries, comparing experiment to simulation. High Re : $Re \approx 11.5 \times 10^6/m$; med Re : $Re \approx 8.64 \times 10^6/m$; low Re : $Re \approx 3.01 \times 10^6/m$.

pressure, density, and temperature as well as that of the coupled irrotational velocity field); an entropy mode (isobaric variation of entropy, density, and temperature, also mentioned as entropy or temperature spottiness); and a vorticity mode (variation of the solenoidal component of the velocity field, which is known as simple “turbulence” at low speeds). The concept and analytics of modal analysis go back to Kovasznay [31] and Morkovin [1].

Early experimental investigations by Kovasznay [31], Morkovin [1], and Laufer [2], using hot-wire measurements, made use of the analytics to characterize supersonic wind-tunnel flows. Later, Stainback and Wagner [33] conducted hot-wire and pitot-probe measurements and compared resulting pressure fluctuations. Because hot-wire measurements yield fluctuations of static pressure and pitot probes measure total pressure, Stainback and Wagner [33] introduced an ansatz for the transfer function relating preshock static and postshock total pressure fluctuations. Logan [35] proposed a new hot-wire modal analysis by considering separate static pressure fluctuation measurements using nonintrusive laser-induced fluorescence. The method of Logan was afterward applied by Masutti et al. [15], Wu et al. [36], and Schilden et al. [37] among others using pitot probes and applying the transfer function by Stainback and Wagner [33]. Static pressure fluctuations due to vorticity and entropy fluctuations are neglected. They are generated during the interaction of the aforementioned disturbances with the shock wave upstream of the pitot probe [38,39].

Another experimental and numerical approach using purely stagnation point probes (SPPs) was introduced by Schilden et al. [37]. This modal decomposition method was based on total pressure and stagnation point heat flux fluctuations to decompose freestream disturbances via a sensitivity matrix containing transfer functions between the measured quantities and acoustic and entropy mode computed in DNS. Schilden and Schröder [40] showed that the proposed method is limited to a very low Strouhal number of the incident disturbances (i.e., the heat flux probe has to be very small to perceive essential postshock entropy modes). At this point, the hot wire is a promising alternative to the rather large SPP because it is basically a very small heat flux probe. On the other hand, the transfer functions of Schilden and Schröder [40] or Chaudhry and Candler [34] relating postshock total pressure to preshock acoustic and entropy disturbances could be used to replace the transfer function of Stainback and Wagner [33] in the hot-wire method. Therefore, the hot-wire and SPP modal decomposition methods can be merged.

The research teams of RWTH Aachen and TU Braunschweig proposed an improved technique for conducting combined modal analysis with data provided by hot wire and pitot probe. Instead of using the transfer function of Stainback and Wagner [33], a sensitivity matrix containing the transfer functions between freestream disturbances and hot-wire and pitot data is used. The new combined modal decomposition method is described as follows.

1. Data Acquisition

The voltage applied to a hot wire E at constant temperature varies to compensate changes of heat loss due to flow disturbances. The heat loss is sensitive to mass flow $\dot{m} = \rho u$ and total temperature T_0 . The corresponding transfer functions $k_{\dot{m}}$ and k_{T_0} in

$$\frac{dE}{E} = k_{\dot{m}} \frac{d\dot{m}}{\dot{m}} + k_{T_0} \frac{dT_0}{T_0} \quad (5)$$

are unknown. Voltage data postprocessing yields normalized rms values $\langle \cdot \rangle$ (NRMS) of mass flow fluctuations $\langle \dot{m} \rangle$, total temperature $\langle T_0 \rangle$, and their correlation $R_{\dot{m},T_0}$ [31,36]. For the later modal decomposition, the three quantities are combined to two hot-wire variables:

$$\langle H_{p,s} \rangle^2 = \beta^2 \langle \dot{m} \rangle^2 + \langle T_0 \rangle^2 - 2\beta R_{\dot{m},T_0} \quad (6)$$

$$\langle H_{p,u} \rangle^2 = \alpha^2 \langle \dot{m} \rangle^2 + \langle T_0 \rangle^2 + 2\alpha R_{\dot{m},T_0} \quad (7)$$

The coefficients α and β are a function of the Mach number M and the heat capacity ratio γ .

A pitot probe measures total pressure p_0 , which contains acoustic pressure dp and entropy fluctuations ds :

$$\frac{dp_0}{p_0} = \frac{r_{ac}}{\gamma} \frac{dp}{p} + r_{en} \frac{ds}{C_p} \quad (8)$$

The transfer functions r_{ac} and r_{en} in Eq. (8) are formulated with respect to the preshock density fluctuations:

$$r_i = \frac{dp_0}{p_0} \frac{\rho_\infty}{dp_i} \quad (9)$$

The ratio of preshock average density and postshock total pressure normalizes the transfer functions. Introducing NRMS values and neglecting any correlation between acoustic and entropy waves, Eq. (8) becomes

$$\langle P \rangle^2 = \left(\frac{r_{ac}}{\gamma} \right)^2 \langle p \rangle^2 + r_{en}^2 \langle s \rangle^2 \quad (10)$$

$\langle P \rangle = \langle p_0 \rangle$ denotes the data of the pitot pressure measurements, which are plugged into the modal decomposition method.

2. Modal Decomposition

Following the procedure of Logan [35], we start with the mass flow rate, the equation of state for ideal gas and the energy equation for inviscid flows, differentiate, and rewrite the system of equations for NRMS values to gain

$$\langle H_{p,u} \rangle^2 = \alpha^2 \langle p \rangle^2 + \theta^2 \langle u \rangle^2 + 2\alpha\theta R_{p,u} \quad (11)$$

$$\langle H_{p,s} \rangle^2 = \zeta^2 \langle p \rangle^2 + \theta^2 \langle s \rangle^2 \quad (12)$$

under the aforementioned assumption of uncorrelated acoustic and entropy modes. The coefficients ζ and θ again depend on the Mach number and the heat capacity ratio. The remaining correlation term in Eq. (11) can be expressed as a perfectly correlated slow acoustic wave $R_{p,u} = -\langle p \rangle^2 / \gamma M$. Finally, the velocity fluctuations $\langle u \rangle$ have to be split into the acoustic mode and vorticity mode contributions. Assuming no correlation between these disturbance types, $\langle u \rangle^2 = \langle u_{ac} \rangle^2 + \langle u_{vo} \rangle^2$ holds. The velocity fluctuations $\langle u_{ac} \rangle$ are again expressed by the pressure fluctuations of a slow acoustic wave. The complete system of equations of the modal decomposition can be written as

$$\langle H_{p,u} \rangle^2 = \psi^2 \langle p \rangle^2 + \theta^2 \langle u_{vo} \rangle^2 \quad (13)$$

$$\langle H_{p,s} \rangle^2 = \zeta^2 \langle p \rangle^2 + \theta^2 \langle s \rangle^2 \quad (14)$$

$$\langle P \rangle^2 = \left(\frac{r_{ac}}{\gamma} \right)^2 \langle p \rangle^2 + r_{en}^2 \langle s \rangle^2 \quad (15)$$

In Eq. (13), ψ is a function of Mach number and heat capacity ratio. The first two equations resemble the original equations of Logan [35]. The vorticity mode definition (i.e., velocity fluctuations $\langle u \rangle^2$ minus the contribution of the acoustic wave $\langle u_{ac} \rangle^2$) is incorporated. The last equation is extracted from the SPP method. The transfer functions r_{ac} and r_{en} are computed in DNS and capture the frequency dependence present in SPP measurements. The consideration of the frequency dependence is crucial to apply Eqs. (13–15) to bandpass-filtered data. In short, the modal analysis can be written $F_w = SF_\infty$ by using $F_w = (\langle H_{p,u} \rangle^2, \langle H_{p,s} \rangle^2, \langle P \rangle^2)^T$ and $F_\infty = (\langle p \rangle^2, \langle s \rangle^2, \langle u_{vo} \rangle^2)^T$. S is the sensitivity matrix containing the transfer functions between freestream disturbances and hot-wire and pitot data.

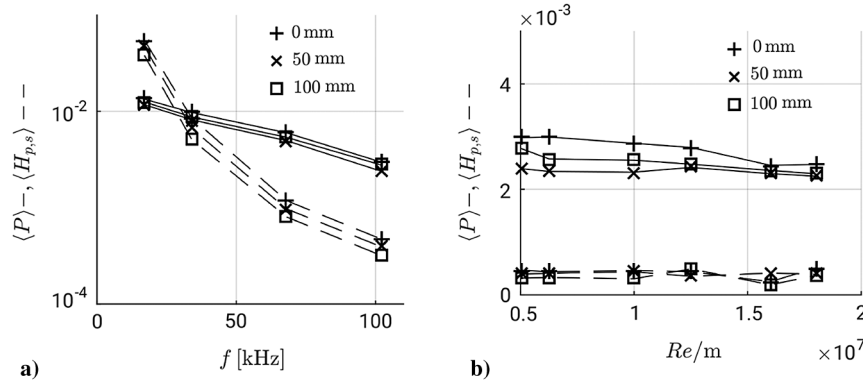


Fig. 17 Experimental bandpass filtered hot-wire $\langle H_{p,s} \rangle$ and SPP $\langle P \rangle$ data from the Hypersonic Ludwig Tube of the Technical University Braunschweig.

3. Stagnation Point Probe and Combined Hot-Wire Freestream Disturbances

Experimental data of F_w (i.e., SPP data $\langle P \rangle$ and combined hot-wire data $\langle H_{p,u} \rangle$ and $\langle H_{p,s} \rangle$) were measured at three radial positions in HLB at varying unit Reynolds numbers from 5×10^6 to $18 \times 10^6/\text{m}$. The measurement locations are on the centerline and 50 and 100 mm off the centerline. In Fig. 17, the left-hand sides of Eqs. (14) and (15) are shown, where the dashed line represents the hot-wire data, the solid line is the SPP data, and the symbols indicate the distance to the centerline of the wind tunnel. According to the final system of equations of the modal decomposition, only the acoustic and entropy mode contribute to $\langle H_{p,s} \rangle$ and $\langle P \rangle$. Bandpass-filtered data at unit Reynolds number $Re = 5 \times 10^6/\text{m}$ are shown in Fig. 17a to illustrate the frequency effect. The acoustic and entropy noise in the wind tunnel leads to different trends in $\langle H_{p,s} \rangle$ and $\langle P \rangle$. Whereas the total pressure decays exponentially with increasing frequency, the combined hot-wire variable shows a spectral decay of type f^{-m} using a log-log scale (not shown here). The centerline data always contain the most intense disturbances. The dependence on unit Reynolds number in Fig. 17b is very small at a frequency of $f = 102$ kHz. To apply the previously derived modal decomposition method to the measured freestream disturbance variables F_w , we want to determine all transfer functions in the sensitivity matrix S , thus accounting for frequency dependence and the inclination of incident acoustic waves.

V. Conclusions

This paper outlines some of the coordinated experimental and numerical work by the NATO STO AVT-240 specialists group that yielded freestream disturbance data that are physically relevant for transition processes in hypersonic flows. New freestream disturbance measurements with fast-response pressure transducers mounted on a variety of probes were performed and provided spectral data up to the high frequencies of relevance to second-mode instabilities. Direct numerical simulation (DNS) of high-speed turbulent boundary layers and their acoustic radiation were conducted to allow direct computation of the stochastic disturbance field within the free stream. The DNS studies of acoustic radiation have overcome difficulties in experimental measurements and provided access to both flow and acoustic quantities that are difficult to obtain otherwise, including the acoustic disturbance angle, the propagation speed, and the acoustic sources. DNSs of flow around a pitot probe were performed to cover the transfer of disturbances to the detailed location of the flow sensor as mounted in the probe, resulting in the recovery of freestream disturbance spectrum from the transducer-measured spectrum. In particular, the DNS study showed that the acoustic angle has a large effect on the pitot-probe transfer function, and the results for angled disturbances, with an incident acoustic angle similar to that of acoustic radiation from the nozzle wall, agreed much more closely with the experimental measurements. A new modal decomposition method was proposed to decompose hot-wire and pitot-probe measurements of freestream disturbances into the three Kovasznay modes (i.e., acoustic, entropy, and vorticity modes). By replacing the pitot-probe transfer function by Stainback and Wagner [33] with the DNS-predicted pitot-

probe transfer function by Schilden and Schröder [40], the new combined modal decomposition method can yield rms values of modal amplitudes within a selected frequency band. In all, the joint effort of the specialists group has resulted in a significantly improved knowledge base pertaining to the nature and spectral contents of wind-tunnel freestream disturbances, with the purpose of quantifying the stochastic input to the receptivity process in a broadband disturbance environment of conventional, cold-flow hypersonic wind tunnels. Because of the need to employ conventional tunnels for a majority of ground testing involving large-scale models, such knowledge base is essential for the reliable extrapolation of wind-tunnel data to in-flight transition.

It should also be emphasized that the objective of the current research was to investigate the building block components to facilitate further progress, and much work remains to be done to achieve the ultimate goal of developing a disturbance field algorithm as input for transition computations. Follow-on studies should include boundary-layer receptivity to a tunnel-like disturbance field (i.e., the response of a laminar boundary layer to acoustic disturbances radiated from nozzle wall) that relates the freestream disturbance field to the initial amplitude of instability waves in the laminar boundary layer. Such receptivity computations can then be used to calibrate a tunnel noise model that reflects the observed dependence of transition onset on the facility disturbance environment. In addition to studying boundary-layer receptivity, further pitot-probe simulations with more generalized inflow freestream disturbances are necessary to generate a simplified model of the transfer function that could ultimately be used to replace the unsteady approach of Stainback and Wagner [33] for recovering input disturbance spectrum for transition computations from pitot-probe measurement.

Acknowledgments

This work was sponsored by the U.S. Air Force Office of Scientific Research (under grants FA9550-14-1-0170, FA9550-17-1-0250, and FA9550-12-1-0167). Partial support was also provided by the Office of Naval Research (under grant N00014-17-1-2347) and National Science Foundation (under grant CBET-1706894). Computational resources were provided by the U.S. Department of Defense High Performance Computing Modernization Program, the NASA Advanced Supercomputing Division, and the National Science Foundation Petascale Computing Resource Allocations Program (under grant ACI-1640865). Eric Marineau would like to acknowledge the Test Resource Management Center T&E/S&T HSST program for their funding as part of the Center of Testing Excellence. The views and conclusions contained herein are those of the authors and should not be interpreted as necessarily representing the official policies or endorsements, either expressed or implied, of the funding agencies or the U.S. Government. Sandia National Laboratories is a multimission laboratory managed and operated by National Technology and Engineering Solutions of Sandia, LLC., a wholly owned subsidiary of Honeywell International, Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525. This paper describes objective

technical results and analysis. Any subjective views or opinions that might be expressed in the paper do not necessarily represent the views of the U.S. Department of Energy or the U.S. Government.

References

- [1] Morkovin, M. V., "On Transition Experiments at Moderate Supersonic Speeds," *Journal of the Aeronautical Sciences*, Vol. 24, No. 7, 1957, pp. 480–486.
doi:10.2514/8.3887
- [2] Laufer, J., "Aerodynamic Noise in Supersonic Wind Tunnels," *Journal of Aerospace Sciences*, Vol. 28, No. 9, 1961, pp. 685–692.
doi:10.2514/8.9150
- [3] Laufer, J., "Some Statistical Properties of the Pressure Field Radiated by a Turbulent Boundary Layer," *Physics of Fluids*, Vol. 7, No. 8, 1964, pp. 1191–1197.
doi:10.1063/1.1711360
- [4] Pate, S. R., "Measurements and Correlations of Transition Reynolds Numbers on Sharp Slender Cones at High Speeds," *AIAA Journal*, Vol. 9, No. 6, 1971, pp. 1082–1090.
doi:10.2514/3.49919
- [5] Stetson, K. F., "Nosetip Bluntness Effects on Cone Frustum Boundary-Layer Transition in Hypersonic Flow," *16th Fluid and Plasmadynamics Conference*, AIAA Paper 1983-1763, 1983.
- [6] Phillips, O. M., "On the Generation of Sound by Supersonic Turbulent Shear Layers," *Journal of Fluid Mechanics*, Vol. 9, No. 1, 1960, pp. 1–28.
doi:10.1017/S0022112060000888
- [7] Ffowcs-Williams, J. E., and Maidanik, G., "The Mach Wave Field Radiated by Supersonic Turbulent Shear Flows," *Journal of Fluid Mechanics*, Vol. 21, No. 4, 1965, pp. 641–657.
doi:10.1017/S0022112065000393
- [8] Schneider, S. P., "Development of Hypersonic Quiet Tunnels," *Journal of Spacecraft and Rockets*, Vol. 45, No. 4, 2008, pp. 641–664.
doi:10.2514/1.34489
- [9] Schneider, S. P., "Effects of High-Speed Tunnel Noise on Laminar-Turbulent Transition," *Journal of Spacecraft and Rockets*, Vol. 38, No. 3, 2001, pp. 323–333.
doi:10.2514/2.3705
- [10] Marineau, E. C., Moraru, C. G., Lewis, D. R., Norris, J. D., Lafferty, J. F., and Johnson, H. B., "Investigation of Mach 10 Boundary Layer Stability of Sharp Cones at Angle-of-Attack, Part 1: Experiments," *53rd AIAA Aerospace Sciences Meeting*, AIAA Paper 2015-1737, 2015.
- [11] Kendall, J. M., "Supersonic Boundary Layer Transition Studies," *JPL Space Program Summary*, Vol. 3, April 1970, pp. 43–47.
- [12] Donaldson, J., and Coulter, S., "A Review of Free-Stream Flow Fluctuation and Steady-State Flow Quality Measurements in the AEDC/VKF Supersonic Tunnel A and Hypersonic Tunnel B," AIAA Paper 1995-6137, 1995.
- [13] Lafferty, J. F., and Norris, J. D., "Measurements of Fluctuating Pilot Pressure, Tunnel Noise in the AEDC Hypervelocity Wind Tunnel No. 9," AIAA Paper 2007-1678, 2007.
- [14] Bounitch, A., Lewis, D. R., and Lafferty, J. F., "Improved Measurements of 'Tunnel Noise' Pressure Fluctuations in the AEDC Hypervelocity Wind Tunnel No. 9," AIAA Paper 2011-1200, 2011.
- [15] Masutti, M., Chazot, E., and Carbo, M., "Disturbance Level Characterization of a Hypersonic Blow-Down Facility," *AIAA Journal*, Vol. 50, No. 12, 2012, pp. 2720–2730.
doi:10.2514/1.J051502
- [16] Laufer, J., "Sound Radiation from a Turbulent Boundary Layer," *Proceedings of the Marseille Conference on Turbulence*, Editions de Centre National de la Recherche Scientifique Rept. 108, Paris, 1962.
- [17] Schneider, S. P., "Experiment of the Two-Dimensional Roughness Effect on Hypersonic Boundary-Layer Transition," *Journal of Spacecraft and Rockets*, Vol. 43, No. 4, 2006, pp. 731–738.
doi:10.2514/1.17860
- [18] Parziale, N. J., Shepherd, J. E., and Hornung, H. G., "Free-Stream Density Perturbations in a Reflected-Shock Tunnel," *Experiments in Fluids*, Vol. 55, No. 1665, 2014, pp. 1–10.
- [19] Pate, S. R., "Dominance of Radiated Aerodynamic Noise on Boundary-Layer Transition in Supersonic-Hypersonic Wind Tunnels," Arnold Engineering Development Center TR-77-107, Arnold Air Force Station, TN, March 1978.
- [20] Pate, S. R., "Effects of Wind Tunnel Disturbances on Boundary-Layer Transition with Emphasis on Radiated Noise," AIAA Paper 1980-0431, March 1980.
- [21] Marineau, E. C., "Prediction Methodology for Second-Mode-Dominated Boundary Layer Transition in Hypersonic Wind Tunnels," *AIAA Journal*, Vol. 55, No. 2, 2017, pp. 484–499.
doi:10.2514/1.J055061
- [22] Beckwith, I. E., and Miller, C. G., "Aerothermodynamics and Transition in High-Speed Wind Tunnels at NASA Langley," *Annual Review of Fluid Mechanics*, Vol. 22, 1990, pp. 419–439.
doi:10.1146/annurev.fl.22.010190.002223
- [23] Zhang, C., Duan, L., and Choudhari, M. M., "Acoustic Radiation from a Mach 14 Turbulent Boundary Layers," *54th AIAA Aerospace Sciences Meeting*, AIAA Paper 2016-0048, 2016.
- [24] Zhang, C., Duan, L., and Choudhari, M. M., "Effect of Wall Cooling on Boundary Layer Induced Pressure Fluctuations at Mach 6," *Journal of Fluid Mechanics*, Vol. 822, July 2017, pp. 5–30.
doi:10.1017/jfm.2017.212
- [25] Duan, L., Choudhari, M. M., and Wu, M., "Numerical Study of Pressure Fluctuations Due to a Supersonic Turbulent Boundary Layer," *Journal of Fluid Mechanics*, Vol. 746, May 2014, pp. 165–192.
doi:10.1017/jfm.2014.116
- [26] Duan, L., Choudhari, M. M., and Zhang, C., "Pressure Fluctuations Induced by a Hypersonic Turbulent Boundary Layer," *Journal of Fluid Mechanics*, Vol. 804, Oct. 2016, pp. 578–607.
doi:10.1017/jfm.2016.548
- [27] Duan, L., and Choudhari, M. M., "Analysis of Numerical Simulation Database for Pressure Fluctuations Induced by High-Speed Turbulent Boundary Layers," *20th AIAA/CEAS Aeroacoustics Conference*, AIAA Paper 2014-2912, 2014.
- [28] Zhang, C., and Duan, L., "Acoustic Radiation from High-Speed Turbulent Boundary Layers in a Tunnel-Like Environment," *53rd AIAA Aerospace Sciences Meeting*, AIAA Paper 2015-0836, 2015.
- [29] Huang, J., Zhang, C., Duan, L., and Choudhari, M. M., "Direct Numerical Simulation of Hypersonic Turbulent Boundary Layers inside an Axisymmetric Nozzle," *55th AIAA Aerospace Sciences Meeting*, AIAA Paper 2017-0067, 2017.
- [30] Huang, J., Duan, L., and Choudhari, M. M., "Direct Numerical Simulation of Acoustic Noise Generation from the Nozzle Wall of a Hypersonic Wind Tunnel," *47th AIAA Fluid Dynamics Conference*, AIAA Paper 2017-3631, 2017.
- [31] Kovasznay, L. S. G., "Turbulence in Supersonic Flow," *Journal of Aeronautical Sciences*, Vol. 20, No. 10, 1953, pp. 657–674.
doi:10.2514/8.2793
- [32] Harvey, W. D., Bushnell, D. M., and Beckwith, I. E., "Fluctuating Properties of Turbulent Boundary Layers for Mach Numbers up to 9," NASA TN-D-5496, 1969.
- [33] Stainback, P. C., and Wagner, R. D., "A Comparison of Disturbance Levels Measured in Hypersonic Tunnels Using a Hot-Wire Anemometer and a Pitot Pressure Probe," *7th Aerodynamic Testing Conference*, AIAA Paper 1988-1003, Oct. 1972.
- [34] Chaudhry, R. S., and Candler, G. V., "Computing Measured Spectra from Hypersonic Pitot Probes with Flow-Parallel Freestream Disturbances," *AIAA Journal*, Vol. 55, No. 12, 2017, pp. 4155–4166.
doi:10.2514/1.J055396
- [35] Logan, P., "Modal Analysis of Hot-Wire Measurements in Supersonic Turbulence," *26th Aerospace Sciences Meeting*, AIAA Paper 1988-0423, 1988.
- [36] Wu, J., Zamre, P., and Radespiel, R., "Flow Quality Experiment in a Tandem Nozzle Wind Tunnel at Mach 3," *Experiments in Fluids*, Vol. 56, No. 1, 2015, pp. 20–37.
doi:10.1007/s00348-014-1887-1
- [37] Schilden, T., Schröder, W., Ali, S. R. C., Schreyer, A. M., Wu, J., and Radespiel, R., "Analysis of Acoustic and Entropy Disturbances in a Hypersonic Wind Tunnel," *Physics of Fluids*, Vol. 28, No. 5, 2016, Paper 056104.
doi:10.1063/1.4948435
- [38] McKenzie, J. F., "Interaction of Linear Waves with Oblique Shock Waves," *Physics of Fluids*, Vol. 11, No. 11, 1968, pp. 2350–2362.
doi:10.1063/1.1691825
- [39] Anyiwo, J. C., and Bushnell, D. M., "Turbulence Amplification in Shock-Wave Boundary-Layer Interaction," *AIAA Journal*, Vol. 20, No. 7, 1982, pp. 893–899.
doi:10.2514/3.7954
- [40] Schilden, T., and Schröder, W., "Numerical Analysis of High Speed Wind Tunnel Flow Disturbance Measurements Using Stagnation Point Probes," *Journal of Fluid Mechanics*, Vol. 833, Dec. 2017, pp. 247–273.
doi:10.1017/jfm.2017.674

R. M. Cummings
Associate Editor