

What is the Smallest Earthquake Magnitude that Needs to be Considered in Assessing Liquefaction Hazard?

Russell A. Green,^{a)} M.EERI, and Julian J. Bommer,^{b)} M.EERI

Probabilistic assessments of the potential impact of earthquakes on infrastructure entails the consideration of smaller magnitude events than those generally considered in deterministic hazard and risk assessments. In this context, it is useful to establish if there is a magnitude threshold below which the possibility of triggering liquefaction can be discounted because such a lower bound is required for probabilistic liquefaction hazard analyses. Based on field observations and a simple parametric study, we conclude that earthquakes as small as moment magnitude 4.5 can trigger liquefaction in extremely susceptible soil deposits. However, for soil profiles that are suitable for building structures, the minimum earthquake magnitude for the triggering of liquefaction is about 5. We therefore propose that in liquefaction hazard assessments of building sites, magnitude 5.0 be adopted as the minimum earthquake size considered, while magnitudes as low as 4.5 may be appropriate for some other types of infrastructure. [DOI: 10.1193/032218EQS064M]

INTRODUCTION

Although an almost negligible contributor to earthquake fatalities, liquefaction triggering is an important threat to the built environment and, in particular, to infrastructure and lifelines (e.g., [Bird and Bommer 2004](#), [Hakuno 2004](#)). The question of the smallest earthquake magnitude that can lead to liquefaction triggering in saturated sand deposits arises because of two factors. One is the growing concerns regarding induced earthquakes resulting from human activities such as hydrocarbon production, hydraulic fracturing, and wastewater injection ([Davies et al. 2013](#), [Mitchell and Green 2017](#)). Because induced earthquakes often occur in regions of low tectonic seismicity and are viewed as an imposed rather than natural hazard, attention to such events is often focused on magnitudes (in the range of 3–5) that are smaller than those generally given attention in conventional earthquake engineering. For small-to-moderate magnitude induced and triggered earthquakes, ground shaking will clearly be of concern both as a source of disturbance to the exposed population as well as a potential cause of damage to buildings that may have been constructed without consideration of seismic loading. A comprehensive induced seismic risk assessment might also consider other earthquake hazards, although some of these, such as tsunami and probably surface rupture, could

^{a)} Department of Civil and Environmental Engineering, Virginia Tech University, Blacksburg, VA 24061; Email: rugreen@vt.edu (R. G.)

^{b)} Department of Civil and Environmental Engineering, Imperial College London, London SW7 2AZ, United Kingdom

be easily screened out. Collateral geotechnical hazards are likely to require quantitative evaluation unless, at least for liquefaction, a clearly established minimum magnitude ($M_{\min}$) threshold existed, in which case, it would be possible to discard this hazard from risk estimations.

Another motivation for exploring the lower magnitude limit associated with liquefaction triggering is for probabilistic liquefaction hazard analysis (PLHA; e.g., [Kramer and Mayfield 2007](#)), for which a lower limit is required in the same way as for probabilistic seismic hazard analysis (PSHA). More than three decades ago, in the very first issue of this journal, [Atkinson et al. \(1984, p. 112\)](#) presented a simplified approach to PLHA, stating that "...since earthquakes of magnitude less than 5 are not of sufficient duration to cause liquefaction, M_5 is the lowest magnitude which contributes to the probability of liquefaction," although the technical basis for this claim is not presented. [Goda et al. \(2011\)](#) showed that using a lower bound magnitude of 4.5, versus 5.0, does influence the computed return period of liquefaction for sites where the seismic hazard is dominated by lower magnitude events. While [Goda et al. \(2011\)](#) only considered tectonic earthquakes in their study, the finding seemingly applies to both tectonic and induced seismicity. Herein, we aim to explore the issue of what is an appropriate lower bound magnitude for evaluating the risk from liquefaction triggering. We begin with a brief discussion of the concept of $M_{\min}$ as it applies in PSHA and its definition in the framework of PLHA. This is followed by a critical review of field reports of liquefaction caused by small earthquakes, after which we present a simplified parametric study aimed at estimating the smallest magnitudes capable of triggered liquefaction in two idealized soil profiles: one we characterize as being "extremely susceptible" to liquefaction and the other as "very susceptible" to liquefaction. The paper concludes with our interpretation of the field data and parametric study results to propose a lower bound of earthquake magnitude for the assessment of liquefaction hazard to the built environment.

THE CONCEPT OF $M_{\min}$ AND LIQUEFACTION

The concept of the $M_{\min}$ defined for PSHA integrations is a topic of some confusion in the field of engineering seismology, a situation that may have arisen because it is a parameter often viewed through the lens of seismic hazard, whereas, in fact, it is related to seismic risk. [Bommer and Crowley \(2017\)](#) proposed a definition of $M_{\min}$ as the lower limit of integration over earthquake magnitudes such that using a smaller value would not alter the estimated risk to the exposure under consideration. The imposition of an $M_{\min}$ value will, however, generally modify the estimate of the ground shaking hazard, particularly for spectral accelerations at shorter oscillator periods and at higher annual frequencies of exceedance. The point is that the hazard contributions from smaller magnitude events are associated with ground motions insufficiently energetic to cause damage to the structures for which the hazard is being estimated, and therefore the reduction of the hazard by removal of these events has no impact on the estimated risk (apart from rendering its calculation more efficient). Following from this definition, it is immediately clear that $M_{\min}$ may vary with different applications of PSHA results; a value of M_5 may be appropriate for defining the seismic design loads for a nuclear power plant, whereas a smaller value may be more fitting for the assessment of seismic risk because of induced earthquakes in a region of unreinforced masonry dwellings.

The definition of $M_{\min}$ in PSHA can be directly translated to PLHA by analogy if the “risk” is now considered to be the severity or damage potential of soil liquefaction rather than structural damage, which would be a common measure in seismic risk estimation. The role of fragility functions in seismic risk analysis is now replaced by the susceptibility of the soil profiles to liquefaction. For the purpose of addressing the question posed in the title of this paper, the “fragility” (liquefaction susceptibility) of a site needs to be defined. As is discussed in the following sections of the paper, the question can be posed in two ways, the first being what is the smallest magnitude of earthquake that can trigger liquefaction in any soil profile? A second, and more pertinent, question from an engineering perspective is what is the smallest magnitude of earthquake that can trigger liquefaction in a soil profile that is sufficiently competent to support infrastructure? The answer to the latter question is of greater importance.

Before closing this brief discussion of $M_{\min}$ in the context of liquefaction hazard analysis, one might ask whether it would not be more appropriate to define the minimum level of ground shaking that might trigger liquefaction. In the context of PSHA, the question is very pertinent and is the reason why alternative approaches to the use of sharp cutoff on magnitudes, regardless of source-to-site distance and other considerations, are employed [e.g., screening criteria based on levels of Cumulative Absolute Velocity (CAV); [Electrical Power Research Institute 2006](#)]. However, for the case of liquefaction triggering, this is controlled by both the amplitude (most usually PGA) and the duration (or number of cycles of motion) simultaneously. Therefore, for earthquakes occurring at short distances from the site of interest, the magnitude is potentially a good indicator of the capacity of the motion to trigger liquefaction because both PGA and duration depend on magnitude and display inverse dependence on distance ([Lasley et al. 2017](#)). Moreover, residuals of PGA and duration with respect to median predictions from ground-motion prediction equations (GMPEs) are found to be negatively correlated ([Bradley 2011](#)). Studies that have focused on thresholds of PGA for liquefaction triggering have normalized the peak acceleration values to a common reference magnitude precisely to account for the influence of duration ([Santucci de Magistris et al. 2013](#)). Absolute minimum PGA thresholds for liquefaction could be defined on the basis of lower amplitudes of motion being incapable of inducing sufficient strain to generate excess pore water pressure in the soil, which is requisite for liquefaction triggering ([Dobry et al. 1982](#), [Rodriguez-Arriaga and Green 2018](#)), but to use such an approach for screening of liquefaction hazard would require estimation of PGA values, with the attendant difficulties of extrapolating empirical GMPEs to smaller magnitudes (e.g., [Bommer et al. 2007](#)). For PLHA, there may be benefits of defining a lower bound for hazard contributions based on a ground-motion parameter or vector of parameters, but CAV may not be the most suitable metric for this purpose; indeed, its relevance to structural damage has been questioned for some building types ([Campbell and Bozorgnia 2012](#)). As a starting point, however, $M_{\min}$ is potentially an effective lower bound for PLHA, and it is clearly a convenient criterion for determining whether liquefaction hazard requires consideration when assessing the impact of induced earthquakes.

Regarding established threshold ground motion and magnitude criteria below which liquefaction evaluations are not required, it is worth briefly summarizing some of the criteria specified in United States design codes *ASCE 7-16* [[American Society of Civil Engineering \(ASCE\) 2017](#)] and American Association of State Highway and Transportation Officials

(AASHTO 2014). *ASCE 7-16* does not require liquefaction, or other potential geologic and seismic hazards, to be evaluated for Seismic Design Categories (SDC) A and B structures, in which SDC is a function of both the design ground motions and the Risk Category of the structure. In general, for Risk Category II structures, which encompasses “typical” structures (i.e., nonessential facilities that neither pose a “low” nor a “substantial” risk to human life in the event of their failure), SDC A and B classification is based on the amplitudes of the spectral accelerations of the design ground motions for both 0.2-s and 1.0-s oscillator periods (i.e., S_{DS} and S_{D1} , respectively). These dual criteria inherently encompass both the PGA and duration of the design motions that influence the triggering of liquefaction because, in general, S_{DS} strongly correlates with PGA and S_{D1} strongly correlates with magnitude, which, in turn, strongly correlates with ground-motion duration. This is illustrated in Figure 1, which shows PGA and the spectral accelerations for 0.2-s and 1.0-s oscillator periods (S_s and S_1 , respectively) as a function of earthquake magnitude for motions recorded by the Guerrero accelerograph array in Mexico in 1985 and 1986. All the stations were on hard rock, and all the events have epicenters about 25 km from the station (Anderson and Quass 1988). As may be observed from this figure, both PGA and S_s have similar correlations with magnitude (as indicated by similarity in the slopes of lines formed by the data points), and their correlation with magnitude is not as strong as the correlation between S_1 and magnitude. Similar to *ASCE 7-16*, AASHTO (2014) does not require liquefaction evaluations to be performed for highway bridge sites that are categorized as SDC A or B (Marsh et al. 2014). However,

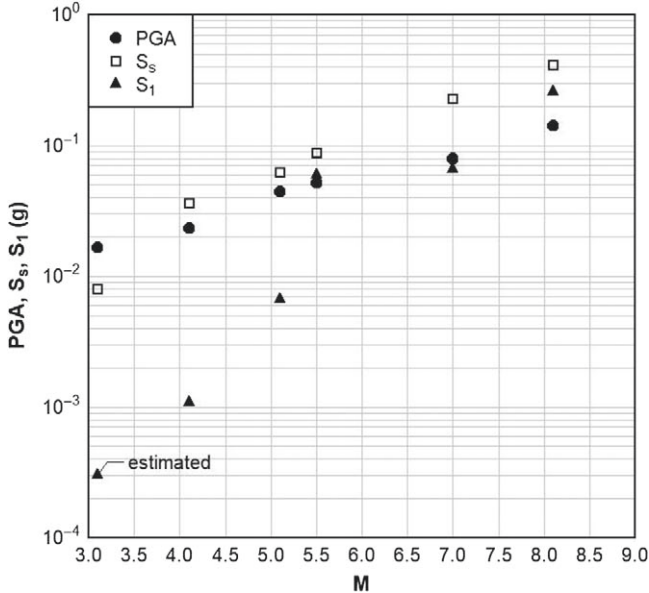


Figure 1. PGA and spectral accelerations for 0.2-s and 1.0-s period oscillators versus earthquake magnitude for motions recorded by the Guerrero accelerograph array in Mexico in 1985 and 1986. All the stations were on hard rock and all the events have epicenters about 25 km from the station.

the SDC is solely based on S_{DI} in [AASHTO \(2014\)](#), which, again, has a relatively strong correlation with earthquake magnitude and ground-motion duration.

Both the *ASCE 7-16* and [AASHTO \(2014\)](#) criteria are readily implementable because seismic hazard maps accompany the codes, and liquefaction evaluations are performed in a pseudoprobabilistic manner rather than in a probabilistic manner (i.e., liquefaction is evaluated for a ground motion having a given return period rather than the return period of liquefaction being evaluated). Also, it is noteworthy that the seismic hazard maps that accompany both *ASCE 7-16* and [AASHTO \(2014\)](#) are based on PSHA that uses a lower bound magnitude of 5.0.

FIELD OBSERVATIONS OF LIQUEFACTION IN SMALL EARTHQUAKES

Assessment of field reports of liquefaction triggering by small to moderate earthquakes needed to infer lower bound magnitude thresholds requires evaluation of three factors. One of these, as indicated above, is the susceptibility of the soil deposits reported to have liquefied. The other two factors are the reliability of the earthquake source parameters (particularly the magnitude value) and the confidence that can be placed in the observed effects being both genuinely associated with liquefaction and unambiguously the result of the earthquake in question. Below, we briefly review select case histories and simply make reference to others found in literature but not in chronological order for reasons that will be apparent.

Before reviewing individual case histories of liquefaction in small earthquakes, we note that in databases compiled for the derivation of models used in various types of liquefaction-related hazard assessments, we find no case of events smaller than magnitude 4.83. There is a single case of **M** 5, for example, in the database of [Ambraseys \(1988\)](#), with the next smallest being **M** 5.2. In the database of Japanese liquefaction cases of [Kuribayashi and Tatsuoka \(1975\)](#) and that for Greek cases by [Papadopoulos and Lefkopoulos \(1993\)](#), all events are larger than magnitude 5. Similarly, all cases of lateral spreading reported by [Keefer \(1984\)](#) and [Rodriguez et al. \(1999\)](#) are larger than magnitude 5. In the Italian database used by [Galli \(2000, p. 185\)](#) to define a magnitude-distant envelope for liquefaction, the smallest reported event has an equivalent magnitude, assumed to be moment magnitude ([Gasperini et al. 1999](#)), of 4.83; the event occurred in Monte Amiata on 10 September 1919, for which the only information provided regarding evidence of liquefaction is that there was “water emission.” Based on these compendia of case histories, observations of liquefaction effects in events of less than **M** 5 would seem to be exceptional.

TRIGGERED OR INDUCED EARTHQUAKES

The 3 September 2016 Pawnee, OK, earthquake, likely triggered by wastewater injection, had a moment magnitude **M** 5.8 and caused small sand boils and cracks because of lateral spreading at three locations along the Arkansas River ([Clayton et al. 2016](#), [Kolawole et al. 2017](#)). The magnitude is well constrained, and there is clear photographic evidence of the liquefaction effects that manifest in the clearly susceptible environment of a river bank. There is, in fact, nothing remarkable about this particular case history, but it is included in this overview because it is the only confirmed report of liquefaction caused by an induced or triggered earthquake that we are aware of; as discussed below, there are unconfirmed reports of liquefaction occurring in three other induced or triggered earthquakes. This is significant

because inferences about $M_{\min}$ thresholds for liquefaction made from field observations are inevitably subject to the claim that absence of evidence cannot be taken as evidence of absence. However, counter to this view is the fact that induced and triggered seismic events have tended to attract great scrutiny in recent years, and yet no triggered or induced events smaller than the Pawnee earthquake have confirmed reports of liquefaction.

The three triggered or induced earthquakes with unconfirmed reports of liquefaction are the **M** 5.3–5.4 2011 Trinidad, CO, earthquake; the **M** 5.1 2016 Fairview, OK, earthquake; and the **M** 5.4 1986 Newcastle, Australia, earthquake. Trinidad, CO, is located in the Raton Basin of southern Colorado and northern New Mexico, which was an area of low seismicity prior to 2001. [Rubinstein et al. \(2014\)](#) show that the change in seismicity of the region statistically correlates to deep wastewater injection activities, with the largest event occurring in the region being the 22 August 2011, **M** 5.3–5.4 event. The unconfirmed report of liquefaction during this event is mentioned in the post-earthquake Preliminary Damage Report by the Colorado Geological Survey ([Morgan and Morgan 2011](#)). No evidence of liquefaction *per se* is presented in the damage report (e.g., no evidence of liquefaction ejecta or lateral spreading cracks), but [Morgan and Morgan \(2011\)](#) question whether liquefaction was the root cause of an anecdotal description of damage to a house, where the owner described the ground rotating and the floor heaving and down-dropping.

Fairview, OK, is about 150-km west of Pawnee, OK, and as with Pawnee, is an active area of wastewater injection, resulting from gas and oil production in the region. On 13 February 2016, the **M** 5.1 Fairview earthquake occurred and cause limited damage to unreinforced masonry structures. No evidence of liquefaction (e.g., no evidence of liquefaction ejecta or lateral spreading cracks) or even laymen's phenomenological descriptions of liquefaction were reported in the post-event observations or news coverage. However, [Barnhart et al. \(2018\)](#) used remote sensing geodetic observations from interferometric synthetic aperture radar (InSAR) to quantify the surface deformation in the impacted region. They identified an ~16 km stretch of a displacement transient along the Cimarron River, directly above the source region, and postulate that this is a result of liquefaction. It is possible that liquefaction is responsible for the InSAR surface deformation signal, but given the extent of the purported liquefaction (i.e., ~16 km stretch of land), it is difficult to conceive why no ground observations of liquefaction were reported.

There is some debate about whether the **M** 5.4 1986 Newcastle, Australia, earthquake was a triggered or induced earthquake, resulting from dewatering of deep coal mines in the region ([Klose 2007](#)), or whether it was a natural tectonic event ([Quinn et al. 2008](#)). Nevertheless, the event is included in this section for completeness. In addition to the uncertainty about the nature of the earthquake, there is additional uncertainty regarding whether liquefaction was actually triggered during this event. [Brunsdon \(1990, p. 106\)](#) states, "No observations of liquefaction of sands were reported, although it is considered that liquefaction may have occurred in certain areas had the earthquake been of longer duration." Similarly, [McCue et al. \(1990, p. 563\)](#) state, "There was no obvious subsidence or extensive ground cracks, despite the added instability from shallow mining, and no liquefaction (sand boils or mud volcanoes)." However, [Harkness and Hassanain \(2002\)](#)

and Melchers (1990) attribute observed subsidence of the ground surface and differential settlement of buildings to liquefaction in the subsurface. In the case described by Harkness and Hassanain (2002), differential settlement was observed in houses built on landfill over a former swamp; no information is given regarding the characteristics of the landfill or swamp soils. Accordingly, cyclic softening of clayey material, for example, could be the cause for the differential settlement of the building rather than liquefaction. Melchers (1990) mentions a couple locations where liquefaction might have resulted in settlement of the ground surface.

ROERMOND, THE NETHERLANDS (1992)

This earthquake in the south of the Netherlands on the border with Germany triggered liquefaction effects similar to those observed in the Pawnee earthquake, for which there is clear photographic evidence. Grain size gradation curves obtained from laboratory tests on samples from one of the liquefied sites indicated a poorly graded sand that would be highly susceptible to liquefaction (Nieuwenhuis 1994). The earthquake was assigned a moment magnitude of M 5.4 by the U.S. Geological Survey.

OLANCHA, CALIFORNIA (2009)

There were observations of extensive liquefaction of susceptible sand deposits in an area where the water table was close to the ground surface following this earthquake of magnitude M 5.2. Holzer et al. (2010, p. 184) published a paper presenting these observations as noteworthy precisely because “liquefaction...is common in earthquakes with moment magnitudes (M) greater than 6 and frequently causes damage, but it is rarely associated with earthquakes of $M \leq 5.2$.” Holzer et al. (2010) attribute the occurrence of liquefaction in this earthquake to the susceptibility of the soils (an active alluvial fan depositing coarser grains over fine-grained lake deposits) rather than exceptional ground motions.

LOMA PRIETA AFTERSHOCK, CALIFORNIA (1991)

Holzer et al. (2010) note the report by Sims and Gavin (1995) of liquefaction caused by a magnitude M 4.6 aftershock of the October 1991 Loma Prieta earthquake. Clear evidence of liquefaction was documented for this earthquake, which is significant because it establishes that the lower bound magnitude is at least as small as 4.6. However, it is noteworthy that the liquefaction was observed to occur in the extremely susceptible deposits of the dry Soda Lake, which was formerly a man-made settling basin. Moreover, Sims and Gavin (1995, p. 51) noted that the “sandblows developed during the March 1991 aftershock erupted only through pre-existing vents.” As a result, it is very possible that surficial evidence of liquefaction having triggered at depth would not have manifested if liquefaction dikes from the source stratum to the ground surface had not formed at the site during the M 6.9 Loma Prieta main shock.

RANDOLPH, UTAH (2010)

This case history is also noted by Holzer et al. (2010), and it supports the lower bound implied by the previous case with the moment magnitude of this event estimated at 4.5–4.6.

Sand boils were observed on the banks of a river (Figure 2) that appears to be almost swampy ground. DuRoss (2011, p. 7) reported that “We attribute the occurrence of liquefaction to highly susceptible sediments very near the epicenter.”



Figure 2. Liquefaction effects observed following the M 4.6 Randolph earthquake in Utah (Pankow et al. 2015).

CHRISTCHURCH, ZEALAND (2010–2011)

Widespread liquefaction was triggered throughout Christchurch and surrounding areas during the 2010–2011 Canterbury, New Zealand, earthquake sequence (CES), with the largest event in the sequence being the 2010 M 7.1 Darfield earthquake (e.g., Cubrinovski and Green 2010, Cubrinovski et al. 2011, Green et al. 2011, Green et al. 2014, Wood et al. 2017). As many as ten distinct episodes of liquefaction triggering occurred in regions of Christchurch during the CES (Quigley et al. 2013). These observations are significant because on-site inspections were made following many of the felt episodes of shaking, and hence this is a case for which there is actual evidence for absence, at least of any effects observable at the surface. Figure 3 shows the key findings from Quigley et al. (2013), from which it can be appreciated that the smallest event to have triggered liquefaction at the site had a moment magnitude of M 5.0. The squares in Figure 3, which correspond to events for which no surface ejecta were observed, range from M 4.5 to 5.4.

There is limited documented evidence of liquefaction being triggered during the M 4.8, 19 October 2010 aftershock that occurred approximately 5 km SW of Christchurch in the suburb of Haswell (Tonkin & Taylor 2013). Marginal liquefaction is reported to have triggered during this event in Haswell and in the suburb of Hoon Hay, about 4 km NE of the epicenter for the aftershock. This area had severely liquefied 6 weeks prior during the 4 September 2010 M 7.1 Darfield earthquake. As a result, similar to the Loma Prieta aftershock discussed above, it is very possible that surficial evidence of liquefaction having triggered at depth would not have manifested if liquefaction dikes from the source stratum to the ground surface had not formed at the site during the M 7.1 main shock.

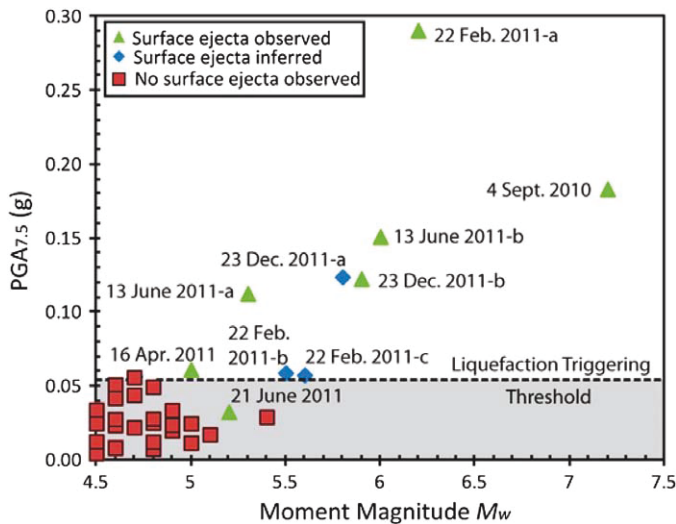


Figure 3. Observations of liquefaction as a function of magnitude and magnitude-normalized PGA ($PGA_{7.5}$) for a site in Avonside, an eastern suburb of Christchurch, New Zealand, during the 2010–2011 CES (Quigley et al. 2013).

The 2010–2011 Christchurch liquefaction episodes are an important series of case histories because they are instances of liquefaction being observed in the vicinity of buildings (i.e., low-rise residential structures), implying that the ground was essentially competent under static conditions, albeit sites that are very susceptible to liquefaction. There have been observations of liquefaction caused by smaller events on extremely susceptible ground, on which it is hard to imagine that it would have been possible to found a building structure because of bearing capacity, settlement, and drainage issues.

AU SABLE FORKS, NEW YORK (2002)

This tectonic earthquake occurred in the northeast part of New York State on 20 April 2002 and was assigned a Lg-wave magnitude (m_{bLg}) of 5.3 by the U.S. Geological Survey and a M 5.0 by Seeber et al. (2002). The earthquake triggered liquefaction in a very loose silty fine sand fill deposit at the toe of a road embankment, likely placed in 1953, resulting in a localized slide in the embankment (Figure 4; Gingery 2003, Pierre and Lamontagne 2004). Analysis of the case history performed by Gingery (2003) shows that the large initial static shear stresses imposed on the very loose silty fine sand fill deposit by the embankment were key to liquefaction being triggered (i.e., liquefaction would likely not have been triggered in the absence of these large initial static shear stresses). This is an important case history because it highlights the potential for the stresses imposed by the infrastructure to influence liquefaction triggering, which may, in turn, detrimentally impact the infrastructure.

FALCON STATE, VENEZUELA (1989)

Audemard and de Santis (1991) report sand boils occurring in the delta of the Tocuyo River in Venezuela as a result of an earthquake swarm in 1989. The coastal sand deposits where the sand boils were observed were clearly susceptible to liquefaction and in all cases seemed to have found their way to surface through crab burrows and existing fractures. This case history is noteworthy, however, as an illustration of the importance of establishing reliable source parameters for the earthquakes and clear association of the liquefaction phenomena with the seismic event.

Audemard and de Santis (1991) identify two earthquakes with body-wave magnitudes (m_b) of 5.7 and 5.0, both more than 15 km offshore, as being the cause of the liquefaction. The two earthquakes occurred 6 days apart, but it is unclear from the paper if the field studies were conducted in such a way as to separate and distinguish their effects. The source parameters for the earthquakes were obtained from the national seismological service in Venezuela. The catalog of the International Seismological Centre lists three earthquakes on the same dates and in the same area. The first two (m_b 4.7 and m_b 4.6, respectively) occurred on April 30 at least 30 km from the coastline; the third occurred on May 4, much closer to the shore, and is assigned m_b 5.4 and surface-wave magnitude (M_s) of 5.2. Notwithstanding that these locations may also be offset from the true epicenters, it seems reasonable to conclude that the modest manifestations of liquefaction in this highly susceptible environment were the result of the final earthquake of magnitude greater than 5.

BARROW-IN-FURNESS, UNITED KINGDOM (1865)

The previous case history highlights an instance of uncertainty regarding the source characteristics of the earthquake to which observations of liquefaction have been attributed. In the case of the liquefaction effects that were claimed to have occurred near the coastal village of Barrow-in-Furness in NW England in 1865, there is doubt regarding both the earthquake source parameters and the actual liquefaction effects as well. This case history warrants careful consideration because if the claims of Musson (1998, p. 743) were verified, this is a game changer; an earthquake with a magnitude “perhaps most likely between $2\frac{1}{2}$ and $3\frac{1}{2}$ ” triggered the following liquefaction phenomena according to a contemporary account: “We saw at a distance from us, a great mass of sand, water and stone thrown up into the air higher than a man’s head....when we got to the place there were two or three holes in the sand, large enough to bury a horse and cart, and in several places near them, the sand was so soft and puddly that they would have mired any one if he had gone on to them.” Musson (1998, p. 739) also reports structural damage caused by the shaking consistent with Modified Mercalli Intensity (MMI) of VIII. A very shallow focal depth is offered as an explanation for such intense motions from such a small earthquake, but very superficial earthquakes would also be expected to have rather low stress drops.

The reported sand boils and volcanoes occurred on tidal flats that are clearly extremely susceptible to liquefaction. Musson (1998, p. 740) states that “further evidence of the easily liquefiable nature of the sands is provided by the fact that Morecombe Bay [10 km to NE] is notorious for quicksand just in normal conditions.” However, regardless of how susceptible the sands may have been to liquefaction, it is still difficult to reconcile the small magnitude assigned to the earthquake with the very dramatic liquefaction effects with ejecta being projected more than 2 m into the air. Musson (1998) notes a report attributing the reported effects to the escape of a large body of gas but discounts this alternative explanation. One reason given to discredit the gas explanation is that the observers would have reported smelling gas, despite the fact that they observed the rising material from some distance on a presumably wind-swept tidal plain and the fact that naturally occurring methane is odorless. Another reason put forward by Musson (1998, p. 739) to discount an escape of gas as the explanation is “the description of quicksand-like effects is more in line with classical liquefaction than with a gas burst;” to us, sand, rocks, and water being thrown into the air do not seem consistent with quicksand and are much more suggestive of an explosive phenomenon. How a micro- to small-magnitude earthquake could generate sufficient cycles of motion to trigger severe liquefaction and associated excess pore pressures required to eject rocks 2 m off the ground is hard to explain.

We are unable to state conclusively whether the magnitude assigned to the earthquake is grossly underestimated or if the reported liquefaction effects were actually due to another cause, but we believe that it is easy to establish reasonable doubt with regard to the story related by Musson (1998). Taking the reported magnitude of 2.5–3.5 at face value, globally, there are a little more than 400,000 earthquakes of this size annually; therefore, in the 150 years since the Barrow-in-Furness earthquakes, there have been more than 60 million events of similar size. Even discounting all offshore and subcrustal earthquakes and all events occurring in remote areas away from human habitation, the complete lack of any comparable observations from such small events would at the very

least suggest that what is reported to have happened in nineteenth-century England was an event with a probability of less than 10^7 . More likely, it suggests that the claim of liquefaction triggering by an earthquakes of $M \sim 3$ is unfounded and, hence this case history can be dismissed from inferences regarding lower bounds of magnitude for liquefaction triggering.

CHRISTCHURCH, NEW ZEALAND (1869 AND 1870)

Two significant earthquakes that impacted Christchurch, New Zealand, between the start of organized European settlement in 1850 and the September 2010 M 7.1 Darfield earthquake occurred in 1869 and 1870 (Downes and Yetton 2012). The macroseismic epicenter of the 1869 Christchurch earthquake is estimated to be approximately 3.5 km SW of the center of the city's most densely populated region at the time, which is currently the city's Central Business District (CBD). Damage to chimneys, unreinforced masonry structures, and internal contents of both residences and businesses were reported in the CBD and nearby suburbs, with the damage intensity in the CBD being assessed as MMI VII. Based on an MMI isoseismal map for the event and New Zealand-specific GMPEs (Dowrick and Rhoades 1998), Downes and Yetton (2012) estimate the event had a shallow focal depth and a moment magnitude of 4.7–4.9. No liquefaction or ground damage was reported for this event despite several regions that experienced the most intense shaking and structural damage having deposits that are very susceptible to liquefaction (e.g., Avonside, Figure 3).

The macroseismic epicenter of the 1870 earthquake that impacted Christchurch is estimated to be under Lake Ellesmere, which is approximately 25 km S-SW of the CBD and is a former mouth of the Waimakariri River, which currently empties into Pegasus Bay north of Christchurch. Lake Ellesmere is shallow and is better described as a lagoon or estuary than a lake. Shaking from this event was felt over much of the central portion of the South Island of New Zealand, and the estimated magnitude of this event is M 5.6–5.8 (Downes and Yetton 2012). Damage in the CBD and nearby suburbs from this event was similar to but slightly less than (MMI VI vs. MMI VII) that experienced during the 1869 Christchurch earthquake. No liquefaction was reported *per se*, but muddying of a creek near Lake Ellesmere was reported. This may indicate that liquefaction occurred in the creek bed, which was pervasive in the Avon and Heathcote River beds and in the Avon-Heathcote Estuary during the 2010–2011 CES (e.g., Figure 5). The Avon-Heathcote Estuary is also a former mouth of the Waimakariri River and, thus, likely has similar deposits as Lake Ellesmere (Green et al. 2018c); these deposits may also be similar to the tidal flats that are purported to have severely liquefied during the 1865 Barrow-in-Furness earthquake (Musson 1998).

Although there is some uncertainty about the earthquake source parameters and liquefaction response of the deposits for these two events, clearly deposits susceptible to liquefaction were subjected to shaking during these events (e.g., river and lake bed deposits and Avonside). The significance of these events is that the observed liquefaction responses are in direct accord with those made during the 2010–2011 CES and are completely independent (i.e., $M \sim 5.0$ is the threshold for triggering liquefaction in all but extremely susceptible soil deposits).



Figure 4. Road embankment failure during the **M 5.0** Au Sable Forks earthquake in New York. The slide is attributed to liquefaction occurring in the fill material at the toe of the embankment. (Gingery 2003).



Figure 5. Severe surficial liquefaction manifestations in the Avon-Heathcote Estuary that formed during the 2011 **M 6.2** Christchurch earthquake, where the PGA at this site estimated to be greater than 0.6 g (photo courtesy of Greg DePascale, February 22, 2011).

EPISODES OF LIQUEFACTION DURING OTHER SMALLER MAGNITUDE EVENTS

The following is a listing of credible episodes of liquefaction occurring in other small magnitude events worldwide: **M** 4.8, 15 July 1996, Epagny-Annecy, France (Dufumier 2002, Dominique et al. 2008); **M** 5.0–5.1, 24 November 2004, Garda Lake, Salo, Italy (Michetti et al. 2005); **M** 5.2, 20 March 1992, Milos, Greece (Papadopoulos 1993); local magnitude (M_L) 5.3, 15 July 1903, Warrnambool, Australia (The Argus 1903, The Register 1903); **M** 5.4, 26 March 1993, Pyrgos, Greece (Koukouvelas et al. 1996, Papanikolaou et al. 2009); and **M** 5.5, 3 November 2010, Vitanovac, Kraljevo, Serbia (Knezevic Antonijevic et al. 2013). While each of these events undoubtedly have unique aspects of value to liquefaction research, a more detailed coverage of each herein is not warranted because they only confirm observations about the threshold magnitudes for liquefaction triggering identified by the other cases already presented.

A SIMPLE PARAMETRIC STUDY

In order to explore the lower limit on earthquake magnitude for triggering liquefaction, a simple parametric study is performed using two idealized profiles, one that we refer to as being “very susceptible” to liquefaction and the other as being “extremely susceptible” to liquefaction. As shown subsequently, the distinction between the two profiles manifests in their suitability for building structures as well as their resistance to liquefaction triggering. Both idealized profiles are composed of thick deposits of loose, clean, fine sand with shallow ground water tables. In the engineering analyses, we model the profile that we refer to as being extremely susceptible to liquefaction as having the ground water table at the ground surface (i.e., $z_{\text{gwt}} = 0$ m) and having a constant normalized cone penetration test (CPT) tip resistance (q_{c1Ncs}) equal to 84 atm down to a depth of 20 m. Using the correlation proposed by Robertson (2015), the sand in this deposit has a relative density of approximately 20%, which is very loose and about the loosest state found in nature (e.g., in very young estuary deposits). The profile that is very susceptible to liquefaction is identical to the one that is extremely susceptible to liquefaction, except that it has a 1-m-thick dense crust (i.e., $q_{c1Ncs} = 180$ atm) and the depth to the ground water table corresponds to the base of the dense crust (i.e., $z_{\text{gwt}} = 1$ m), which is by all accounts still very shallow.

The parametric study performed using the two profiles entailed predicting the severity of surficial liquefaction manifestations using the Green et al. (2018a, 2018b; Gea18) CPT-based simplified liquefaction evaluation procedures while operating within the Liquefaction Potential Index (LPI; Iwasaki et al. 1978) and Ishihara-inspired LPI (LPI_{ish} ; Maurer et al. 2015) liquefaction damage potential frameworks. One of the Gea18 procedures is for shallow crustal tectonic events in active seismic regions ($\text{Gea18}_{\text{tecton}}$), and the other is for induced seismicity in the Groningen region of the Netherlands ($\text{Gea18}_{\text{Gron}}$). Two earthquake magnitudes were considered, **M** 4.5 and **M** 5.0, and a PGA of 0.15 g is assumed, which is reasonable but likely has an epsilon greater than zero, for the epicentral region of shallow earthquakes in this magnitude range, whether for induced or tectonic events.

Figure 6 shows the results of the liquefaction parametric study, and as shown, the computed LPI and LPI_{ish} values at the ground surface are only greater than zero for **M** 4.5 and $z_{\text{gwt}} = 0$ m (i.e., extremely susceptible profile). For these analyses, it is assumed that an LPI and LPI_{ish} value of 5 is the threshold that separates no-to-minor and moderate surficial

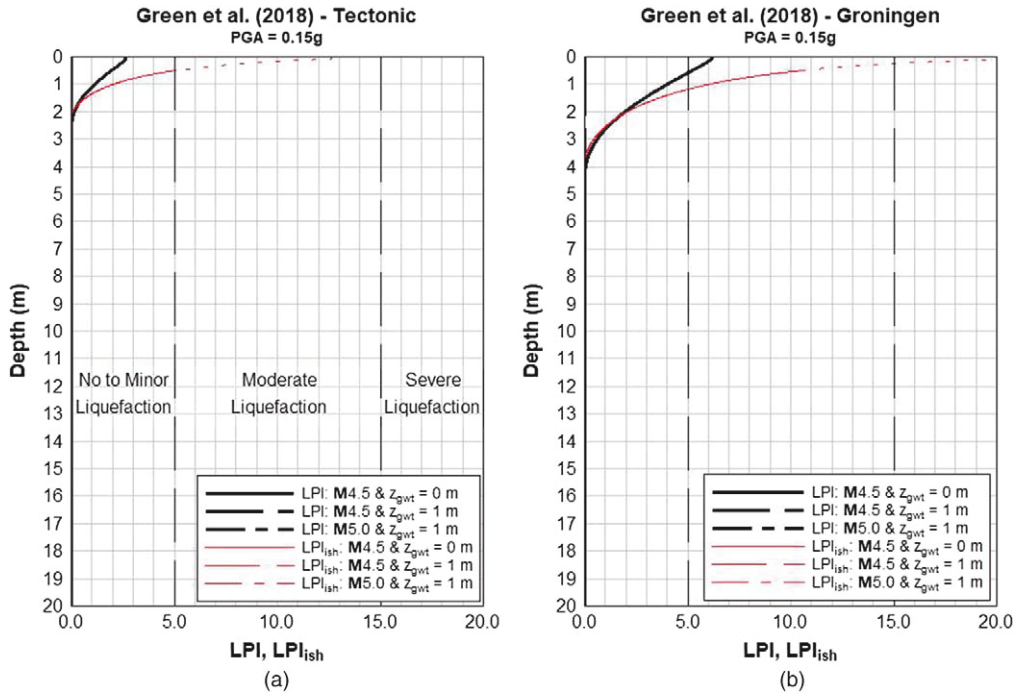


Figure 6. Results from the liquefaction parametric study on “very susceptible” (i.e., $q_{c1Ncs} = 84$ atm and $z_{gwt} = 1$ m) and “extremely susceptible” (i.e., $q_{c1Ncs} = 84$ atm and $z_{gwt} = 0$ m) profiles. Computed LPI and LPI_{ish} profiles using the Gea18 CPT-based simplified procedure for (a) shallow crustal tectonic events in active seismic regions and (b) shallow crustal induced events in the Groningen region of the Netherlands. Note that only the M4.5 $z_{gwt} = 0$ m scenarios result in non-zero LPI and LPI_{ish} values.

liquefaction manifestations, and an LPI and LPI_{ish} value of 15 is the threshold that separates moderate and severe surficial liquefaction manifestations (Maurer et al. 2014, Maurer et al. 2015). Based on these thresholds, the Gea18_{tecon} procedure operating within the LPI and LPI_{ish} frameworks predicts no-to-minor (LPI) to moderate (LPI_{ish}) surficial liquefaction manifestations for the scenario M 4.5 and $z_{gwt} = 0$ m. Although not shown in Figure 6, similar results were obtained using the Boulanger and Idriss (2014; BI14) CPT-based simplified liquefaction evaluation procedure. The Gea18_{Gron} procedure predicts moderate (LPI) to severe (LPI_{ish}) surficial liquefaction manifestations for this scenario. To the authors knowledge, the Gea18_{Gron} is the only liquefaction evaluation procedure that was explicitly developed to evaluate liquefaction potential because of induced seismicity; however, its applicability for use for evaluating liquefaction potential caused by induced seismicity outside of Groningen is unknown. Note that the dotted portion of the LPI_{ish} curves at shallow depths in Figure 6 is because the framework was never calibrated for $z_{gwt} = 0$ m conditions, and the computed values above 0.5 m for this condition is an extrapolation of the procedure beyond its recommended range of use.

Although the severity of the predicted surficial liquefaction manifestation varies depending on which simplified procedure and liquefaction damage potential framework are used, the trends are consistent. Namely, surficial liquefaction manifestations are only predicted for an **M** 4.5 event for the profile that is extremely susceptible to liquefaction (i.e., $z_{\text{gwt}} = 0$ m), and earthquakes having magnitudes 5.3 and 5.8 (assuming $\text{PGA} = 0.15$ g) or greater are required for surficial liquefaction manifestations to be predicted for the profile that is very susceptible to liquefaction using the $\text{Gea18}_{\text{Gron}}$ and $\text{Gea18}_{\text{tecton}}$ procedures, respectively. This finding is consistent with [AASHTO \(2014\)](#), which justifies not requiring liquefaction evaluations to be performed for SDC A and B highway bridge sites because “For Seismic Design Categories A and B, the potential for liquefaction is generally low, as peak ground accelerations are likely to be less than 0.14g and earthquake magnitudes are likely to be less than 6.0.” ([Marsh et al. 2014](#), pp. 3–4).

The distinction between the profiles that are “very” versus “extremely” susceptible to liquefaction are put into context by their suitability for building structures. Toward this end, the settlement and factor of safety against bearing capacity failure (FS_{bc}) for a one-story conventional light-framed building (e.g., wood-framed, ranch style house) are computed for the two profiles. For residential structures, tolerable settlement is generally limited to 0.0254 m (1 in.), and the minimum acceptable FS_{bc} is 3 ([Naval Facilities Engineering Command 1986](#)). Based on the “presumptive” allowable bearing pressures and corresponding minimum footing widths specified in the International Residential Code ([IRC 2007](#)), the design loads imposed on a strip footing from the superstructure of a one-story conventional light-framed building is back-calculated to be approximately 18.7 kN/m (1,300 lb/ft.).

The CPT-based procedures proposed by [Meyerhof \(1974\)](#) and [Meyerhof \(1956\)](#) are used to evaluate settlement and bearing capacity, respectively. Both of these procedures are based on the uncorrected CPT tip resistance (q_c) averaged over a depth equal to the footing width (B) below the base of the footing. Accordingly, the procedure proposed by BI14 is used to back-calculate q_c from the assumed $q_{c1\text{Ncs}}$ values for the two profiles; note that Gea18 adopted the BI14 procedure that relates uncorrected and corrected CPT tip resistances. [Figure 7](#) shows the back-calculated q_c profiles, and as may be observed, there is a slight difference in the q_c values for the two profiles below the depth of the dense crust, which is due to differences in z_{gwt} for the two profiles and its influence on vertical effective stress.

The depth of embedment (i.e., depth to the bottom of the footing) is required to be a minimum of 0.3048 m (1 ft.) below the undisturbed ground surface, and all exterior footings need to be embedded down to the frost line depth ([IRC 2007](#)), which will vary based on regional temperatures. In the contiguous United States, the frost line depth ranges from 0 to 2.54 m (0–100 in.), with about half the land mass of the contiguous United States having a frost line depth of 0.6096 m (24 in.) or less. Accordingly, for the calculations presented herein, the frost line depth is assumed to be 0.6096 m (24 in.). Using this depth of embedment and assuming $B = 0.3048$ (1 ft.), which is standard for one-story conventional light-framed construction in the United States, q_c averaged over a depth B below the base of the footing (i.e., $q_{c\text{ avg}}$), for the profiles that are very and extremely susceptible to liquefaction are 86.1 and 20.6 atm, respectively. Based on these values, the settlement computed using the [Meyerhof \(1974\)](#) procedure is negligible for both profiles [i.e., well below the tolerable limit of 0.0254 m (1 in.)]. However, the FS_{bc} for the very and extremely susceptible profiles

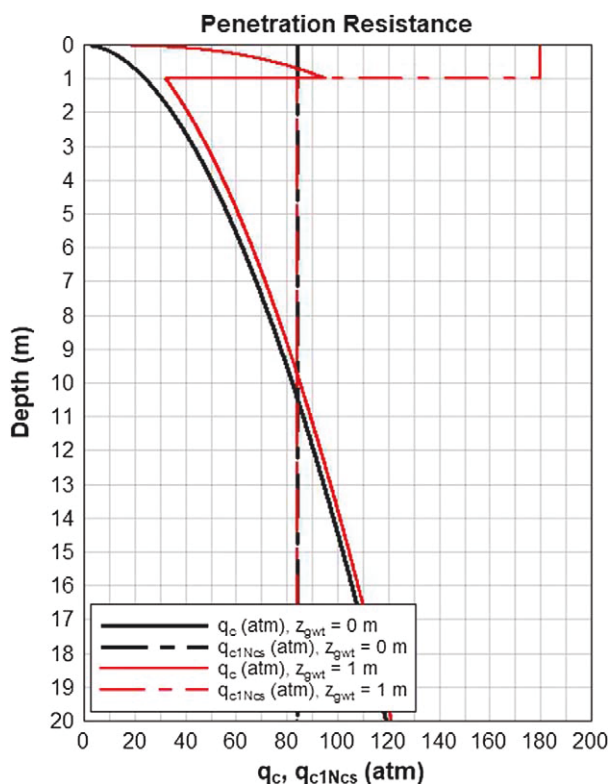


Figure 7. Corrected and uncorrected CPT tip resistances (q_{c1Ncs} and q_c , respectively) for the very susceptible ($z_{gwt} = 1$ m) and extremely susceptible ($z_{gwt} = 0$ m) profiles.

are 10.5 and 2.3, respectively; these FS_{bs} are above and below, respectively, the minimum acceptable FS_{bc} of 3.0. Although the FS_{bc} of 2.3 is not that much below 3.0 and a wider footing width could be used to increase FS_{bc} , this factor of safety is for the in-place structure. If one considers the construction process and that the tire pressure for construction equipment with pneumatic tires is approximately 103.4 kPa (15 psi), on the low end, the upper bound FS_{bc} for the construction equipment under static conditions is 0.2 for the profile that is extremely susceptible to liquefaction. This FS_{bc} is comparable to that of an average-sized human trying to walk across the site shown in Figure 2, the difficulty of which is easily imaginable.

DISCUSSION AND CONCLUSIONS

There is clear and reliable field evidence that surface manifestations of liquefaction triggering have occurred during earthquakes having magnitudes as small as $M \sim 4.5$, but these invariably correspond to exceptional cases of extremely susceptible ground that is not suitable for even the lightest building structures. Evidence for both the occurrence and absence of liquefaction triggering in susceptible ground supports the conclusion that M 5.0 is the lower bound for liquefaction triggering that poses risk to sites suitable for building structures. However, for other infrastructure (e.g., pipelines and legacy levees), magnitudes as low as

4.5 may be appropriate. The conclusions inferred from field observations regarding building structure sites are supported by the results of analyses using engineering models. We also emphasize that the threshold magnitude is a necessary but not sufficient condition; the occurrence of an earthquake of M 5 close to susceptible soil deposits will not necessarily result in liquefaction triggering. One clear consequence of this conclusion is that when assessing the risk to building structures associated with induced seismicity, unless earthquakes in excess of magnitude 5 are expected, liquefaction can be disregarded as a hazard. The other logical consequence of our findings is that in PLHA for building structure sites, earthquakes of magnitude smaller than M 5 do not need to be considered in the hazard integrations. This applies equally to genuine PLHA and pseudoprobabilistic liquefaction hazard assessment; in the latter, contributions to the PGA hazard from earthquakes smaller than magnitude 5 should be eliminated.

Although the confirmed liquefaction case histories reviewed in this study are almost exclusively natural earthquakes of tectonic origin, we believe that the above findings hold for both natural and induced seismicity. One of our motivations for this conclusion is that while induced earthquakes tend to be of shallower focal depth, epicentral motions may not be markedly different (e.g., [Hough 2014](#)). This has been inferred to be the result of the correlation between stress drop and focal depth, which is increasingly recognized as an important factor that is being incorporated into ground-motion predictions for induced seismicity (e.g., [Novakovic et al. 2018](#)). An additional consideration is that induced earthquakes attract considerable attention and receive much greater scrutiny than tectonic events of similar magnitude; consequently, had a small-magnitude induced earthquake triggered liquefaction, it is quite likely that this would have been recorded and reported. In contrast, the occurrence of liquefaction during small magnitude tectonic events may barely get mention (e.g., M 4.8, 19 October 2010 aftershock in Christchurch; [Tonkin & Taylor 2013](#), p. 8).

Our conclusion regarding the $M_{\min}$ to be considered in PLHA for building structure sites actually confirms and substantiates the lower limit proposed by [Atkinson et al. \(1984\)](#). However, as noted in the *Introduction*, [Goda et al. \(2011\)](#) find non-negligible contributions to liquefaction hazard in Canadian cities, and particularly in Montreal (their figure 6), from earthquakes in the range of magnitude 4.5–5. This apparent disparity with the conclusion drawn herein is likely due to the stress reduction factor (r_d) relationship that [Goda et al. \(2011\)](#) used in conjunction with the small-strain shear-wave velocity (V_S)–based liquefaction evaluation procedure proposed by [Andrus and Stokoe \(2000\)](#). Aside from general shortcomings of V_S -based liquefaction evaluation procedures, [Goda et al. \(2011\)](#) used the r_d relationship proposed by [Liao et al. \(1988\)](#), which is independent of earthquake magnitude. Subsequent r_d relationships proposed by [Idriss \(1999\)](#), [Cetin et al. \(2004\)](#), and [Lasley et al. \(2016\)](#), among others, show that r_d tends to decrease as magnitude decreases (i.e., the soil column responds less rigidly as magnitude decreases). This is mainly due to the decrease in the energy of long period motions in smaller magnitude events, as illustrated by the trend in S_1 as a function of M shown in Figure 1. This implies that the cyclic stresses imposed in a stratum at depth in a soil profile are less demanding as the magnitude of the earthquake decreases, separate from the additional magnitude dependencies of PGA and duration of shaking. Accounting for this phenomenon would likely reconcile the disparity of the influence of events less than M 5 on the computed liquefaction hazard shown in [Goda et al. \(2011\)](#) with that shown herein.

ACKNOWLEDGMENTS

This research was partially funded by Nederlandse Aardolie Maatschappij B.V. (NAM) and National Science Foundation (NSF) Grant Numbers CMMI-1435494, CMMI-1724575, and CMMI-1825189. This support is gratefully acknowledged. Additionally, the motivation for this paper came primarily from discussions related to liquefaction hazard that is due to induced earthquakes in the Groningen gas field in the Netherlands. We thank Peter Stafford and Adrian Rodríguez-Marek as well as all the individuals from NAM, Shell, Deltares, Arup, Fugro, BICL, and the NEN-NPR Liquefaction Task Force for the discussions that both prompted and informed our efforts to respond to the question posed in the title of this paper. Additionally, particular thanks are due to Cecilia Nieves, Sjoerd van Ballegooy, Misko Cubrinovski, Ellen Rathje, and Paolo Zimmaro for bringing a number of case histories to our attention. However, any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the NSF or those who inspired this work.

REFERENCES

- Ambraseys, N. N., 1988. Engineering seismology, *Earthquake Engineering & Structural Dynamics* **17**, 1–105.
- American Association of State Highway and Transportation Officials (AASHTO), 2014. *Guide Specifications for LRFD Seismic Bridge Design*, 2nd edition with 2014 Interim, AASHTO, Washington, DC.
- American Society of Civil Engineering (ASCE), 2017. *ASCE7-16: Minimum Design Loads and Associated Criteria for Buildings and Other Structures*, American Society of Engineers, Reston, VA.
- Anderson, J. G., and Quass, R., 1988. The Mexico earthquake of September 19, 1985 – effect of magnitude on the character of strong ground motion: An example from Guerrero, Mexico strong motion network, *Earthquake Spectra* **4**, 635–646.
- Andrus, R. D., and Stokoe, II, K. H., 2000. Liquefaction resistance of soils from shear wave velocity, *Journal of Geotechnical Geoenvironmental Engineering* **126**, 1015–1025.
- Atkinson, G. M., Finn, W. D. L., and Charlwood, R. G., 1984. Simple computation of liquefaction probability for seismic hazard applications, *Earthquake Spectra* **1**, 107–123.
- Audemard, F. A., and de Santis, F., 1991. Survey of liquefaction structures induced by recent moderate earthquakes, *Bulletin of the International Association of Engineering Geology* **44**, 5–16.
- Barnhart, W. D., Yeck, W. L., and McNamara, D. E., 2018. Induced earthquake and liquefaction hazards in Oklahoma, USA: Constraints from InSAR, *Remote Sensing of Environment* **218**, 1–12.
- Bird, J. F., and Bommer, J. J., 2004. Earthquake losses due to ground failure, *Engineering Geology* **75**, 147–179.
- Bommer, J. J., and Crowley, H., 2017. The purpose and definition of the minimum magnitude limit in PSHA calculations, *Seismological Research Letters* **88**, 1097–1106.
- Bommer, J. J., Stafford, P. J., Alarcón, J. E., and Akkar, S., 2007. The influence of magnitude range on empirical ground-motion prediction, *Bulletin of the Seismological Society of America* **97**, 2152–2170.
- Boulanger, R. W., and Idriss, I. M., 2014. *CPT and SPT Based Liquefaction Triggering Procedures*, Tech. Rep. UCD/CGM-14/01, University of California at Davis, Davis, CA.

- Bradley, B. A., 2011. Correlation of significant duration with amplitude and cumulative intensity measures and its use in ground motion selection, *Journal of Earthquake Engineering* **15**, 809–832.
- Brunsdon, D. R., 1990. The December 28, 1989 Newcastle, Australia earthquake, *Bulletin of the New Zealand National Society for Earthquake Engineering* **23**, 102–120.
- Campbell, K. W., and Bozorgnia, Y., 2012. Cumulative Absolute Velocity (CAV) and seismic intensity based on the PEER-NGA database, *Earthquake Spectra* **28**, 457–485.
- Cetin, K. O., Seed, R. B., Der Kiureghian, A., Tokimatsu, K., Harder, Jr., L. F., Kayen, R. E., and Moss, R. E. S., 2004. Standard Penetration Test-based probabilistic and deterministic assessment of seismic soil liquefaction potential, *Journal of Geotechnical and Geoenvironmental Engineering* **130**, 1314–1340.
- Clayton, P., Zalachoris, G., Rathje, E., Bheemasetti, T., Caballero, S., Yu, X., and Bennett, S., 2016. *The Geotechnical Aspects of the September 3, 2016, M5.8 Pawnee, Oklahoma, Earthquake*, *GEER Report 051*, Geotechnical Extreme Events Reconnaissance Association.
- Cubrinovski, M., and Green, R. A. (eds.), 2010. Geotechnical reconnaissance of the 2010 Darfield (Canterbury) earthquake, *Bulletin of the New Zealand Society for Earthquake Engineering* **43**, 243–320.
- Cubrinovski, M., Bradley, B., Wotherspoon, L., Green, R. A., Bray, J., Wood, C., Pender, M., Allen, J., Bradshaw, A., Rix, G., Taylor, M., Robinson, K., Henderson, D., Giorgini, S., Ma, K., Winkley, A., Zupan, J., O'Rourke, T., DePascale, G., and Wells, D., 2011. Geotechnical aspects of the 22 February 2011 Christchurch earthquake, *Bulletin of the New Zealand Society for Earthquake Engineering* **44**, 205–226.
- Davies, R., Foulger, G., Bindley, A., and Styles, P., 2013. Induced seismicity and hydraulic fracturing for the recovery of hydrocarbons, *Marine & Petroleum Geology* **45**, 171–185.
- Dobry, R., Ladd, R., Yokel, F., Chung, R., and Powell, D., 1982. *Prediction of Pore Water Pressure Buildup and Liquefaction of Sands during Earthquakes by the Cyclic Strain Method*, *NBS Building Science Series 138*, National Bureau of Standards, Washington, DC.
- Dominique, P., Evans, A., Le Brun, B., Nédellec, J. L., Winter, Th., Zornette, N., Mirgon, C., and Imbault, M., 2008. Plan de prévention des risques naturels prévisibles - PPR de la commune d'Epagny - Premier livret: Présentation, Bureau des recherches Géologiques et Minières (BRGM) (in French).
- Downes, G., and Yetton, M., 2012. Pre-2010 historical seismicity near Christchurch, New Zealand: The 1869 Mw 4.7–4.9 Christchurch and 1870 Mw 5.6–5.8 Lake Ellesmere earthquakes, *New Zealand Journal of Geology and Geophysics* **55**, 199–205.
- Dowrick, D. J., and Rhoades, D. A., 1998. Attenuation of Modified Mercalli intensity in New Zealand earthquakes, *Bulletin of the New Zealand National Society for Earthquake Engineering* **32**, 55–89.
- Dufumier, H., 2002. Synthesis of magnitude and focal mechanism computations for the $M \geq 4.5$ earthquakes in France for the period 1995–2000, *Journal of Seismology* **6**, 163–181.
- DuRoss, C., 2011. Liquefaction in the April 15, 2010, M4.5 Randolph earthquake, *Survey Notes* **43**, 7.
- Electrical Power Research Institute (EPRI), 2006. *Program on Technology Innovation: Use of Cumulative Absolute Velocity (CAV) in Determining Effects of Small Magnitude Earthquakes on Seismic Hazard Analyses*, EPRI 1014099, Palo Alto, CA.
- Galli, P., 2000. New empirical relationships between magnitude and distance for liquefaction, *Tectonophysics* **324**, 169–187.

- Gasparini, P., Bernardini, F., Valensise, G., and Boschi, E., 1999. Defining seismogenic sources from historical earthquake felt reports, *Bulletin of the Seismological Society of America* **89**, 84–110.
- Gingery, J. R., 2003. Embankment failure from liquefaction and other damage in the 20 April 2002 Au Sable Forks, NY earthquake, *Proceedings, 12th Pan-American Conference on Soil Mechanics and Geotechnical Engineering*, Cambridge, MA.
- Goda, K., Atkinson, G. M., Hunter, J. A., Crow, H., and Motazedian, D., 2011. Probabilistic liquefaction hazard analysis for four Canadian cities, *Bulletin of the Seismological Society of America* **101**, 190–201.
- Green, R. A., Wood, C., Cox, B., Cubrinovski, M., Wotherspoon, L., Bradley, B., Algie, T., Allen, J., Bradshaw, A., and Rix, G., 2011. Use of DCP and SASW tests to evaluate liquefaction potential: Predictions vs. observations during the recent New Zealand earthquakes, *Seismological Research Letters* **82**, 927–938.
- Green, R. A., Cubrinovski, M., Cox, B., Wood, C., Wotherspoon, L., Bradley, B., and Maurer, B., 2014. Select liquefaction case histories from the 2010–2011 Canterbury earthquake sequence, *Earthquake Spectra* **30**, 131–153.
- Green, R. A., Bommer, J. J., Rodriguez-Marek, A., Maurer, B., Stafford, P., Edwards, B., Kruiver, P. P., de Lange, G., and van Elk, J., 2018a. Addressing limitations in existing ‘simplified’ liquefaction triggering evaluation procedures: application to induced seismicity in the Groningen gas field, *Bulletin of Earthquake Engineering*.
- Green, R. A., Bommer, J. J., Stafford, P. J., Maurer, B. W., Edwards, B., Kruiver, P. P., Rodriguez-Marek, A., de Lange, G., Oates, S. J., Storck, T., Omid, P., Bourne, S. J., and van Elk, J., 2018b. *Liquefaction Hazard Pilot Study for the Groningen Region of the Netherlands due to Induced Seismicity*, NAM, the Netherlands.
- Green, R. A., Wotherspoon, L. M., and Cubrinovski, M., 2018c. Chapter 8: damage and restoration to river stopbanks, in *Earthquake-Flood Multi-Hazard Impacts on Lifeline Systems* (S. Giovinazzi, D. Hart, and C. Davis, eds.), American Society of Civil Engineers, Reston, VA, in press.
- Hakuno, M., 2004. Ground liquefaction is not dangerous for human lives, Paper No. 3225, in *Proceedings, 13th World Conference on Earthquake Engineering*, 1–6 August, Vancouver, Canada.
- Harkness, E. L., and Hassanain, M. A., 2002. Seismic damage in NSW, Australia: Construction insurance, social, and economic consequences, *Journal of Performance of Constructed Facilities* **16**, 75–84.
- Holzer, T. L., Jayko, A. S., Hauksson, E., Fletcher, J. P. B., Noce, T. E., Bennett, M. J., Dietel, C. M., and Hudnut, K. W., 2010. Liquefaction caused by the 2009 Olancho, California (USA), M5.2 earthquake, *Engineering Geology* **116**, 184–188.
- Hough, S. E., 2014. Shaking from injection-induced earthquakes in the central and eastern United States, *Bulletin of the Seismological Society of America* **104**, 2619–2626.
- Idriss, I. M., 1999. An update to the Seed-Idriss simplified procedure for evaluating liquefaction potential, in *Proceedings, TRB Workshop on New Approaches to Liquefaction*, Federal Highway Administration, Washington, DC.
- International Residential Code (IRC), 2007. *International Residential Code 2006*, New Jersey Edition, International Code Council, Country Club Hills, IL.
- Iwasaki, T., Tatsuoka, F., Tokida, K., and Yasuda, S., 1978. A practical method for assessing soil liquefaction potential based on case studies at various sites in Japan, in *Proceedings*,

- 2nd International Conference on Microzonation, 26 November–1 December, San Francisco, CA.
- Keefer, D. K., 1984. Landslides caused by earthquakes, *Geological Society of America Bulletin* **95**, 406–421.
- Klose, C. D., 2007. Geomechanical modeling of the nucleation process of the 1989 Newcastle earthquake in Australia, *Earth and Planetary Science Letters* **256**, 547–553.
- Knezevic Antonijevic, S., Arroucau, P., and Vlahovic, G., 2013. Seismotectonic model of the Kraljevo 3 November 2010 M_w 5.4 earthquake sequence, *Seismological Research Letters* **84**, 600–610.
- Kolawole, F., Atekwana, E. A., and Ismail, A., 2017. Near-surface electrical resistivity investigation of coseismic liquefaction-induced ground deformation associated with the 2016 M_w 5.8 Pawnee, Oklahoma, earthquake, *Seismological Research Letters* **88**, 1017–1023.
- Koukouvelas, I., Mpresiakas, A., Sokos, E., and Doutsos, T., 1996. The tectonic setting and earthquake ground hazards of the 1993 Pyrgos earthquake, Peloponnese, Greece, *Journal of the Geological Society, London* **153**, 39–49.
- Kramer, S. L., and Mayfield, R. T., 2007. Return period of soil liquefaction, *Journal of Geotechnical and Geoenvironmental Engineering* **133**, 802–813.
- Kuribayashi, E., and Tatsuoka, F., 1975. Brief review of liquefaction during earthquakes in Japan, *Soils & Foundations* **15**, 81–92.
- Lasley, S., Green, R. A., and Rodriguez-Marek, A., 2016. A new stress reduction coefficient relationship for liquefaction triggering analyses, *Journal of Geotechnical and Geoenvironmental Engineering* **142**.
- Lasley, S., Green, R. A., and Rodriguez-Marek, A., 2017. Number of equivalent stress cycles for liquefaction evaluations in active tectonic and stable continental regimes, *Journal of Geotechnical and Geoenvironmental Engineering* **143**.
- Liao, S. S. C., Veneziano, D., and Whitman, R. V., 1988. Regression models for evaluating liquefaction probability, *Journal of Geotechnical Engineering* **114**, 389–411.
- Marsh, M. L., Buckle, I. G., and Kavazanjian, Jr., E., 2014. *LRFD Seismic Analysis and Design of Bridges Reference Manual, FHWA NHI-15-004*, National Highway Institute, U.S. Department of Transportation, Federal Highway Administration, Washington, DC.
- Maurer, B. W., Green, R. A., Cubrinovski, M., and Bradley, B. A., 2014. Evaluation of the Liquefaction Potential Index for assessing liquefaction hazard in Christchurch, New Zealand, *Journal of Geotechnical and Geoenvironmental Engineering* **140**.
- Maurer, B. W., Green, R. A., and Taylor, O. -D. S., 2015. Moving towards an improved index for assessing liquefaction hazard: Lessons from historical data, *Soils & Foundations* **55**, 778–787.
- McCue, K., Wesson, V., and Gibson, G., 1990. The Newcastle, New South Wales, earthquake of 28 December 1989, *BMR Journal of Australian Geology & Geophysics* **11**, 559–567.
- Melchers, R. E., (ed.) 1990. *Newcastle Earthquake Study*, The Institution of Engineers, Barton, Australia.
- Meyerhof, G. G., 1956. Penetration tests and bearing capacity of cohesionless soils, *Journal of the Soil Mechanics and Foundation Division* **82**, 1–19.
- Meyerhof, G. G., 1974. Penetration testing outside Europe, in *Proceedings of the European Symposium on Penetration Testing, ESOPT*, 5–7 June, 1974, Stockholm, Sweden.
- Michetti, A. M., Livio, F., Chunga, K., Esposito, E., Fanetti, D., Gambillara, R., Martin, S., Pasquaré, F., Porfido, S., Sileo, G., and Vittori, E., 2005. Ground effects of the M_L 5.2,

- November 24, 2004, Salò earthquake, Northern Italy, and the seismic hazard of the western Southern Alps, *Rendiconti della Società Geologica Italiana* **1**, 134–135.
- Mitchell, J. K., and Green, R. A., 2017. Some induced seismicity considerations in geo-energy resource development, *Geomechanics for Energy and the Environment* **10**, 3–11.
- Morgan, M. L., and Morgan, K. S., 2011. *Preliminary Damage Report of the August 22, 2011 M_w 5.3 Earthquake Near Trinidad, Colorado*, Colorado Geological Survey, Golden, CO.
- Musson, R. M. W., 1998. The Barrow-in-Furness earthquake of 15 February 1865: Liquefaction from a very small magnitude earthquake, *Pure & Applied Geophysics* **152**, 733–745.
- Naval Facilities Engineering Command (NAVFAC), 1986. *Foundations and Earth Structures, Design Manual (DM)-7.02*, Naval Facilities Engineering Command, Alexandria, VA.
- Nieuwenhuis, J. D., 1994. Liquefaction and the 1992 Roermond earthquake, the Netherlands, *Geologie en Mijnbouw* **73**, 357–364.
- Novakovic, M., Atkinson, G. M., and Assatourians, K., 2018. Empirically calibrated ground-motion prediction equation for Oklahoma, *Bulletin of the Seismological Society of America* **108**, 2444–2461.
- Pankow, K., Arabasz, W. J., Carey, R., Christenson, G., Groeneveld, J., Maxfield, B., McDonough, P. W., Welliver, B., and Youd, T. L., 2015. *Scenario for a Magnitude 7.0 Earthquake on the Wasatch Fault-Salt Lake City Segment*, Earthquake Engineering Research Institute, Oakland, CA.
- Papadopoulos, G. A., 1993. The 20 March 1992 South Aegean, Greece, earthquake ($M_S = 5.3$): possible anomalous effects, *Terra Nova* **5**, 399–404.
- Papadopoulos, G. A., and Lefkopoulos, G., 1993. Magnitude-distance relations for liquefaction in soil from earthquakes, *Bulletin of the Seismological Society of America* **83**, 925–938.
- Papanikolaou, I. D., Papanikolaou, D. I., and Lekkas, E. L., 2009. Advances and limitations of the Environmental Seismic Intensity scale (ESI 2007) regarding near-field and far-field effects from recent earthquakes in Greece: implications for the seismic hazard assessment, in *Palaeoseismology: Historical and Prehistorical Records of Earthquake Ground Effects for Seismic Hazard Assessment* (K. Reicherter, A. M. Michetti and P. G. Silva, eds.), The Geological Society, London, United Kingdom, 11–30.
- Pierre, J. -R., and Lamontagne, M., 2004. The 20 April 2002, M_w 5.0 Au Sable Forks, New York, earthquake: a supplementary source of knowledge on earthquake damage to lifelines and buildings in Eastern North America, *Seismological Research Letters* **75**, 626–636.
- Quigley, M. C., Bastin, S., and Bradley, B. A., 2013. Recurrent liquefaction in Christchurch, New Zealand, during the Canterbury earthquake sequence, *Geology* **41**, 419–422.
- Quinn, C. D., Glen, R. A., and Diessel, C. F. K., 2008. Discussion of “Geomechanical modeling of the nucleation process of Australia’s 1989 M_S 5.6 Newcastle earthquake” by C.D. Klose [*Earth Planet. Sci. Lett.* **256** (2007) 547–553], *Earth and Planetary Science Letters* **269**, 296–302.
- Robertson, P. K., 2015. *Guide to Cone Penetration Testing*, 6th Ed., Gregg Drilling & Testing, Inc., Signal Hill, CA.
- Rodriguez, C. E., Bommer, J. J., and Chandler, R. J., 1999. Earthquake-induced landslides 1980–1997, *Soil Dynamics & Earthquake Engineering* **18**, 325–346.
- Rodriguez-Arriaga, E., and Green, R. A., 2018. Assessment of the cyclic strain approach for calculating liquefaction triggering, *Soil Dynamics & Earthquake Engineering* **113**, 202–214.

- Rubinstein, J. L., Ellsworth, W. L., McGarr, A., and Benz, H. M., 2014. The 2001-present induced earthquake sequence in the Raton Basin of northern New Mexico and southern Colorado, *Bulletin of the Seismological Society of America* **104**, 2162–2181.
- Santucci de Magistris, F., Lanzano, G., Forte, G., and Fabbrocino, G., 2013. A database for PGA threshold in liquefaction occurrence, *Soil Dynamics & Earthquake Engineering* **54**, 17–19.
- Seeber, L., Kim, W. -Y., Armbruster, J. G., Du, W. -X., and Lerner-Lam, A., 2002. The 20 April 2002 M_w 5.0 earthquake near Au Sable Forks, Adirondacks, New York: a first glance at a new sequence, *Seismological Research Letters* **73**, 480–489.
- Sims, J. D., and Gavin, C. D., 1995. Recurrent liquefaction induced by the 1989 Loma Prieta earthquake and 1990 and 1991 aftershocks: Implications for paleoseismicity studies, *Bulletin of the Seismological Society of America* **85**, 51–65.
- The Argus, 1903. The Warrnambool earthquake, available at <https://trove.nla.gov.au/newspaper/article/9812330> (last accessed 4 October 2018).
- The Register, 1903. The Warrnambool earthquake, available at <https://trove.nla.gov.au/newspaper/article/56216471> (last accessed 4 October 2018).
- Tonkin & Taylor, 2013. *Liquefaction Vulnerability Study, Report T&T Ref 52020.0200/v1.0*, New Zealand Earthquake Commission, Auckland, New Zealand.
- Wood, C. M., Cox, B. R., Green, R. A., Wotherspoon, L., Bradley, B. A., and Cubrinovski, M., 2017. Vs-based evaluation of select liquefaction case histories from the 2010–2011 Canterbury earthquake sequence, *Journal of Geotechnical and Geoenvironmental Engineering*, **143**.

(Received 22 March 2018; Accepted 4 March 2019)