

# PrioDeX: A Data Exchange Middleware for Efficient Event Prioritization in SDN-Based IoT Systems

GEORGIOS BOULOUKAKIS, SAMOVAR, Télécom SudParis, IP Paris, France

KYLE BENSON, RTI, USA

LUCA SCALZOTTO, Injenia S.r.l., Bologna, Italy

PAOLO BELLAVISTA, Univ. of Bologna, Italy

CASEY GRANT, NFFA, USA

VALÉRIE ISSARNY, INRIA Paris, France

SHARAD MEHROTRA, UC Irvine, USA

IOANNIS MOSCHOLIOS, Univ. of Peloponnese, Greece

NALINI VENKATASUBRAMANIAN, UC Irvine, USA

Real-time event detection and targeted decision making for emerging mission-critical applications require systems that extract and process relevant data from IoT sources in smart spaces. Oftentimes, this data is heterogeneous in size, relevance, and urgency, which creates a challenge when considering that different groups of stakeholders (e.g., first responders, medical staff, government officials, etc.) require such data to be delivered in a reliable and timely manner. Furthermore, in mission-critical settings, networks can become constrained due to lossy channels and failed components, which ultimately add to the complexity of the problem. In this article, we propose PrioDeX, a cross-layer middleware system that enables timely and reliable delivery of mission-critical data from IoT sources to relevant consumers through the prioritization of messages. It integrates parameters at the application, network, and middleware layers into a data exchange service that accurately estimates end-to-end performance metrics through a queueing analytical model. PrioDeX proposes novel algorithms that utilize the results of this analysis to tune data exchange configurations (event priorities and dropping policies), which is necessary for satisfying situational awareness requirements and resource constraints. PrioDeX leverages Software-Defined Networking (SDN) methodologies to enforce these configurations in the IoT network infrastructure. We evaluate our approach using both simulated and prototype-based experiments in a smart building fire response scenario. Our application-aware prioritization algorithm improves the value of exchanged information by 36% when compared with no prioritization; the addition of our network-aware drop rate policies improves this performance by 42% over priorities only and by 94% over no prioritization.

19

This work was supported by NSF award CNS 1450768, DARPA agreement # FA8750-16-2-0021, the Inria@SiliconValley International Lab and the research associate team MINES.

Authors' addresses: G. Bouloukakakis, SAMOVAR, Télécom SudParis, IP Paris, France; email: georgios.bouloukakakis@telecom-sudparis.eu; K. Benson, RTI, USA; email: kebson@ics.uci.edu; L. Scalzotto, Injenia S.r.l., Bologna, Italy; email: luca.scalzotto@studio.unibo.it; P. Bellavista, Univ. of Bologna, Italy; email: paolo.bellavista@unibo.it; C. Grant, NFFA, USA; email: cgrant@nfpa.org; V. Issarny, INRIA Paris, France; email: valerie.issarny@inria.fr; S. Mehrotra, UC Irvine, USA; email: sharad@ics.uci.edu; I. Moscholios, Univ. of Peloponnese, Greece; email: idm@uop.gr; N. Venkatasubramanian, UC Irvine, USA; email: nalini@uci.edu.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](https://permissions.acm.org).

© 2021 Copyright held by the owner/author(s). Publication rights licensed to ACM.

2577-6207/2021/07-ART19 \$15.00

<https://doi.org/10.1145/3456301>

CCS Concepts: • **Networks** → *Programming interfaces*; **Network performance analysis**; • **Computer systems organization** → **Reliability**;

Additional Key Words and Phrases: Publish/subscribe middleware, event prioritization, utility functions, queueing networks, SDN

#### ACM Reference format:

Georgios Bouloukakis, Kyle Benson, Luca Scalzotto, Paolo Bellavista, Casey Grant, Valérie Issarny, Sharad Mehrotra, Ioannis Moscholios, and Nalini Venkatasubramanian. 2021. PrioDeX: A Data Exchange Middleware for Efficient Event Prioritization in SDN-Based IoT Systems. *ACM Trans. Internet Things* 2, 3, Article 19 (July 2021), 32 pages.

<https://doi.org/10.1145/3456301>

## 1 INTRODUCTION

The integration of the *Internet of Things* (IoT) into daily life promises to revolutionize societal-scale operations. It integrates pervasive sensing/actuation, dynamic data analytics, and communications, which encourages domains such as transportation, home automation, health care, and emergency response to become increasingly IoT enabled. Smart spaces such as office buildings tend to increase the deployment of novel networking infrastructures along with state-of-the-art IoT devices; this provides data-driven insights to improve the situational awareness of a space. This is particularly useful in mission-critical applications for enabling timely and reliable communication in smart spaces. Recent smart city efforts such as the SmartAmerica and Global City Teams Challenges have showcased the integration of IoT into a variety of application domains [9, 11, 35, 61].

A distributed data exchange system that manages relevant data flows to/from IoT devices and individuals (data producers and consumers) is a critical centerpiece of IoT deployments. In smart spaces, such devices are deployed at the Edge (closer to individuals), and thus, data exchange systems must support a flexible Edge networking infrastructure to manage data flows with varying quality levels. Producers of data correspond to IoT sensors, *events* to data produced/consumed, and consumers of data to interested entities (i.e., human stakeholders or other IoT devices and services). The data exchange system routes information to actuators (e.g., alarms) or human stakeholders. In mission-critical emergency scenarios, IoT devices can forward raw sensor data to interested recipients (e.g., first responders, medical staff, public safety officers, government officials, etc.) through data exchange systems to help coordinate the response effort.

Key challenges arise for enabling timely data exchange to a diverse set of recipients, including (1) managing heterogeneous information with varying size, format, relevance, and urgency; (2) seamless dynamic integration of new IoT data sources with pre-existing sources and information; and (3) supporting reliable and timely communication over constrained networks—e.g., due to lossy channels and failed components. For instance, during a structural fire, firefighters require timely reception of up-to-date situational awareness information. Given the heterogeneity of this information and the limited networking resources for delivering notifications, we believe event prioritization is necessary in such mission-critical settings. Existing data exchange systems [6, 38, 50, 54, 58, 65] provide mechanisms for event prioritization either by manually assigning priorities to specific data flows or by dynamically assigning them based on the application-level data flows/types (e.g., video data) or even QoS-specific requirements (e.g., delay-sensitive apps). However, such systems cannot be customized to support mission-critical applications with dynamic

changes of the app requirements, interested data recipients, data flows/types, and networking conditions.

In this article we propose **PrioDeX**, an integration middleware that enables timely and reliable delivery of the most critical data to relevant data recipients despite challenging network conditions. PrioDeX unifies smartspace IoT data and edge infrastructures with programmable network infrastructures and domain-specific applications (e.g., smart firefighting). It leverages Edge computing (i.e., publish/subscribe brokers at the network edge) and *Software-Defined Networking* (SDN) to bridge critical application requirements with the network state. The main contribution of PrioDeX is the capability of configuring the SDN-enabled physical network to prioritize events according to the situational awareness app requirements and network resource constraints. We model the Edge infrastructure using priority queues to estimate performance metrics (response times, delivery success rates) based on the system workload. These are given as input to PrioDeX algorithms to assign priorities and carefully tune packet drop rates (for bandwidth allocation) to active subscriptions.

The PrioDeX middleware combines several novel capabilities and design features. This article expands upon our previous work [10] to include experiments and experiences with our prototype implementation as well as the formal proof of our new analytical model and derivations of our priority assignment and drop rate policies. The key contributions of this article are:

- Introducing a cross-layer approach (application, middleware, network) to prioritize mission-critical data exchange in IoT-enhanced smart spaces with SDN-enabled infrastructures (Section 2).
- Providing an analytical model using queueing theory that estimates performance metrics for cross-layer IoT interactions. This model includes our new multi-class priority queueing model. We use it here to represent an SDN switch, but it is generally suitable for use in other queueing networks (Section 3).
- Developing novel algorithms that leverage the above queueing model to explore the configuration parameter space for IoT event prioritization and delivery/delay tuning (Section 4).
- Implementing the PrioDeX prototype that integrates the above algorithms and an OpenFlow-enabled controller to configure the SDN-based underlying infrastructure (Section 5).
- Evaluating the PrioDeX middleware by describing our experimental framework that relies on both simulation and prototype (enriched with an emulated network) implementations for configuring and running experiments; evaluating our middleware’s approach; comparing the proposed algorithms’ performance; and validating our proposed analytical model (Section 6).

We conclude this article in Section 8 with lessons learned and a look toward future work in this area.

## 2 OVERVIEW

In this section, we describe an IoT-enhanced structural fire scenario where efficient data exchange is necessary for satisfying situational awareness requirements of first responders. Then, we propose a cross-layer middleware approach to address these requirements via the efficient delivery of mission-critical data from IoT sources to relevant consumers.

### 2.1 Motivating Use Case Scenario

To motivate the need for timely IoT data exchange and highlight the challenges involved, we begin with an IoT-enhanced fire scenario. During a structural fire, an occupant or automated system

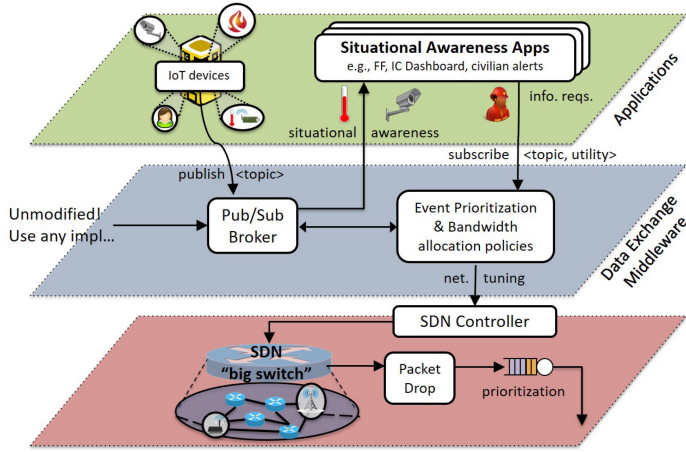


Fig. 1. The PrioDeX cross-layer middleware.

activates an emergency dispatch process, which then notifies a local fire department. After some time, a team of *Fire Fighters* (FFs) along with an *Incident Commander* (IC) arrive; the IC is responsible for coordinating the effort from an *Incident Command Post* (ICP) set up on-site. To effectively manage the dynamic response and minimize casualties, injuries, and property damage, the IC requires up-to-date situational awareness information from the building. Today, the IC still derives much of this information from non-digital sources (e.g., human-initiated reports via voice or radio, paper records, etc.). However, sensorized smartspaces (equipped with IoT devices) enable access to live data feeds that can generate actionable information in real time via proper filtering, prioritizing, and analysis. Maintaining up-to-date situational awareness for *Smart Fire Fighting* (SFF) requires the integration and enrichment of static and dynamic data from buildings and IoT infrastructure. Static information such as building floor plans, inspection histories, and presence of hazardous material can be gathered a priori. For example, an emergency operations center may monitor third-party data streams (e.g., weather, social media) and forward relevant information to the ICP. Dynamic information published by IoT devices (in the building and brought by *Fire Fighters* (FFs)) must be delivered to relevant stakeholders and combined with contextual knowledge to generate situational awareness. Such information includes motion sensing, location, occupancy, activity tracking, smoke levels, air flow rate, audiovisual feeds, and so forth. Different data types vary in importance depending on the situation (e.g., “smoke” > “water pressure”) and the stakeholders’ (e.g., IC, FFs, residents) data requests. Then, stakeholders visualize or act based on the received information. For instance, an IC may use a tablet running a situational awareness dashboard to monitor the situation and coordinate the response effort. FFs may use some less intrusive interface (e.g., a heads-up display on their glasses) to receive similar non-voice commands from the IC. A key challenge for SFF is the delivery of mission-critical data for “timely, targeted decision making” in an unreliable, partially available, and congested network environment [30].

## 2.2 Enabling Efficient Prioritization at the Edge

We now provide an overview on how the PrioDeX middleware is designed to address the requirements and challenges of the above structural fire scenario. We frame our discussions in terms of the three layers depicted in Figure 1: (1) mission-critical applications, (2) abstractions representing the physical network infrastructure, and (3) the data exchange middleware bridging these two layers. Our proposed solution aids in managing the overall system configuration and flow of

information. PrioDeX integrates other state-of-the-art technologies: data APIs for interfacing with IoT data (e.g., from Edge devices in the building), a local pub/sub broker (or network of brokers), a thin client middleware running on each subscribing IoT device, and SDN APIs for managing the network infrastructure. It implements novel algorithms and provides middleware APIs for our data prioritization and network management approach. To ensure delivery of the most important events despite network resource constraints (e.g., failures, poor signal strength, limited bandwidth), it **prioritizes events** and **allocates available network bandwidth** according to application requirements.

*Application Layer.* PrioDeX subscriber devices run a client middleware to establish broker connections, retrieve a list of event topics, and subscribe to relevant ones. Since different data vary by importance, we propose prioritizing events according to their relative importance to the emergency response effort. To configure this, subscribers register **utility functions** with their PrioDeX subscriptions (see Figure 1). These functions capture a quantified measure of value for varying rates of event delivery performance. Our proposed algorithms consider these utility functions when configuring the data exchange and network to maximize the users' situational awareness.

*Data Exchange Layer.* PrioDeX prioritizes subscriptions according to their subscriber-specified utility functions. It leverages the theoretic analysis we present in Section 3 to estimate system performance under given configurations. This analysis drives the algorithms presented in Section 4 that assign discrete **priority classes** and allocate available network bandwidth. PrioDeX connects publishers (e.g., Edge devices) and subscribers (e.g., IC, FFs) with the data exchange broker, which performs the actual routing of events. While some existing data exchange implementations and protocols support priorities, configuring them requires specific APIs [47]. Furthermore, many popular options (e.g., the MQTT [43] protocol and associated broker implementations) do not support priorities and so require equal treatment of all events transmitted to the same subscriber. To decouple PrioDeX from the underlying pub/sub broker, which may be specific to the site's Edge devices, we do not employ app-layer (i.e., in-broker) prioritization. Rather, we propose enforcing priorities at the network layer through unified APIs provided by SDN. This approach accounts for both app-level requirements (e.g., utility functions) and network-level state information (e.g., available bandwidth) without mandating (or extensively modifying) specific broker technologies. Hence, PrioDeX essentially extends the data exchange broker/protocol with network and application-aware prioritization.

*Network Layer.* PrioDeX manages the network infrastructure through APIs provided by an SDN controller that likely runs alongside the Edge. It gathers network state information to derive resource constraints. This is combined with the subscribers' information requirements to drive its management algorithms. Zhang and Jacobsen previously advocated for a similar approach [62] of a centrally gathered global view of pub/sub systems' state to simplify its management. They refer to this central control approach as *SDN-like* because it separates the pub/sub control and data plane. They further propose integrating SDN with the data exchange middleware, which this centralization cleanly enables. We advocate for this approach in IoT settings when offloading device management and data processing from constrained devices leads to centralized (e.g., cloud-centric) designs. For simplicity of discussion, we consider the **big switch** model shown in Figure 1 that abstracts the entire local physical network into a single virtual SDN switch. This provides a simplified single-network view of the whole distributed system that may span multiple physical heterogeneous networks (e.g., Wi-Fi or local cellular) and different locations.

To enforce event priorities at the network layer, PrioDeX leverages SDN APIs. It configures priority queueing disciplines for packets matching the different subscriptions. However, for the network to distinguish the data exchange-layer concept of subscriptions, we must first translate it to a network-level concept. As shown in Figure 2, we accomplish this through the SDN concept



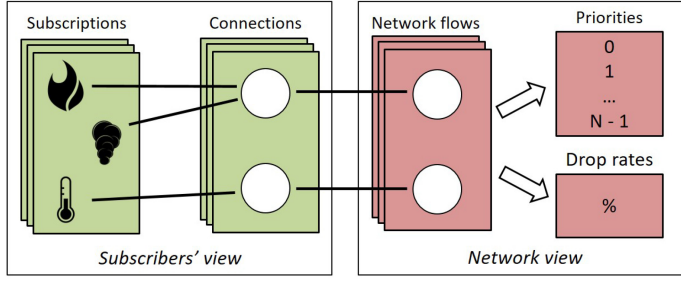


Fig. 2. PrioDeX prioritizes subscriptions at the SDN layer using multiple connections per subscriber.

of **network flows**. SDN switches match incoming packets of a particular network flow according to header information. For example, OpenFlow considers OSI Layer 2-4 fields such as IP/MAC address, UDP/TCP port, VLAN, and so forth. To differentiate subscriptions belonging to different network flows, a PrioDeX subscriber maintains multiple **network connections** with the pub/sub broker (e.g., over different OSI Layer 4 port numbers). This may represent different applications running on the same device and/or one application opening multiple connections. The latter case enables the network to distinguish and manage individual groups of subscriptions based on their assigned connection. The data exchange layer dictates this assignment of (possibly multiple) subscriptions to one network connection and its corresponding unique network flow. Subscribers initiate multiple connections and then register each subscription to avoid directly configuring the underlying data exchange broker. PrioDeX also assigns each network flow a priority level by considering subscriber requirements. It configures the SDN switches to forward packets matching these network flows through the proper priority queue. To manage available network resources, PrioDeX also allocates bandwidth to each network flow. It applies **preemptive packet drop rates** that consider the utility of each network flow's subscriptions. We propose dropping lower-priority packets before switch buffers fill up to prevent high delays and dropping of higher-priority packets. Section 4.3 discusses this concept further and proposes our optimization-based algorithm for setting these drop rates. Our proposal leverages discrete priority classes to drive priority queueing disciplines and defines the best priority assignments rather than assuming them as a given input.

### 3 PRIODEX FORMAL MODEL

To enable timely and reliable data exchange in IoT systems, existing solutions propose creating performance models that can be leveraged for system tuning. Such models must consider all three layers' characteristics and their effects on each other. Existing efforts typically focus on each layer in isolation to model the performance of middleware systems [14, 36, 49], network infrastructures [7, 29], and more recently SDN infrastructures [23, 55]. In this article, we model cross-layer interactions by composing and extending previous work [14, 15] at each layer through the unified framework of *queueing theory* [31, 52]. PrioDeX combines queueing theoretic approaches from both the middleware and network layers to construct the representative and extensible three-layer queueing network shown in Figure 3. At the middleware layer, M/M/1 queues are used to model the subscription matching process and the delivery of events to subscribers. At the networking layer, M/M/1, multi-class and priority-class queues are used to model packet processing, transmission, and prioritization. When increasing the number of brokers, subscribers, and switches, the number of queues leveraged are increased as well. The data exchange middleware bridges the network infrastructure and application layers to enable a novel cross-layer end-to-end performance model. We derive this analytical model to estimate a particular configuration's expected performance.

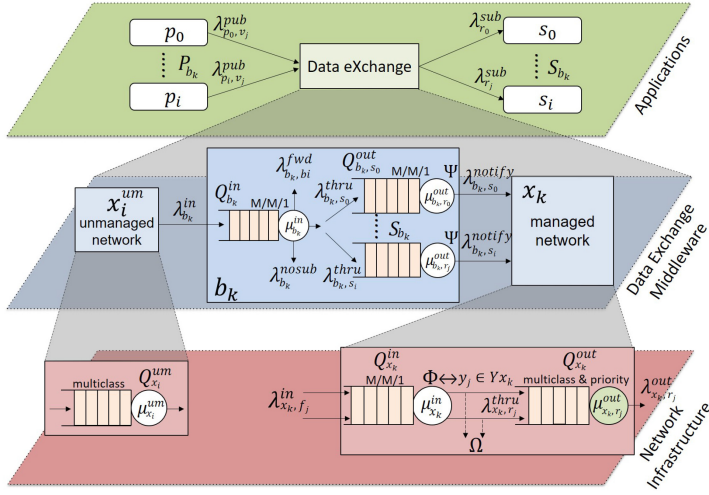


Fig. 3. PrioDeX queueing network model.

Table 1. Notations of the Parameters in Our Cross-Layer Data Exchange Model

Notation	Description
<b>Application Layer</b>	
$v_j \in V$	event topics
$s_i \in S$	subscribers
$r_j \in R$	subscriptions
$p_i \in P$	publishers
$\lambda_{p_i, v_j}^{pub}$	topic $v_j$ 's pub rate
$\lambda_{r_j}^{sub}$	$r_j$ 's delivery rate
$\Xi_{r_j}$	$r_j$ 's success rate
$\Delta_{r_j}$	$r_j$ 's end-to-end response time
<b>Data Exchange Layer</b>	
$b_k \in B$	brokers
$\lambda_{b_k, r_j}^{notify}$	$r_j$ 's notification rate
$\Psi : R \mapsto F$	network flow for a subscription
$\Phi : F \mapsto Y$	priority for a network flow
$\Omega : F \mapsto [0, 1]$	packet drop rate for a network flow
<b>Network Layer</b>	
$x_k \in X$	SDN switches
$h_j \in H, H = P \cup S \cup B$	network hosts
$w_{x_k, h_j} \in W, w_{x_k, h_j} \in \mathbb{N}$	bandwidth between $x_k$ and $h_j$
$G_{v_j} \in \mathbb{Z}_{>0}$	serialized packet size for topic $v_j$
$z_{h_j, h_i} \in Z, z_{h_j, h_i} \in [0, 1]$	packet error rate
$\Gamma : \mathbb{N} \times H \times H \mapsto \mathbb{N}$	transforms event departure to arrival rates (e.g., packet errors)
$f_j \in F$	network flows
$y_j \in Y$	unique priority classes

### 3.1 Queueing Network Performance Modeling

Refer to Table 1 for the notations used throughout this section.

**Application Modeling.** Each publisher  $p_i$  publishes to a set of topics  $V_{p_i} \subseteq V$  (e.g., “smoke”). Let  $\lambda_{p_i, v_j}^{pub}$  be the publication rate of events with topic  $v_j$  published by  $p_i$  per unit time.

**ASSUMPTION 1.**  $\lambda_{p_i, v_j}^{pub}$  is based on a Poisson process.

We define each subscription as a tuple  $r_j = (s_i, v_j, U_{r_j})$  where the utility function  $U_{r_j}$  quantifies the information value for subscriber  $s_i$  receiving events with topic  $v_j$ . Let  $R_{s_i} = \{r_j \in R : s_i \in r_j\}$

be the set of prioritized information requests (i.e., subscriptions) for each subscriber  $s_i$ . Let  $\lambda_{r_j}^{sub}$  be the incoming rate of events matching subscription  $r_j$  received per unit time by subscriber  $s_i$ .

Let  $\Xi_{r_j}$  be the *success rate* of delivering  $\lambda_{r_j}^{sub}$ , which can be estimated as follows:

$$E[\Xi_{r_j}] = \frac{\lambda_{r_j}^{sub}}{\sum_{p_i \in P} \lambda_{p_i, v_j}^{pub}}, \quad (1)$$

where the denominator aggregates events produced from publishers for topic  $v_j$  (Assumption 1).

Let  $\Delta_{r_j}$  be the average *end-to-end response time* of events matching subscription  $r_j = (s_i, v_j, U_{r_j})$  from the moment they are published until  $s_i$  receives them; this is a function of event processing, queueing, transmission, and propagation delays (defined later in this section).

**Data Exchange Modeling.** The data exchange layer represents a network of broker nodes  $B$ . We assume that each publisher  $p_i$  connects to its *home broker*  $b_{p_i}$ , which we define as the broker to which  $p_i$  publishes events. A home broker  $b_{s_i}$  is defined analogously for each subscriber  $s_i$ . Furthermore, we define the set of publishers connected with  $b_k$  as  $P_{b_k} = \{p_i \in P : b_k = b_{p_i}\}$ , the set of subscribers connected with  $b_k$  as  $S_{b_k} = \{s_i \in S : b_k = b_{s_i}\}$ , and the set of subscriptions handled by  $b_k$  as  $R_{b_k} = \cup_{s_i \in S_{b_k}} R_{s_i}$ . A broker  $b_k$  forwards events with rate  $\lambda_{b_k, b_i}^{fwd}$  to another broker  $b_i \in B$  for event delivery to  $b_i$ 's subscribers. As depicted in Figure 3, we model each broker  $b_k$  using a single inbound M/M/1 queue  $Q_{b_k}^{in}$  and multiple outbound M/M/1 queues  $Q_{b_k, s_i}^{out}$ . By Assumption 1 and the exponentially distributed service rate of  $Q_{b_i}^{in}$ ,  $\forall b_i \in B - \{b_k\}$ , we know that  $\lambda_{b_k, b_i}^{fwd}$  follows a Poisson distribution. Hence, we can define the arrival rate of events at  $Q_{b_k}^{in}$  as the sum of all (post-network transformation) event publication/forwarding rates over all publishers/brokers:

$$\lambda_{b_k}^{in} = \sum_{p_i \in P_{b_k}} \sum_{v_j \in V_{p_i}} \Gamma(\lambda_{p_i, v_j}^{pub}, p_i, b_k) + \sum_{b_i \in B, b_i \neq b_k} \Gamma(\lambda_{b_i, b_k}^{fwd}, b_i, b_k), \quad (2)$$

where  $\Gamma$ , which we define later in this section, represents network-layer traffic shaping due to error rates, administrative policies, and so forth.

Forwarding, replication, or dropping of events based on current subscriptions occurs at the exit of  $Q_{b_k}^{in}$ . Let  $\mu_{b_k}^{in}$  be  $Q_{b_k}^{in}$ 's service rate for analyzing an incoming event and determining where to forward it (e.g., based on a topic routing tree). We assume  $\mu_{b_k}^{in}$  is constant (or averaged) across all topics and independent of current subscriptions. Events not matching subscriptions  $R_{b_k}$  are dropped with rate  $\lambda_{b_k}^{nosub}$ . For each subscriber  $s_i \in S_{b_k}$ ,  $b_k$  forwards events matching a subscription  $r_j \in R_{s_i}$  to  $Q_{b_k, s_i}^{out}$  with rate  $\lambda_{b_k, s_i}^{thru}$  for transmission to  $s_i$ . Recall that each broker maintains multiple connections (i.e., network flows) with each subscriber. Let  $\mu_{b_k, r_j}^{out}$  be the service rate at  $Q_{b_k, s_i}^{out}$  that captures the time it takes to map an event matching subscription  $r_j$  to the corresponding connection of  $s_i$ . It forwards these publications into the network layer with rate  $\lambda_{b_k, r_j}^{notify}$ . Hence, we define the per-subscriber forwarding rate as:

$$\lambda_{b_k, s_i}^{notify} = \sum_{r_j \in R_{s_i}} \lambda_{b_k, r_j}^{notify}. \quad (3)$$

**PrioDeX Configuration Parameters.** The data exchange layer also represents the PrioDeX configuration service. PrioDeX associates each subscription with one of the *network flows*  $f_j \in F$  in order to manage subscription traffic in a network-aware manner. Recall from Section 2 that network flows represent multiple connections between a subscriber and its home broker. We define the set of network flows for a particular subscriber  $s_i$  as  $F_{s_i} \subseteq F$ . Additionally PrioDeX defines a set of



unique *priority classes*  $y_j \in Y$  to which each network flow is assigned; this enables network traffic to be managed in an application-aware manner. Note that  $y_j$  has higher priority than  $y_k$  for  $j < k$ , i.e.,  $y_0$  is the highest priority. To configure the end-to-end data exchange interactions across all three layers, PrioDeX employs the following functions:

$\Psi : R \mapsto F$  is the function that maps subscriptions (i.e., events matching them) to the corresponding subscribers' network flows. Note that we denote  $\Psi(s_i, v_j) = \Psi(r_j)$  as the network flow for subscription  $r_j = (s_i, v_j, U_{r_j})$  and so  $\Psi : S \times V \mapsto F$ . As described in Section 2, this mapping allows the SDN data plane to distinguish packets containing events from each other, based on their subscriptions.

$\Phi : F \mapsto Y$  is the function mapping network flows to priority classes. This defines which priority class (i.e., priority queue) the SDN infrastructure uses for a packet transmitted on network flow  $f_j$ . This packet contains event(s) matching subscriber  $s_i$ 's subscription  $r_j$  where  $f_j = \Psi(r_j)$ . Hence  $\Phi \circ \Psi(r_j)$  is subscription  $r_j$ 's priority.

$\Omega : F \mapsto [0, 1]$  is the function mapping network flows to preemptive packet drop probabilities. By dropping some packets on a network flow, PrioDeX tunes the data exchange configuration more accurately than through priority assignment alone. Somewhat akin to network traffic policing, this technique lowers the bandwidth usage of a network flow so that the aggregate bandwidth needs of all flows does not exceed that which is available. By dropping packets in the lower-priority flows, this prevents switch buffers from filling up and dropping higher-priority packets.

*Network Modeling.* Publications forwarded to the network layer are encapsulated in packets for transmission by the SDN infrastructure. To simplify our analysis, we leverage the following:

**ASSUMPTION 2.** *The data exchange and applications encapsulate each event in a single packet for transmission through the network.*

Let  $X$  be the set of SDN switches that connect with the various hosts  $H$ . A host  $h_j$  may have multiple physical network interfaces/connections to one or more switches, and packets between two hosts may traverse multiple routes. However, SDN abstractions support the following assumption that simplifies our analysis:

**ASSUMPTION 3.** *We consider multiple switches/routes between two hosts as aggregated into a single virtual SDN switch/link that captures the underlying physical network topology and characteristics.*

By Assumption 3, we need only to model a single *big switch* serving a publisher or subscriber. Hence, we refer to  $x_{s_i}$  as the *PrioDeX-managed SDN switch* that controls traffic between  $b_{s_i}$  and  $s_i$ . We refer to  $x_{p_i}$  as the *unmanaged SDN switch* that exposes the network characteristics (defined below) of the network channel between  $b_{p_i}$  and  $p_i$ . Note that PrioDeX does not manage the latter switch because this might conflict with deployment-specific IoT device configurations. To model multiple hosts sharing the same network medium (e.g., a wireless channel), we apply Assumption 3 and model such a channel as one switch serving multiple hosts. Therefore, we define the set of subscribers served by switch  $x_k$  as  $S_{x_k} = \{s_i \in S : x_{s_i} = x_k\}$ , all of their subscriptions as  $R_{x_k} = \{\cup_{s_i \in S_{x_k}} R_{s_i}\}$ , and all of their network flows as  $F_{x_k}$ . Similarly, let  $P_{x_k} = \{p_i \in P : x_{p_i} = x_k\}$  be the set of publishers served by  $x_k$ .

Let  $Q_{x_i}^{um}$  be the queue modeling the *unmanaged switch*  $x_i$  that encompasses a *publisher-broker* or *broker-broker* link. By Assumption 2, we have the packet arrival rate for publications and forwarded events at switch  $x_i$  as  $\lambda_{p_i, v_j}^{pub}$  and  $\lambda_{b_k, b_i, v_j}^{fwd}$ , respectively. We model  $Q_{x_i}^{um}$  as a multi-class queue, which enables us to define the average transmission delay of a packet ( $\Delta_{r_j}^{tx}$ ) based on its size. Each class corresponds to the topic of an event encapsulated within a packet. Hence, we define the expected *serialized size* (e.g., in bytes) of a packet that, by Assumption 2, contains a single event published to topic  $v_j$  as  $G_{v_j} \in \mathbb{Z}_{>0}$ . Using Assumption 3, we have  $w_{x_k, h_j}$  as the bottleneck bandwidth available

between two hosts (i.e., from the switch  $x_k$  serving them to the destination host  $h_j$ ). Therefore, we can define a per-topic packet transmission rate as

$$\mu_{x_i, v_j}^{um} = \frac{w_{x_i, b_k}}{G_{v_j}}. \quad (4)$$

Equation (4) is used to estimate the average *transmission delay*  $\Delta_{x_i}^{um}$  (see Equation (15)). We apply  $\Gamma$  to packets departing the switch queue  $Q_{x_i}^{um}$  in order to transform event departure rates from a host  $h_j$  to event arrival rates at the destination host  $h_i$ . To simplify our analysis, we leave retransmission of packets for future work and instead consider only packet error rates. Let  $z_{h_j, h_i} \in [0, 1]$  be this packet error rate that allows us to model packet drops at the single switch between these hosts. We have the arrival rate of publications (on topic  $v_j$  from publisher  $p_i$  at broker  $b_k$ ) as

$$\Gamma(\lambda_{p_i, v_j, p_i, b_k}^{pub}) = (1 - z_{p_i, b_k}) \lambda_{p_i, v_j}^{pub}. \quad (5)$$

We define the transformed arrival rate of events forwarded from broker  $b_i$  to  $b_k$  similarly.

We model each *managed SDN switch* encompassing a *broker-subscriber* link as two different queues: (1) an M/M/1 queue  $Q_{x_k}^{in}$  that feeds into (2) our newly proposed queueing model: a non-preemptive priority and multi-class queue  $Q_{x_k}^{out}$ . By Assumption 2, we therefore have the arrival rate at switch  $x_k$  of event-encapsulating packets within a network flow  $f_j$  as  $\lambda_{x_k, f_j}^{in} \cdot Q_{x_k}^{in}$  processes each incoming packet by matching its header contents to a corresponding network flow  $f_j$  and determining the assigned priority (i.e.,  $\Phi(f_j)$ ). Let  $\mu_{x_k}^{in}$  be the service rate at  $Q_{x_k}^{in}$  that captures the time required to perform this matching (e.g., an SDN switch TCAM lookup), assign the given priority, and route the packet to the appropriate output port. Note that this might actually capture delays from forwarding packets along a multi-switch route. Before enqueueing the packet at the correct output port, we have the per-subscription arrival rate at  $Q_{x_k}^{out}$  as

$$\lambda_{x_k, r_j}^{thru} = (1 - \Omega \circ \Psi(r_j)) \lambda_{b_k, r_j}^{notify}, \quad (6)$$

where the switch first applies the dropping policy to each flow (i.e.,  $\Psi(r_j)$ ) according to the PrioDeX-computed function  $\Omega$ .

Multi-class priority queue  $Q_{x_k}^{out}$  separates the departure rates of each packet according to its serialized size and the switch's available bandwidth. Note that the assigned priority class affects the response time but not the departure rates of these packets. By Assumption 2, we have the service (i.e., transmission) rate of packets encapsulating events that match subscription  $r_j = (s_i, v_j, U_{r_j})$  from SDN switch  $x_k$  to subscriber  $s_i$  as

$$\mu_{x_k, r_j}^{out} = \frac{w_{x_k, s_i}}{G_{v_j}}. \quad (7)$$

We have the departure rate from  $Q_{x_k}^{out}$  as

$$\lambda_{x_k, r_j}^{out} = \lambda_{x_k, r_j}^{thru}.$$

We then apply Assumption 2 and  $\Gamma$  to packets departing switch queue  $Q_{x_k}^{out}$ . Considering packet error rates, we have the arrival rate of events at subscriber  $s_i$  matching subscription  $r_j = (s_i, v_j, U_{r_j})$  as

$$\Gamma(\lambda_{x_k, r_j, b_{s_i}, s_i}^{out}) = \lambda_{r_j}^{sub} = (1 - z_{b_{s_i}, s_i}) \lambda_{x_k, r_j}^{out}. \quad (8)$$

### 3.2 End-to-End Analytical Model

We now leverage our queueing network to derive theoretical performance results. This analysis, the accuracy of which we validate in Section 6.4, enables PrioDeX to tune the data exchange performance characteristics of end-to-end event response time and delivery success rate. To define  $\Delta_{r_j}$ , the end-to-end response time of events for subscription  $r_j$ , we define the propagation and

queueing delays at each layer. Note that the queueing delay in our model captures the real-world processing and network transmission delays.

To simplify our analysis, we exploit the local nature of our target scenario and consider only a single broker ( $b_k$ ) for the remainder of this section. Future work will explore relaxing this assumption and extending this analysis to include the more general scenario of a distributed broker network enabled by our queueing network model above. By the above assumption, we must define the per-subscription end-to-end response time metric denoted by  $\Delta_{r_j}$ , which is the expected delay from any such publisher to broker  $b_k$  considering both the queueing delay at the intermediate switch  $x_{p_i}$  and heterogenous propagation delays. Therefore, we have

$$\mathbb{E}[\Delta_{p_i, b_k}^{prop} + \Delta_{x_{p_i}}^{um}] = \sum_{\{p_i \in P_{b_k} : v_j \in V_{p_i}\}} \frac{\Delta_{p_i, b_k}^{prop} + \Delta_{x_{p_i}}^{um}}{|P(p_i, v_j)|}, \quad (9)$$

where  $\Delta_{p_i, b_k}^{prop}$  is the *propagation delay* (i.e., physical network latency) between a publisher  $p_i \in P_{b_k}$  and the broker  $b_k$ ,  $|P(p_i, v_j)|$  is the number of maximum publishers producing events on topic  $v_j$  (i.e.,  $|\{p_i \in P_{b_k} : v_j \in V_{p_i}\}|$ ), and  $\Delta_{x_{p_i}}^{um}$  is the transmission delay of packets passing through the switch. Then, by using Equation (9), we complete the calculation of  $\Delta_{r_j}$  as follows:

$$\Delta_{r_j} = \mathbb{E}[\Delta_{p_i, b_k}^{prop} + \Delta_{x_{p_i}}^{um}] + \Delta_{b_k} + \Delta_{b_k, s_i}^{prop} + \Delta_{x_{s_i}}, \quad (10)$$

where  $\Delta_{b_k}$  is the processing delay of events passing through  $b_k$ ,  $\Delta_{b_k, s_i}^{prop}$  is the *propagation delay* between the broker and the subscriber  $s_i$ , and  $\Delta_{x_{s_i}}$  is the transmission delay of packets passing through  $x_{s_i}$ . The average response time of Equation (10) includes queueing delays at each layer of PrioDeX. Based on the queueing network representing PrioDeX (see Figure 3), we identify the type of each queueing model and their arrival/processing/transmission rates.

At the data exchange layer we use M/M/1 queues. Based on standard solutions for M/M/1 queues (see page 62, Equation 2.26 in [27]), the time that an event remains in the system (i.e., queueing time + service time; also called average delay) is given by

$$\Delta_{Q_{mm1}}(\mu, \lambda) = \frac{1}{(\mu - \lambda)}. \quad (11)$$

At the network layer, we use three different types of queueing models: (1) the M/M/1 queue ( $Q_{x_k}^{in}$ ), (2) the multi-class queue ( $Q_{x_i}^{um}$ , unmanaged switch queue), and (3) the non-preemptive priority and multi-class queue ( $Q_{x_k}^{out}$ , SDN switch queue). Note that each class corresponds to the topic of an event encapsulated within a packet. Based on standard queueing theoretic solutions [37], the average delay for events matching a particular subscription  $r_k$  is given by

$$\Delta_{Q_{mcl}}(\mu, \lambda, r_k) = \frac{1}{\mu_{r_k} - \mu_{r_k} \sum_{r_j \in R} \lambda_{r_j} / \mu_{r_j}}, \quad (12)$$

where  $\lambda = \{\lambda_{r_j} : r_j \in R\}$  and  $\mu = \{\mu_{r_j} : r_j \in R\}$ .

Finally, the SDN switch is modeled using the non-preemptive priority and multi-class queue ( $Q_{x_k}$ ). Hence, the average delay of packets for  $r_k$  assigned with  $y_j$  is given by

$$\Delta_{Q_{mclpr}}(\mu, \lambda, r_k) = \frac{L_{r_k}(\lambda, \mu)}{\lambda_{r_k}}, \quad (13)$$

where  $\lambda = \{\lambda_{r_j} : r_j \in R\}$ ,  $\mu = \{\mu_{r_j} : r_j \in R\}$ , and  $L_{r_k}$  is the number of events matching subscription  $r_k$  with assigned priority  $y_c$  (where  $\Phi \circ \Psi(r_k) = y_c$ ) in the system (queue + server) of  $Q_{mclpr}$ . See Appendix A for our proof of Equation (13).

By relying on the above analytical models, we define the average delay of events for any subscription  $r_j$  at each node and layer of the PrioDeX queueing network according to Equation (10).

**Data Exchange.** At this layer, the average delay at  $b_k$  ( $\Delta_{b_k}$ ) is given by calculating the queueing delay of events matching  $r_j$  at both inbound ( $Q_{b_k}^{in}$ ) and outbound ( $Q_{b_k, s_i}^{out}$ ) queues, i.e.,  $\Delta_{b_k} = \Delta_{Q_{b_k}^{in}} + \Delta_{Q_{b_k, s_i}^{out}}$ . Both queues are of M/M/1 type. For  $Q_{b_k}^{in}$ , the incoming rate of events is  $\lambda_{b_k}^{in}$  and its service rate is  $\mu_{b_k}^{in}$ ; for  $Q_{b_k, s_i}^{out}$ , the incoming rate of events is  $\lambda_{b_k, s_i}^{thru}$  and the service rate is  $\mu_{b_k, r_j}^{out}$ . Hence, we apply Equation (11) to determine

$$\Delta_{b_k} = \Delta_{Q_{mm1}}(\mu_{b_k}^{in}, \lambda_{b_k}^{in}) + \Delta_{Q_{mm1}}(\mu_{b_k, r_j}^{out}, \lambda_{b_k, s_i}^{thru}). \quad (14)$$

**Network.** At this layer, the average delay ( $\Delta_{x_i}^{um}$ ) at the unmanaged switch  $x_i$  (*publishers-broker* link) is given by calculating the queueing delay of packets matching  $r_k$  at the multi-class  $Q_{x_i}^{um}$  queue. Hence, using the analytical model of Equation (12), such a delay is given by

$$\Delta_{x_i}^{um} = \Delta_{Q_{mcl}}(\{\mu_{x_i, v_j}^{um} : v_j \in V\}, \{\lambda_{p_i, v_j}^{pub} : p_i \in P_{x_i}, v_j \in V_{p_i}\}, r_k). \quad (15)$$

At the SDN switch  $x_k$  (*broker-subscribers* link), the average delay ( $\Delta_{x_k}$ ) is given by estimating the queueing delay for packets matching  $r_j$  at both the inbound ( $Q_{x_k}^{in}$ ) and outbound ( $Q_{x_k}^{out}$ ) queues, i.e.,  $\Delta_{x_k} = \Delta_{Q_{x_k}^{in}} + \Delta_{Q_{x_k}^{out}}$ . In the M/M/1 queue  $Q_{x_k}^{in}$ , packets arrive at a per-flow rate  $\lambda_{x_k, f_j}^{in}$  and are served with rate  $\mu_{x_k}^{in}$ . Hence, by applying Equation (11),  $\Delta_{Q_{x_k}^{in}} = \Delta_{Q_{mm1}}(\mu_{x_k}^{in}, \lambda_{x_k, f_j}^{in})$ .

The outbound queue ( $Q_{x_k}^{out}$ ), a multi-class and non-preemptive priority queue, has a per-subscription packet arrival rate  $\lambda_{x_k, r_j}^{thru}$ . Its service rates  $\mu_{x_k, r_j}^{out}$  capture the specific event/packet size of the corresponding  $r_k = (s_i, v_j, U_{r_j})$ . Hence, we apply Equation (13) to find

$$\Delta_{Q_{x_k}^{out}} = \Delta_{Q_{mclpr}}(\{\mu_{x_k, r_j}^{out} : r_j \in R_{x_k}\}, \{\lambda_{x_k, r_j}^{thru} : r_j \in R_{x_k}\}, r_k). \quad (16)$$

According to Figure 3 and Equation (10), to estimate the average response time for events matching subscription  $r_j$  of a single subscriber, we must consider the propagation and queueing delays for events passing through one broker and two switches. In particular, we have (1) one multi-class queue in the *publishers-broker* switch (15), (2) two M/M/1 queues in the broker (Equation (14)), and (3) one M/M/1 queue and one multi-priority queue in the *broker-subscriber* switch (Equations (11) and (16)). The time required to determine the average response time using Equation (10) is typically in the order of a few milliseconds. The time complexity of Equation (10) increases linearly as the number of switches increases (which is proportional to the queues in the network). This is because we must consider the queueing and propagation delays for the events passing via the additional *publisher-broker* and *broker-subscriber* switches.

## 4 DATA EXCHANGE CONFIGURATION ALGORITHMS

The core algorithms of PrioDeX leverage the above analytical model to configure the SDN-enabled data exchange. Considering current system state and information requirements, they assign priorities and preemptive drop rates to subscriptions (i.e., via  $\Phi \circ \Psi, \Omega$ ) in order to maximize subscriber-defined *utility functions*.

### 4.1 Utility Functions

To capture the relative value of information for different subscriptions, we propose using *utility functions*. Subscribers include a utility function with their subscriptions. Utility functions directly

affect the rate of successful event delivery  $\Xi_{r_j}$  and response time  $\Delta_{r_j}$ . The overall utility for a subscriber depends on each of its subscriptions' utilities and is defined as

$$U_{s_i} = \sum_{r_j \in R_{s_i}} U_{r_j}(\Xi_{r_j}). \quad (17)$$

Let  $\widehat{U}_{r_j}$  be a subscription's maximum achievable utility: delivering the maximum number of events under ideal network conditions (i.e., no loss, minimal latency, no other traffic).

To further capture the relative value of information between each subscriber, we consider an overall utility of all subscribing first responders. Each subscriber may define different utility functions to capture the fact that each of their needs vary (e.g., the IC may require more situational awareness than individual firefighters). We define the overall utility of the configuration for all subscribers as a sum over each individual subscriber's utility:

$$U = \sum_{s_i \in S} U_{s_i}. \quad (18)$$

To model heterogeneous information requirements in our experiments, we generate different utility functions for each subscription. We define the base utility function as

$$U_{r_j}(\Xi_{r_j}) = \alpha_{r_j} \log(1 + \Xi_{r_j}), \quad (19)$$

where the utility weight  $\alpha_{r_j}$  is varied for each subscription.

## 4.2 Priority Assignment Algorithm

PrioDeX leverages the above quantified utility metrics to assign priorities for each data flow in a manner that aims to maximize the overall system utility. We decouple the assignment of priorities from that of drop rates for two reasons. Prioritization ensures the most important events get through *first*, but it does not necessarily provide guarantees about *how much* data is delivered. Hence, we first assign the priorities and then optimally set the preemptive drop rates to tune bandwidth usage for the network flows in each priority class. Second, this decoupling allows us to explore different policies in these two spaces independently.

**Greedy Split.** Because the assignment of discrete priorities for maximizing the utility is non-trivial, we propose a heuristic to approximate a solution. It first ranks subscriptions according to their maximum utility  $\widehat{U}_{r_j}$  scaled by the corresponding required bandwidth. This measures *information value per unit bandwidth* and lets PrioDeX consider that some high-value subscriptions may consume a lot of network resources. We define this utility weight as follows:

$$\alpha_{r_j} = \frac{\widehat{U}_{r_j}}{G_{v_j} \lambda_{b_k, r_j}^{notify}}. \quad (20)$$

We provide a solution to the priority-assignment problem through the following greedy approach:

- (1) Sort the subscriptions  $r_j \in R_{s_i}$  by Equation (20).
- (2) Split this list into  $|F_{s_i}|$  sub-lists of approximately equal size.
- (3) Assign  $\Psi(r_j) = F_{s_i}(k)$  for each  $r_j \in$  sub-list number  $k$ .
- (4) Split the list of flows  $F_{s_i} \forall s_i \in S$  into approximately  $|Y|$  sub-lists of approximately equal size.
- (5) Assign  $\Phi(f_j) = y_k$  for each  $f_j \in$  sub-list number  $k$ .

Note that this splitting up of lists handles unequally sized splits by preferring higher priorities first.

**Cluster Split.** We also propose the following cluster approach. It consists of the same first three steps as the greedy approach, then:

- (4) Split the list of flows  $F_{s_i} \forall s_i \in S$  into  $|Y|$  sub-groups leveraging the  $k$ -means clustering method and the following utility weight (per network flow) to evaluate each data point:

$$\alpha_{f_j} = \sum_{r_j \in f_j} \alpha_{r_j}. \quad (21)$$

- (5) Assign  $\Phi(f_j) = y_k$  for each  $f_j$  that belongs to the group with priority  $y_k$ .

The main difference between the two approaches is that the greedy split has fixed group size, while the cluster split groups different network flows depending only on their information value (i.e., Equation (21)). Both priority assignments ensure delivery of the highest-priority events if possible. However, an overloaded system will fill switch buffers and lead to high delay and loss of lower-priority events. Hence, we apply preemptive drop rates to avoid such a case.

### 4.3 Ensuring Queue Stability via Preemptive Drop Rates

Given a priority assignment, subscription utility functions, and the current network state (e.g., bandwidth constraints), PrioDeX further fine-tunes the subscriptions' successful notification rate  $\Xi_{r_j}$  by applying a packet dropping policy. This improves the overall utility of the system's configuration by allocating available bandwidth to the network flows. In addition, this bandwidth allocation also ensures *queue stability* throughout the network. That is, if packets arrive at the switches' inbound queues too quickly, the forwarding queues will grow in size until the buffers fill up and packets are dropped. To prevent the dropping of high-value events, PrioDeX preemptively drops lower-priority packets. The algorithms presented in this section determine the probability with which packets of each network flow should be dropped ( $\Omega(f_j)$ ). Here, the goal is to satisfy the situational awareness requirements and the conditions necessary for our analytical model's results to be accurate, while also ensuring queue stability and improving the overall system performance.

Let  $\rho_Q = \frac{\lambda}{\mu}$  be the server utilization (i.e., the probability that the server is busy) of the corresponding queue (e.g.,  $Q_{x_k}^{out}$ ). By [27], the system remains *unsaturated* (i.e., queue stability is ensured) when  $\rho_Q < 1$ . For PrioDeX's M/M/1 queues (i.e.,  $Q_{b_k}^{in}$ ,  $Q_{b_k, s_i}^{out}$ ,  $Q_{x_k}^{in}$ ), we define  $\rho_{Q_{b_k}^{in}} = \frac{\lambda_{b_k}^{in}}{\mu_{b_k}^{in}}$ ,  $\rho_{Q_{b_k, s_i}^{out}} = \frac{\lambda_{b_k, s_i}^{thru}}{\mu_{b_k, r_j}^{out}}$ , and  $\rho_{Q_{x_k}^{in}} = \frac{\lambda_{x_k, f_j}^{in}}{\mu_{x_k}^{in}}$ . PrioDeX's multi-class queues  $Q_{x_i}^{um}$  and  $Q_{x_k}^{out}$  have per-topic and per-subscription arrival and service rates, respectively. Thus, we can estimate the per-class server utilization as well as the overall server utilization for each queue as

$$\rho_{Q_{x_i}^{um}} = \sum_{P_{x_i}} \sum_{v_j \in V_{P_i}} \frac{\lambda_{p_i, v_j}^{pub}}{\mu_{x_i, v_j}^{um}}. \quad (22)$$

$$\rho_{Q_{x_k}^{out}} = \sum_{r_j \in R_{x_k}} \frac{\lambda_{x_k, r_j}^{thru}}{\mu_{x_k, r_j}^{out}} \quad (23)$$

To improve the successful delivery rate while ensuring queue stability, we propose several algorithms of increasing sophistication below. Note that these algorithmic formulations currently only consider the outbound queue of the SDN switches for this constraint, as tuning the drop rates only affects  $\rho_{Q_{x_k}^{out}}$ . Also recall that this queue captures the bottleneck bandwidth of the network route from broker to subscriber. Future work will explore simultaneously balancing the load across data exchange brokers to also ensure stability of their queues within our model.



Each algorithm makes use of a parameter  $\tilde{\rho}$  in tuning the system's tolerance to approaching (but never exceeding) the queue saturation point of  $\rho_{Q_{x_k}^{out}} = 1$ . Clearly, to satisfy the strict inequality  $\rho_{Q_{x_k}^{out}} < 1$ , we must have  $\tilde{\rho} > 0$ . Increasing  $\tilde{\rho}$  provides ample buffer within the SDN switch queues for resilience against temporary notification rate spikes that might otherwise lead to queue saturation. However, even if this condition is just barely satisfied (e.g.,  $\tilde{\rho} = 10^{-10}$ ), queues will still grow quite large and thereby cause high delay. Therefore, the following drop rate policies set  $\Omega$  such that

$$\rho_{Q_{x_k}^{out}} = 1 - \tilde{\rho}. \quad (24)$$

*Flat* drop rates: this simple naive policy sets all drop rates equal to satisfy Equation (24) by solving Equation (23) for a parameter  $\beta$  such that

$$\Omega(f_j) = \beta. \quad (25)$$

*Linear* drop rates: this value-aware policy sets the drop rates for each network flow according to its assigned priority level. It solves Equation (23) for a parameter  $\beta$  that satisfies Equation (24) with drop rates set to

$$\Omega(f_j) = \beta \Phi(f_j). \quad (26)$$

*Exponential* drop rates: similar to *Linear*, this policy sets drop rates according to priority level. It solves Equation (23) for a parameter  $\beta$  that satisfies Equation (24) with drop rates set to

$$\Omega(f_j) = 1 - \beta^{-\Phi(f_j)}. \quad (27)$$

To compute the parameter  $\beta$  in Equations (25), (26), and (27), we use the analytical solutions presented in Appendix B, i.e., Equation (47) for Flat, Equation (48) for Linear, and Equation (54) for Exponential drop rates.

*Optimized* drop rates: the following convex optimization formulation assigns drop rates to maximize overall utility (see Equation (18)). Given the assigned priorities to network flows as input, PrioDeX assigns drop rates by solving the following:

$$\begin{aligned} & \text{maximize} && U \\ & \text{subject to} && \Omega(f_j) \in [0, 1], \forall f_j \in F \\ & && \rho_{Q_{x_k}^{out}} \leq 1 - \tilde{\rho}, \forall x_k \in X \end{aligned} \quad (28)$$

Note that the first constraint defines the feasible domain of assigned drop rates for each network flow  $f_j$ , and the second constraint ensures that available bandwidth constraints are met (i.e., queue stability) according to the  $\tilde{\rho}$  parameter for each SDN switch  $x_k$ . As long as the chosen utility functions are concave (e.g., logarithm such as Equation (19)), then Equation (28) can be expressed as a convex optimization problem and efficiently solved. We used CVXPY [2, 22] that solves convex optimization problems to assign drop rates to PrioDeX network flows.

## 5 PROTOTYPE IMPLEMENTATION

We now present the PrioDeX prototype, which implements the cross-layer architecture (Figure 1 in Section 2), the underpinning theoretical model (Section 3), and the algorithms (Section 4). The main software components developed and technologies used are shown in Figure 4. Among these components, the *PrioDeX Coordinator Service* (PCS) is a part of the data exchange layer and provides configuration parameters to the network infrastructure through SDN. It runs the algorithms to compute priorities and drop rate policies, which are enforced via an SDN controller that configures SDN switches. The PrioDeX source code and the detailed documentation are provided at <https://github.com/boulouk/priodex>.

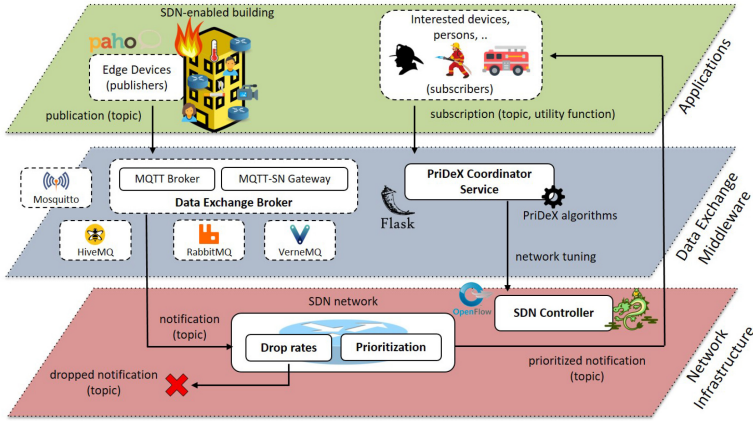


Fig. 4. The PrioDeX cross-layer prototype implementation.

### 5.1 Cross-Layer Prototype Implementation

**Application Layer.** The MQTT Paho library [20] is used from any *PrioDeX publisher* to create an MQTT connection with the data exchange broker. Publishers produce events according to one of two methods: (1) by using probability distributions (e.g., Exponential or Deterministic) or (2) by using traces created with data coming from real IoT deployments. Subscribers connect to the broker by specifying a topic name and its corresponding utility function to receive relevant events. Each subscriber establishes multiple MQTT-SN connections to the broker with a client library [19]; these allow the network layer to distinguish between different event types (e.g., more/less relevant). Hence, different queueing priority disciplines and event dropping policies can be applied as indicated by the PCS. To establish the subscribers' connections, MQTT-SN is used instead of MQTT because it is implemented over UDP rather than TCP. TCP's re-transmission mechanism interferes with our preemptive packet dropping approach that tolerates losses of less important data due to the constrained bandwidth. However, since UDP does not support fragmentation and reassembly of application-layer events, we assume that events are never fragmented. We additionally limit the event size to 256 bytes (before packet headers) due to the limitations of the MQTT-SN library. The PCS workflow with respect to subscribers consists of three steps. First, the subscribers coordinate with the PCS as depicted in Figure 5. Then, the PCS determines the port number of the connection to be used for each subscription. Finally, subscribers open the connections specified by the PCS to the broker and subscribe to each topic through its corresponding connection.

**Data Exchange Layer.** In this layer, we follow the publish/subscribe paradigm for event dissemination using the following components:

*Data Exchange Broker.* Publishers and subscribers interact with each other via an MQTT-based [43] message broker. While PrioDeX supports any MQTT broker implementation (e.g., EMQ, RabbitMQ), we deployed Moquette [16] because it is lightweight, embeddable, open source, and easy to configure. We also deploy an MQTT-SN gateway [26, 34] co-located with the MQTT broker to translate events from MQTT over TCP (publishers' protocol) to MQTT-SN over UDP (subscribers' protocol).

*PrioDeX Coordinator Service.* The PCS is the "brain" of PrioDeX. It manages user subscriptions by assigning priorities and drop rates as described in Section 4. We implemented the PCS as a REST service using the Python library Flask [25]. Subscribers indicate their topics of interest and the corresponding utility functions to the PCS through an HTTP request (i.e., *subscription intent*). Then, the PCS computes priorities and drop rates for the subscriber's network flows, provides to

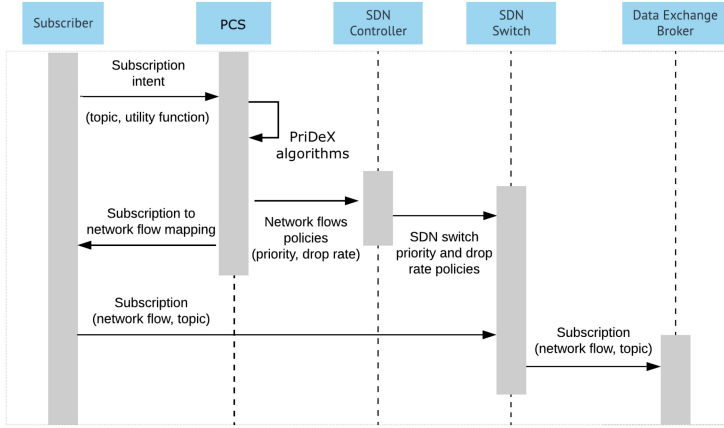


Fig. 5. Subscribers and PCS interaction workflow.

the subscribers the mapping of subscriptions to connections (i.e., network flows), and configures the network layer to enforce the assignment of priorities and dropping policies to network flows.

**Network Layer.** The network layer enforces the event prioritization and drop rate policies indicated by the PCS using the OpenFlow [40] protocol. This is performed from the Ryu SDN controller that configures the SDN switches via the following SDN network applications:

- (1) The *Topology Application* monitors network traffic to create an internal graph representation (using the NetworkX library [28]) of the network topology. The topology is used to route packets from source to destination.
- (2) The *PrioDeX Flow Application* populates the switches' flow and group tables. This application implements different prioritization policies and thus can be used to tune the networking infrastructure in the case of an emergency (e.g., earthquake, water contamination, etc.).

Based on the scenario described in Section 2, we implement the FireDeX flow application to enforce priority and drop rate policies in the switches' flows and group tables. To identify a subscriber's data flows, the FireDeX flow application matches the packet's header with the network flow information received by the PCS, i.e., the subscriber's IP address and the connection's/network flow's transport layer port number. To set the drop rates, we use the *SELECT* option of the OpenFlow *group tables*. In particular, we set the forwarding and drop probabilities by defining two weighted "buckets" (i.e., options of a group rule); the first bucket represents the actions taken to forward a packet normally and the second bucket represents the actions taken to drop the packet. For example, the rules shown in Listing 1 match packets for the subscriber with IP address 10.0.0.1 and an MQTT-SN connection on UDP port 8888. The forwarding bucket applies priority class 2 (i.e., queue number), while the drop bucket applies a 10% drop rate.

```

FLOW TABLE RULE: ip_address = 10.0.0.1, udp_port = 8888,
    action = (group_idenfier, 1)
GROUP TABLE RULE: group_idenfier = 1,
    buckets [
        (weight = 90, action = (queue = 2, output_port = 3)),
        (weight = 10, action = drop)
    ]
  
```

Listing 1. Example rules in flow and group tables.

We configure the priority queues in the switches via Linux TC [5] because OpenFlow does not provide an API to support this. Furthermore, PrioDeX must enforce a random per-packet selection of the buckets option to apply the drop rate rather than the typical approach of hashing packet header fields. This is implemented by leveraging a modified **Open vSwitch (OVS)** version [45].

## 5.2 Implementation Challenges

We faced the following challenges and overcame them while implementing the PrioDeX prototype:

- **Differentiating events** at the network layer for policy enforcement. We used SDN network flows to distinguish subscriptions served by different connections. This was necessary because the OVS switches can only inspect a packet's header (i.e., OSI Layers 2-4), and not the payload. Hence, we needed to bring the concept of subscription topics from OSI Layer 7 (app layer) down to OSI Layers 2-4 for our in-network policy enforcement.
- **Enforcing packet drop rates via SDN** required us to use the modified OVS version described above. As a result, we implemented the drop rate policies through a weighted per-packet selection of bucket options (i.e., drop vs. forward with priority).
- **SDN controller choice:** We moved from ONOS to Ryu because the former does not support group rules for specifying the enqueue action as required by our flow rules shown in Listing 1.
- **The UDP protocol** was used over the TCP protocol when subscribers receive events. Applying drop policies to events over a TCP connection triggers its re-transmission mechanism because the sender does not receive an acknowledgment when the corresponding event is dropped. Hence, subscribers employ the MQTT-SN (over UDP) protocol.
- **Clock-synchronization issues** between publishers and subscribers for gathering accurate performance metrics. To overcome this challenge we run our experiments on a single machine using Mininet—all applications shared the same system clock.
- **Our experimental network topology** requires additional “dummy” switches for constructing priority queues that are shared across all subscribers. This is due to the fact that each host has its own Ethernet interface connecting it with a switch. Therefore, enqueueing prioritized events may result in one set of priority queues for each subscriber rather than a shared queue across all subscribers as our version accomplishes.

Despite the fact that we have tackled the above challenges, the MQTT-SN control events (e.g., subscription, unsubscription, ACK) are sent to the same UDP port (or network flow) in which we apply the drop rate policies. Therefore, some of the control events may be dropped. To better understand the situation, let us consider the events exchanged between a broker and a subscriber through the SDN infrastructure. The first event sent from the broker to the subscriber (i.e., the subscription's acknowledgment) triggers the creation of the flow/group rules (see Listing 1) associated with the network flow to which the subscription belongs. Subsequently, when the subscriber subscribes to another topic on the same network flow, the second subscription's acknowledgment may be dropped because of the drop rate policy applied. This can delay the subscription process considerably if the assigned drop rate to that network flow is high. One possible solution to overcome the aforementioned problem requires changing the interaction protocol between subscribers and the PCS. In particular, each subscriber notifies the PCS of its intention to subscribe/unsubscribe to/from a topic. Then, the PCS temporarily disables the priority and drop rate policies to allow the subscriber to use its network flows and modify its subscriptions. Once the subscriber finishes the subscribing/unsubscribing process, the PCS instructs the SDN controller to re-apply the policies. Note that applying this solution enables us to support policy reconfiguration and manage dynamic conditions (e.g., subscriber churn).

Table 2. Default Parameters for Our Experimental Configurations

Network Layer			Data Exchange Layer			
Parameter	Sim	Prototype		Sim	Sim	Prototype
#subscribers ( $ S $ )	10	10	Parameter	Tel. data	Async. events	Async. events
#publishers ( $ P $ )	160	10	#topics ( $ V $ )	140	60	7
#flows ( $ F_{s_i} $ )	9	7	pub rate ( $\lambda_{p_i, v_j}^{pub}$ )	$6 \in [4,7]$	$4 \in [3,5]$	1
#priorities ( $ Y $ )	9	7	event size ( $G_{v_j}$ )	$110 \in [90,500]$	$800 \in [500,1100]$	100
bandwidth ( $w_{s_i}$ )	80 Mbps	320 Kbps	#subscriptions ( $ R_{s_i} $ )	70	42	70
$\rho$ tolerance ( $\bar{\rho}$ )	0.1	0.1	utility weight ( $\alpha_{r_j}$ )	$2 \in [0.01,2]$	$1 \in [0.1,4]$	$5 \in [0.01,100]$

## 6 EXPERIMENTAL RESULTS

PrioDeX uses the analytical model given in Section 3.2 to estimate end-to-end response times and success rates for event notifications to interested subscribers. We use this model to evaluate the PrioDeX approach for a given configuration. In particular, we compare our approach's efficacy with that of an unprioritized system and evaluate the trade-off between response times and success rates. We use our proposed *greedy-split* priority-assignment algorithm and the *exponential* drop rate policy. Subsequently, we utilize the analytical model to compare the ability of different algorithms to maximize the overall value of information captured. Then, we validate the PrioDeX theoretical model, which includes a multi-class priority queue that represents the prioritization, dropping, and transmission of packets in the SDN network infrastructure. We developed an experimental framework that uses both an extended open source queueing simulator and the implemented prototype to represent our real-world scenario. We compare the subscribers' end-to-end response times given by the analytical model with those given by the simulation and the prototype. Note that we omit trivial results for validating success rates. In order to improve the figures' legibility, we did not include error bars in our plots as the simulation results' confidence intervals are very small (less than two orders of magnitude from the corresponding mean values presented in the plots). We further validate the model's accuracy under larger numbers of subscribers.

### 6.1 Experimental Setup

We developed a Python-based experimental framework that models the real-world scenario described in Section 2 to provide input data for our experiments. The inputs to this framework are the parameters given in Table 2, which will generate configurations for every publisher, subscriber, broker, and the network. We consider two classes of topics that represent events produced from publishers: (1) sensor telemetry readings published periodically from FFs or IoT devices deployed in the building and (2) asynchronously published notifications that indicate real-world phenomena detected from analysis of raw sensor readings. Subscribers correspond to stakeholders such as the IC, FFs, and building occupants that subscribe to situational awareness information with varying importance (e.g., "smoke" > "water pressure" for FFs). The parameters in Table 2 represent the average expected value of an exponential distribution. For example, a publication rate or packet size is selected from the given range of values. The actual topics published and subscribed are chosen uniformly at random from those available. Note that we bound these values to maintain realistic parameters by reproducing a new one if it lies outside the given range. We parameterize a saturated system with high publication rates, overloaded buffers, and constrained bandwidth capacity.

PrioDeX ensures low response times and high delivery success rates by using the model presented in Section 3, which generically captures a wide range of scenarios and system

configurations. To reduce the number of variables we explore in our experiments, we only simulate a single (i.e., last-hop) SDN switch between the broker and subscribers. Recall that this represents the bottleneck bandwidth that may cause high transmission delays. Also note that propagation delay and error rates are typically modeled as constant values. Hence, we ignore them for these experiments to focus on analyzing the variable delays that our model aims to capture.

**Queueing Network Simulator.** After generating these configuration parameters for a single instance of a scenario, our Python-based framework feeds them into a simulator. That is, these parameters correspond to the expected values of the probability distributions from which the simulator draws the actual individual publications' arrival times and packet sizes. Note that we use exponential distributions in order to maintain our assumption of Poisson arrival/service rates. This simulator extends JINQS [24], a Java simulation library for multi-class queueing networks. JINQS provides a suite of primitives that allow developers to rapidly build simulations for a wide range of queueing networks. We leverage this power and extend JINQS in order to (1) represent the queueing network introduced in Figure 3, (2) implement our new multi-class and non-preemptive priority queueing model, and (3) simulate pub/sub interactions using a set of configuration parameters provided by our Python-based framework. To evaluate PrioDeX, we generate parameters and record the average of 10 runs for each configuration. Each run generates approximately 6,500,000 publications in order to accurately calculate per-subscription response times and success rates. Furthermore, we consider nine priority classes due to practical limitations of many existing network traffic and data exchange management systems. For example, Linux TC [5] and AMQP 0.9.1 [1] only support 8 and 10 priority queues (one queue per priority class), respectively.

**Prototype Emulator.** Instead of feeding the generated configuration parameters into a simulator, we use our prototype that implements a pub/sub system with an emulated network using Mininet [41]. This uses OVS [57] to create a virtual network topology of SDN-enabled switches (in a real Linux networking stack) with realistic delays, bandwidth limits, and link loss rates. It connects these switches together as well as to virtual hosts, which are implemented as network namespace-isolated processes. Then, we run our prototype implementation described in Section 5. OVS switches connect via the SDN southbound protocol OpenFlow [40] to the distributed SDN controller platform Ryu [21] running on the same machine. The publisher/subscriber hosts produce output files from which we calculate the experimental results. The experimental framework configures the managed SDN switches to create a number of priority queues. Because OpenFlow does not support a unified API for creating these queues, we currently perform this using Linux TC [5] that supports up to eight queues. However, the highest-priority queue is used to send the default traffic. Since this would affect the results for that priority queue, we route default traffic through the highest-priority queue and prioritized traffic through the remaining queues. This limits the number of priority queues that we can actually use to prioritize the network traffic to seven.

## 6.2 Evaluating the PrioDeX Approach

We now compare our approach's efficacy with that of an unprioritized system and a system without preemptive packet drops; this evaluates the trade-off between response times and success rates. We will first discuss the concept of network switch buffers and their limited capacity within the context of PrioDeX in more detail. Recall from Section 4.3 that we apply drop rates in order to prevent these buffers from filling up, which leads to high queuing delays as well as dropped high-priority packets. Recall also from that discussion that we tune the parameter  $\tilde{\rho}$  in order to keep these buffers from growing indefinitely. We set  $\tilde{\rho} = 0.1$  to prevent our system from being saturated while also ensuring low response times and high delivery success rates. This is used throughout our experiments and adopted as the default in our prototype.



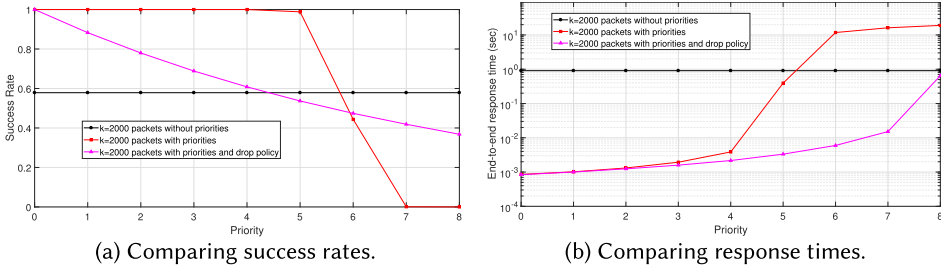


Fig. 6. Success rates vs. response times for no priorities, priorities only, and an added drop policy.

While  $\tilde{\rho}$  keeps buffers at a finite size, we must also consider real-world constraints of physical switches: limited buffer capacity. Hence, we now consider applying a buffer capacity of  $k$  packets for the simulator's SDN switch outbound queue. This models a real-world switch dropping packet when the buffer fills up. It drops the incoming packet if its priority class is less than or equal to the lowest-priority class of those in the buffer. Otherwise, it evicts lower-priority packets to make space in the buffer. We set  $k = 2,000$  based on reported buffer sizes of various real-world SDN switches [48]. Additionally, we configure this queue in three different ways:

- (i) No priority assignment or drop policy features (i.e., a simple switch that treats all packets identically and only drops incoming ones when its buffer has filled up)
- (ii) Priority assignment only (i.e., no drop rates)
- (iii) Both priorities and drop rates (i.e., the complete PrioDeX approach)

These experiments use the parameters given in Table 2. Figures 6(a) and 6(b) show the success rates and end-to-end response times for each priority class, respectively. Note that priority classes are represented numerically (x-axis), where a lower number has higher priority. Configuration (i) results in a 58% success rate and 0.9 sec response time regardless of assigned priority. Configuration (ii) uses the *greedy-split* algorithm for assigning priorities to each network flow (i.e., to their contained subscriptions and associated packets). The results demonstrate that priority assignment significantly improves both response times and success rates for higher-priority subscriptions. In particular, subscriptions with priorities 0-4 have a response time less than 4 ms and 100% success rate. However, the success rate of lower-priority subscriptions suddenly decreases while the response time increases to the order of seconds. For instance, those with priority 6 have a 45% success rate and 11 sec response time. Additionally, subscriptions with priorities 7 and 8 have very low success rates (almost all packets dropped), while those events successfully delivered have a high response time of 20 sec.

The results for configuration (iii) demonstrate how applying drop rates further improves response time to the order of milliseconds. Specifically, priority 0-6 subscriptions have a response time under 6 ms, whereas those with priority 8 have a response time of 647 ms. The most important subscriptions (i.e., priority 0) have a 100% success rate. The PrioDeX *exponential* drop rate policy smoothly decreases the success rate proportional to the priority level. This demonstrates our approach to controlling the success rate based on a subscriber's available bandwidth in order to achieve lower response times. Next, we compare the level of overall utility achieved using the various priority assignment and drop rate algorithms that base their configurations on the subscriptions' utility functions.

### 6.3 Comparing Prioritization and Drop Rate Algorithms for Situational Awareness

We now compare our proposed priority-assignment algorithms' ability to group similar network flows into priority classes. Each group contains one or more network flows with the same priority

class. We define the *within-class* (*wtc*) and *between-class* (*btc*) variances denoted by  $\sigma_{wtc}^2$  and  $\sigma_{btc}^2$ , respectively, in order to measure the similarity/dissimilarity of the grouped network flows. We then compare our proposed algorithms' ability to maximize the value of information captured for a given configuration. We measure this as the *achieved utility rate*: the ratio of a subscription's max utility ( $\widehat{U}_{r_j}$ ) to achieved utility, averaged over all subscriptions.

**6.3.1 Priority Algorithms Comparison.** We first introduce the metrics used to compare our algorithms. The *within-class* variance per priority represents the spread of each network flow utility (see Equation (21)) with respect to the mean utility value of the grouped network flows with the same priority class. This is defined as follows:

$$\sigma_{y_k}^2 = \sum_{f_j: \Phi(f_j)=y_k} (\alpha_{f_j} - E[\alpha_{f_j} : \Phi(f_j) = y_k])^2 n_{y_k}, \quad (29)$$

where  $E[\alpha_{f_j} : \Phi(f_j) = y_k]$  is the average value of network flow utilities with the same  $y_k$  and  $n_{y_k} = \frac{|f_j \in F: \Phi(f_j)=y_k|}{|F|}$  is the number of network flows with the same  $y_k$  divided to the overall number of network flows. We then estimate the total within-class variance for all priority classes as follows:

$$\sigma_{wtc}^2 = \sum_{y_k \in Y} \sigma_{y_k}^2. \quad (30)$$

The second metric, *between-class* variance, represents the spread of the mean utility value of the grouped network flows with the same priority class with respect to the mean utility value of all network flows. This is defined as follows:

$$\sigma_{btc}^2 = \sum_{y_k \in Y} (E[\alpha_{f_j} : f_j \in F] - E[\alpha_{f_j} : \Phi(f_j) = y_k])^2 n_{y_k}, \quad (31)$$

where  $E[\alpha_{f_j} : f_j \in F]$  is the average utility value of all network flows.

To summarize, within-class variance measures the similarity/dissimilarity of each network flow in a group (with the same priority class), while between-class variance measures the similarity/dissimilarity of each group of network flows (grouped per priority class) for all priority classes. The main purpose of our approach is to assign similar network flows in a group; hence, we aim to minimize the within-class variance. On the other hand, we want dissimilar groups of network flows, and thus, we aim to maximize the between-class variance.

Figures 7(a), 7(b), and 7(c) show the measured variances according to assigned number of priority classes where priorities were assigned using the random, the greedy-split, and the cluster-split algorithms, respectively. In our experimental setup, we consider 70 network flows assigned with random values. We run each experiment 100,000 times and average across the results. As expected, the random algorithm demonstrates the worst behavior (i.e., within-class variance values are very high) than the other algorithms for all priorities. This is because it does not consider the utility values ( $\alpha_{f_j}$ ) of network flows. By leveraging the networking characteristics in the network utility definition (see Equation (21)) when assigning priorities using the greedy and cluster approaches, the within-class variance decreases very rapidly.

Although these two approaches perform very similar with regard to their ability to grouping similar utility values of network flows, their execution time is different. As shown in Figure 7(d), cluster one becomes significantly less efficient as the number of priority classes increases.

**6.3.2 Drop Rate Algorithms Comparison.** We compare the four drop-rate-assignment algorithms outlined in Section 4.3 (Flat, Linear, Exponential, Optimized). Note that these algorithms assume that priority classes have been already assigned to network flows; we leverage the greedy-split algorithm, which is the most efficient. To demonstrate PrioDeX's ability to improve situational

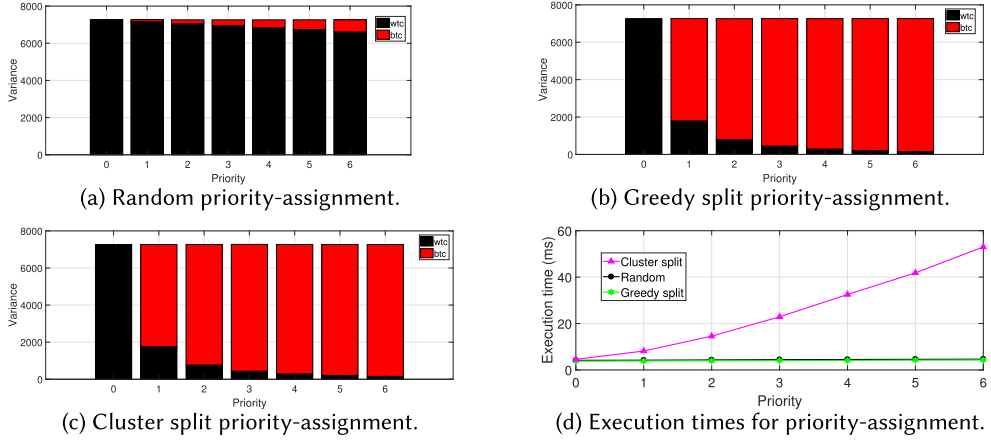


Fig. 7. Comparing priority-assignment algorithm policies using wtc/btc variances and their execution time.

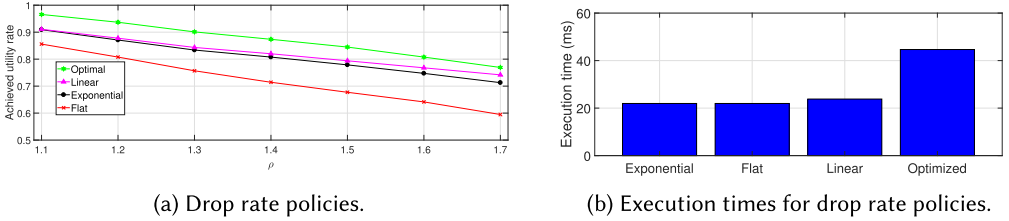


Fig. 8. Comparing drop rate policies and their execution time.

awareness for heterogeneous data and information requirements, our experiments varied the load of the network ( $\rho$ ) by increasing the number of subscriptions. The x-axis in Figure 8(a) shows the different  $\rho$  values used throughout the experiments, while the y-axis represents the achieved utility rate. Figure 8(b) shows the execution time of each algorithm with  $\rho = 1.7$  (i.e., overloaded network conditions). As shown in Figures 8(a) and 8(b), while the optimization-based algorithm captures the highest overall utility rate (i.e., it maximizes situational awareness), it is the least efficient in terms of execution time. The linear and exponential algorithms demonstrate similar utility rates and execution times.

#### 6.4 Validating the PrioDeX Models

To prove the accuracy of the theoretical analysis (presented in Section 3.2), we now compare the estimated performance metrics with those from the simulator and the prototype implementation.

**6.4.1 Simulation-Based Validation.** Recall that the SDN switch's outbound queue (see Figure 3) captures the bottleneck bandwidth of the network route from broker to subscriber. PrioDeX uses the corresponding server utilization ( $\rho_{Q_{x_k}^{out}}$ ) to decide the bandwidth tuning by assigning drop rates. Therefore, we parameterize the simulated queueing network to vary the traffic load: (a) medium-load conditions ( $\rho_{Q_{x_k}^{out}} = 0.6$ ), (b) high-load conditions (i.e., close to saturation:  $\rho_{Q_{x_k}^{out}} = 0.95$ ); and (c) overloaded conditions (i.e., saturated:  $\rho_{Q_{x_k}^{out}} = 1.7$ ). Note that the saturated case (third) corresponds to the default parameters in Table 2. To achieve the medium-load (first) and high-load (second) cases, we set the number of subscriptions for each topic class respectively: (i) 21,15 and (ii) 42,24.

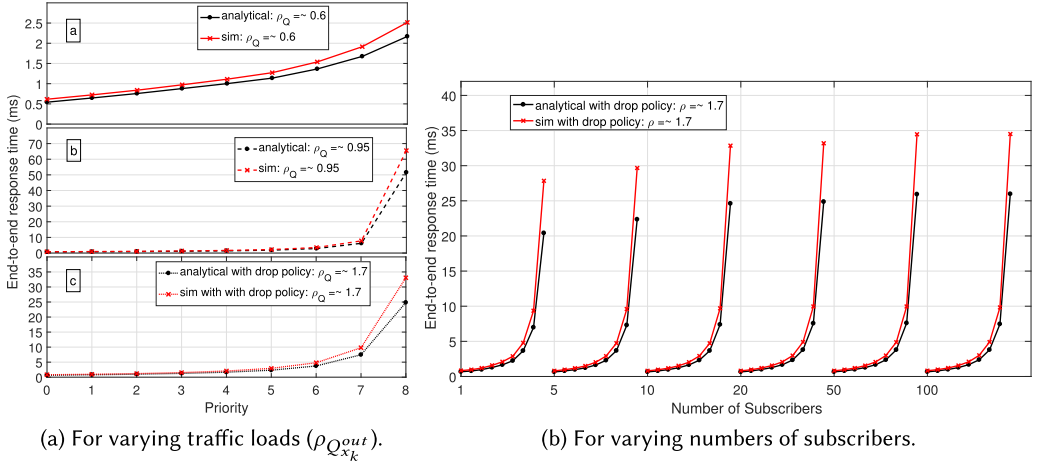


Fig. 9. Analytical vs. simulation end-to-end response times.

Figure 9(a) shows the results of these experiments according to assigned number of priority classes and averaged across all topics, subscribers, and so forth. Comparing the curves of both the simulated measurements and the analytical results obtained by Equation (10) reveals our model's high accuracy. We notice small differences for events with lower priority levels. In particular, note priority level 8's differences: 0.35 ms in Figure 9(aa), 13.98 ms in Figure 9(ab), and 8.24 ms in Figure 9(ac). Because the system approaches saturation in Figures 9(ab) and 9(ac), we deem these results acceptable. In Figure 9(ac), PrioDeX uses our drop policy mechanism to drop packets at the SDN switch and return the system to below saturation (i.e.,  $\rho_{Q_k^{out}} = 0.9$  by using  $\hat{\rho} = 0.1$ ).

We now validate our analytical model's accuracy under varying numbers of subscribers:  $|S| = 1, 10, 20, 50, 100$ . Among the simulation parameters defined in Table 2, we select to scale up the number of subscribers because this significantly increases the system traffic load; the broker must duplicate events to match the increased number of subscriptions. Additionally, the prioritization and dropping mechanisms are enforced at the broker-subscriber link and thus are highly important to extensively evaluate this part of our system. To maintain the same degree of system saturation (i.e.,  $\rho_{Q_k^{out}} = 1.7$ ), we increase the simulation bandwidth proportional to the number of subscribers:  $w_{x_k, s_i} = 8Mbps$ . We keep all other simulation parameters according to Table 2. According to these parameters, we measure the simulated mean response times and plot them vs. those calculated using Equation (10) in Figure 9(b). Note the curve for each number of subscribers that shows response time increasing with the priority class. From this comparison, we see that the absolute deviation between the two curves does not exceed 10 ms across all priority levels. Therefore, our model remains accurate even with higher numbers of subscribers.

**6.4.2 Prototype-Based Validation.** We further validate our analytical model by comparing its estimated response times with the ones derived from a prototype implementation configured under realistic settings. Similar to the simulation-based validation, we first show the results obtained for different traffic loads and then scale up the number of subscribers. We modify the experiments' configuration parameters used in the simulation (see Table 2, Prototype column) to overcome practical issues imposed by Mininet and challenges described in Section 5.2. In particular, we use one subscription per network flow and we reduce the number of priority classes to seven because of Linux TC limitations. Note that we use a fixed publication rate and event size; if we vary the publication rate and event size, it takes longer to converge to the expected values of the probability

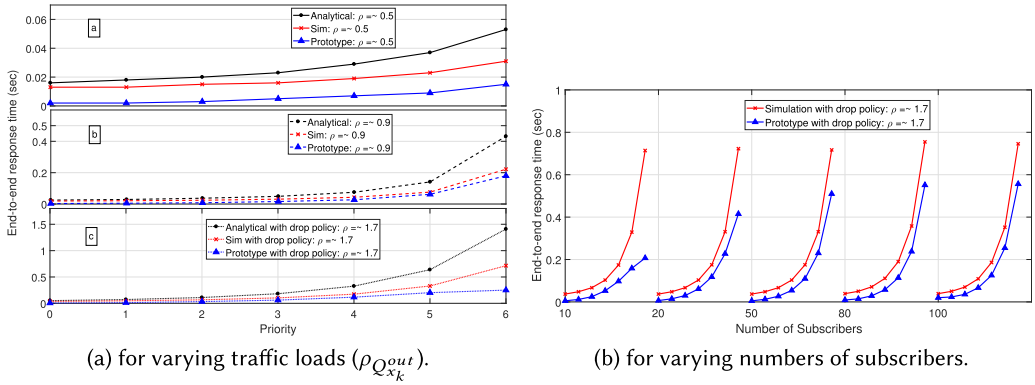


Fig. 10. Analytical vs. simulation vs. prototype end-to-end response times.

distributions and thus the execution time of each real experiment. Because the analytical model assumes exponential distributions, we also calculate response times using the queueing simulator with realistic parameters introduced from the prototype implementation and its emulated network through Mininet. In particular, we only use asynchronously published events and we set the SDN output queue's service rate as deterministic rather than exponential. This represents the concept of a switch's bandwidth, which essentially has a constant service rate measured in bytes/second.

Again, we parameterize and deploy PrioDeX under different network load conditions: (a) medium load ( $\rho_{Q_k^{out}} = 0.5$ ); (b) high load ( $\rho_{Q_k^{out}} = 0.9$ ); and (c) overloaded ( $\rho_{Q_k^{out}} = 1.7$ ). Figure 10(a) shows the end-to-end response times obtained using 10 subscribers and the aforementioned load conditions; these closely match the response times calculated from both the simulation and the analytical model. The differences observed are due to the following reasons: (1) the analytical model assumes exponential service rates while the simulation applies deterministic service rates to match the constant service rate (bytes/second) in the switch of the prototype, and (2) Mininet lacks the ability to emulate proper queueing delay when transmitting packets and thus there is a significant difference between the response times of the simulation and the prototype. This is because Linux TC (used by Mininet to apply queueing disciplines to any network interface) can emulate bandwidth limitations, packet loss, and network delay. The bandwidth limitation constrains the volume of traffic (i.e., number of bytes) that can be sent per unit of time. However, it does not simulate the actual packet transmission delay ( $\frac{G_{vj}}{w_{si}}$ ) due to the available bandwidth. Hence, Linux TC sends packets at the same speed regardless of packet size (i.e., the transmission delay is constant), which in turn affects the perceived queueing delay. That is, if the available bandwidth is enough to empty the queues, the queued packets do not experience the queueing delay due to the transmission of previous packets.

As described in the simulation-based validation (Section 6.4.1), the lowest-priority events experience the highest response time difference under saturated conditions. Here, we notice constant response time differences across all priority classes in the unsaturated setting (Figure 10(aa)). For the saturated and overloaded conditions (Figures 10(ab) and 10(ac)), we observe larger differences for lower priorities due to the Linux TC packet transmission limitations. Because these packets wait in the queues for a longer period, this difference is compounded further by the lack of transmission delay for each queued packet in front of it. Hence, we expect to see a gap between the analytical model and the simulated/emulated results. We then scale up the number of subscribers as shown in Figure 10(b). We parameterize and deploy the system with the following number of subscribers:  $|S| = 10, 20, 50, 80, 100$ . To maintain the same degree of system saturation

Table 3. Comparison of PrioDeX with Related Work

	App-Layer Requirements	Methodology Used	Technologies and Tools	Prototype	QoS Metric Improvement
Zhang et al. [65]	Prioritized data classes	Bandwidth allocation to prioritized data flows	Apache HTTP & Squid cache servers	✓	Response time
Saghian and Ravanmehr [50]	Data flows importance	Priority queues	OMNet++ simulator	✗	Response time
Yu et al. [60]	Delay- and bandwidth-sensitive apps	DPI and Laplacian SVM	SDN, OpenFlow	✗	Network resource utilization
Li et al. [38]	App data types	C4.5 decision tree, priority queues	SDN, OpenFlow	✓	Response time, throughput
An et al. [6]	Delay-sensitive and delay-tolerant traffic	Priority-adjustment algorithms	NS-2 simulator	✗	Real-time requirement satisfaction
Shi et al. [54]	Delay requirements, data semantics	Priority queues based on semantics	SDN, OpenFlow, LDAP	✓	Response time
Bröring et al. [17]	Video QoS constraints	Bandwidth allocation	DNode-RED, SDN, OpenFlow, MQTT	✓	Response time, delivery success rate
Nguyen et al. [42]	Utility functions	Bandwidth allocation to prioritized data flows	Java simulator	✗	Response time, network resource utilization
<b>PrioDeX</b>	Utility functions	Priority queues, analytical models, heuristic and optimization-based algorithms	SDN, OpenFlow, MQTT, MQTT-SN	✓	Response time, network resource utilization, maximizing user's utility

(i.e.,  $\rho_{Q_{x_k}^{out}} = 1.7$ ), we increase the bandwidth proportional to the number of subscribers. As shown in Figure 10(b), the implementation produces again accurate results that closely match the simulated and analytical ones.

## 7 RELATED WORK

In this section, we compare PrioDeX against other related data exchange systems for enabling reliable and timely data exchange. We summarize the principal solutions in Table 3 with regard to the considered app layer requirements (if any), the methodology used to improve the system's performance, the technologies and tools leveraged to implement the prototype or perform experiments, and the improvement in terms of QoS metrics. To enable reliable and timely data exchange, existing solutions manipulate data at both the middleware and network layers. Early middleware-based solutions [18, 39, 65] support prioritization or bandwidth allocation based on the available system capacity, data relevance, and data importance. More recent middleware solutions assign priorities based on validity span of published data and subscriptions [50] or based on delay and reliability requirements [58]. Currently, standardized message brokers such as RabbitMQ, ActiveMQ, and so forth support the assignment of priorities at the publisher side prior to the emission of a message.

With the advent of novel networking technologies (e.g., OpenFlow [40], P4 [13]), advanced capabilities are provided to system designers to customize the underlying network infrastructure. SDN-based approaches [33] have been used for improving network resiliency [3] and handover latency in 5G network environments [4]. Other research into SDN-enabled 5G cellular architectures [56] supports the potential for such interfaces that connect emergency responder devices to



the building's internal network. SDN provides a variety of abstractions to represent the underlying physical network. Yu et al. [60] leverage SDN to apply *deep packet inspection* (DPI) and *Laplacian SVM* techniques for identifying applications with delay or bandwidth requirements, which are then used to improve the overall network resource utilization. Also, SDN has been leveraged for priority assignment and bandwidth allocation to network flows to satisfy app-specific requirements. These include authorized access to directly manage physical switches, control over virtual (software-based) switches [46] (e.g., running alongside the broker), network virtualization [12] to reserve "slices" of the physical infrastructure, and so forth. Li et al. [38] introduce a middleware solution that assigns priority levels to network flows based on three different classes of data: *expedited forwarding*, *assured forwarding* and *best effort*. Similarly, An et al. [6] assign priorities based on the type of data traffic (i.e., delay-sensitive or delay-tolerant traffic), and Shi et al. [54] assign priorities based on the semantics of data. Finally, Bröring et al [17] allocate bandwidth to SDN network flows based on video-specific application-level QoS constraints (e.g., min/max frame rate). While the above approaches manage network flows in SDN switches based on application data flows/types, IoT devices in buildings/structures (e.g., sensors, cameras) produce data that varies in size, frequency (periodic samples vs. asynchronous alerts), type, and importance to individual subscribers [8, 51, 63, 64]. Research on *Network Utility Maximization* (NUM) [59] aims to tune the underlying network according to application-level requirements. NUM configures a network (e.g., assigns bandwidth) to serve nodes in a manner that maximizes utility functions to capture a user's degree of satisfaction with the network's performance. However, few prior researchers have investigated discrete priority classes, which we leverage in our approach, within the context of NUM. The authors of [42] propose assigning more bandwidth to users (i.e., via weighting their requests higher) based on their requested priority levels.

Our cross-layer approach and consideration of utility functions set apart our work from most related SDN research referenced above. Utility functions enable a more flexible configuration of application-level requirements (e.g., information needs) including mission-critical ones. In addition, PrioDeX leverages SDN to manage networking at the Edge for IoT deployments by offloading network configuration tasks from constrained devices and network hardware.

## 8 CONCLUSION

In this article we presented PrioDeX, an extensible middleware for timely and reliable IoT data exchange. Our proposed SDN-enabled three-layer approach bridges application-specified information requirements, generic data exchange capabilities, and physical network characteristics for efficient delivery of mission-critical data from IoT sources to relevant consumers. We design a cross-layer queueing analytical model for estimating system performance metrics. These metrics are used as input to the PrioDeX algorithms for assigning priorities to subscriptions and tune their bandwidth allocation (via packet drop rates) to maximize overall situational awareness. Our experimental results show that our approach greatly improves the performance in terms of information value captured as well as end-to-end delays. PrioDeX can inspire system designers to build the next generation of *Smart Firefighting* systems with support for proper filtering, prioritizing, and analysis. In addition, application developers can leverage PrioDeX to define the situational awareness information of any emergency response (e.g., active shooter) and QoS-dependent scenarios (e.g., traffic estimation). Research scientists can leverage and further extend PrioDeX's theoretic-grounded models for the QoS evaluation of IoT-enabled smart spaces at runtime so as to support their adaptation in relation with the evolving operating environment.

The modular design of our theoretical model supports the composition of alternative queueing models. Hence, it lays the groundwork for many potential extensions and alterations, some of which we will address in future work. In particular, we aim to consider non-Poisson arrival

and service rates by using, e.g., G/G/1 queues; convert larger events into many packets (or many events into one packet) by applying the queueing theoretic concept of *batch arrivals* [53]; and configure an entire broker network rather than just the local broker at the Edge. In addition, we plan to extend our prototype to include managing dynamic conditions such as failing publisher devices and varying network bandwidth/error rates; accurately and efficiently estimating publication rates; considering SDN overhead (e.g., flow table space required, delay for configuration changes and statistics collection); and supporting alternative formulations of tunable bandwidth allocation (e.g., traffic policing). Finally, we will build on the PrioDeX prototype to explore further IoT middleware challenges in emergency response settings.

## APPENDICES

### A MULTI-CLASS PRIORITY QUEUE ANALYTICAL MODEL

We now prove the analytical model that estimates the average response time of events matching subscription  $r_k$  in the system (queue+server) of  $Q_{mclpr}$ . This is a *non-preemptive multi-class priority* queueing system where each subscription ( $r_j \in R$ ) corresponds to a class and one or more subscriptions can be mapped to priority level  $y_j \in Y$ .

Based on Equation (13), to estimate  $\Delta_{Q_{mclpr}}$  for a given  $r_k$ , we accept as input the set of arrival ( $\lambda^{sub}$ ) and processing ( $\mu^{sub}$ ) rates:

$$\lambda^{sub} = \{\lambda_{r_j} : r_j \in R\} \quad (32)$$

$$\mu^{sub} = \{\mu_{r_j} : r_j \in R\}. \quad (33)$$

As previously discussed, a given subscription ( $r_k$ ) is mapped to a priority ( $y_c$ ) as given by

$$y_c = \Phi \circ \Psi(r_k). \quad (34)$$

Let  $\lambda^{prio}$  be the set of arrival rates and  $\mu^{prio}$  be the set of processing rates per  $y_j$ :

$$\lambda^{prio} = \{\lambda_{y_j} : y_j \in Y\} \quad (35)$$

$$\mu^{prio} = \{\mu_{y_j} : y_j \in Y\}. \quad (36)$$

Because one or more  $r_j$  can be mapped to a  $y_c$ , by Equation (34) we can estimate the arrival rate  $\lambda_{y_c}$  of events with assigned priority  $y_c$  as follows:

$$\lambda_{y_c} = \sum_{\{r_j \in R : y_c = \Phi \circ \Psi(r_j)\}} \lambda_{r_j}. \quad (37)$$

Similarly, the processing rate  $\mu_{y_c}$  is estimated as follows:

$$\mu_{y_c} = \left[ \sum_{\{r_j \in R : y_c = \Phi \circ \Psi(r_j)\}} \frac{\lambda_{r_j}}{\lambda_{y_c}} \frac{1}{\mu_{r_j}} \right]^{-1}. \quad (38)$$

Similarly, we can estimate arrival and processing rates for any priority  $y_j$ . We now rely on Equations (37) and (38) and the analysis in Section 3.4.2 of [27] to estimate the waiting time (delay only in the queue)  $\Delta_q^{y_c}$  for a given  $y_c$  as follows:

$$\Delta_q^{y_c} = \frac{\sum_{y_j \in Y} \frac{\rho_{y_j}}{\mu_{y_j}}}{(1 - \sigma_{y_c-1})(1 - \sigma_{y_c})}, \quad (39)$$

where  $\rho_{y_j} = \lambda_{y_j} / \mu_{y_j}$  and  $\sigma_{y_c} = \sum_{i=0}^c \rho_{y_i}$  (i.e., the sum of  $\rho_{y_i}$  for all priority classes  $y_i$  whose priority is higher than or equal to  $y_c$ ). Let  $L_q^{y_c}$  be the average number of priority- $y_c$  events in the queue. From Equation (39), Little's law then gives

$$L_q^{y_c} = \Delta_q^{y_c} \lambda_{y_c}. \quad (40)$$

Finally, let  $\Delta^{y_c}$  be the average response time of priority- $y_c$  events in the system (queue+server). This is estimated as follows:

$$\Delta^{y_c} = \Delta_q^{y_c} + \frac{1}{\mu_{y_c}}. \quad (41)$$

Let  $L_q^{r_k}$  be the average number of events in the queue matching subscription  $r_k$  with priority  $y_c$ . Using Equations (37) and (40), this can be estimated by

$$L_q^{r_k} = \frac{\lambda_{r_k}}{\lambda_{y_c}} L_q^{y_c}, \quad (42)$$

and the average number of priority- $y_c$  events in the system matching subscription  $r_k$  is given by

$$L^{r_k} = L_q^{r_k} \frac{\lambda_{r_k}}{\mu_{r_k}}. \quad (43)$$

Finally, by relying on Little's law and Equation (43), the average response time of events matching a given subscription  $r_k$  in the multi-class priority queueing system ( $Q_{mclpr}$ ) is given by

$$\Delta_{Q_{mclpr}} = \frac{L^{r_k}}{\lambda_{r_k}}. \quad (44)$$

## B EFFICIENTLY COMPUTING DROP RATE POLICIES

We now detail efficiently computing drop rate policies for the PrioDeX middleware by solving Equation (23) for the flat, linear, and exponential drop rate policies. Considering Equations (23) and (24), we aim to find

$$\rho_{Q_{x_k}^{out}} = \sum_{r_j \in R_{x_k}} \frac{\lambda_{x_k, r_j}^{thru}}{\mu_{x_k, r_j}^{out}} = 1 - \tilde{\rho}. \quad (45)$$

We can expand the denominator to rewrite the previous equation considering Equations (6) and (7):

$$\rho_{Q_{x_k}^{out}} = \sum_{r_j \in R_{x_k}} \frac{\lambda_{b_k, r_j}^{notify} G_{v_j} (1 - \Omega \circ \Psi(r_j))}{w_{x_k, s_i}} = 1 - \tilde{\rho}, \quad (46)$$

where  $\Omega \circ \Psi(r_j)$  represents the drop rate for the subscription  $r_j$ . Equation (46) is the starting point for each of the following derivations.

We omit the proof for the Flat and the Linear drop rate policies, since it is very similar to the Exponential. We just present the final results.

$$\text{Flat : } \beta = 1 - \frac{\sum_{s_i \in S_{x_k}} w_{x_k, s_i} (1 - \tilde{\rho})}{\sum_{r_j \in R_{x_k}} \lambda_{b_k, r_j}^{notify} G_{v_j}} \quad (47)$$

$$\text{Linear : } \beta = \frac{\sum_{r_j \in R_{x_k}} \lambda_{b_k, r_j}^{notify} G_{v_j} - \sum_{s_i \in S_{x_k}} w_{x_k, s_i} (1 - \tilde{\rho})}{\sum_{r_j \in R_{x_k}} \lambda_{b_k, r_j}^{notify} G_{v_j} \Phi(f_j)} \quad (48)$$

**Exponential Drop Rate Policy.** This policy sets each network flow's drop rate according to its assigned priority level. The drop rate for subscription  $r_j$  is equal to the drop rate assigned to its network flow  $f_j$ . Hence, considering Equation (27), we have

$$\Omega \circ \Psi(r_j) = \Omega(f_j) = 1 - \beta^{-\Phi(f_j)}. \quad (49)$$

Substituting Equation (49) into (46), we obtain

$$\sum_{r_j \in R_{x_k}} \frac{\lambda_{b_k, r_j}^{notify} G_{v_j} (1 - (1 - \beta^{-\Phi(f_j)}))}{w_{x_k, s_i}} = 1 - \tilde{\rho}. \quad (50)$$

We isolate the constant term  $\beta$ :

$$\sum_{r_j \in R_{x_k}} \lambda_{b_k, r_j}^{notify} G_{v_j} (1 - (1 - \beta^{-\Phi(f_j)})) = \sum_{s_i \in S_{x_k}} w_{x_k, s_i} (1 - \tilde{\rho}) \quad (51)$$

$$\sum_{r_j \in R_{x_k}} \lambda_{b_k, r_j}^{notify} G_{v_j} \beta^{-\Phi(f_j)} = \sum_{s_i \in S_{x_k}} w_{x_k, s_i} (1 - \tilde{\rho}). \quad (52)$$

Since  $\Phi(f_j) \in Y \forall f_j \in F$  where  $Y = \{0, 1, \dots, N-1\}$ , we have

$$\sum_{y \in Y} \beta^{-y} \left( \sum_{r_j \in R_{x_k}, \Phi(f_j)=y} \lambda_{b_k, r_j}^{notify} G_{v_j} \right) - \sum_{s_i \in S_{x_k}} w_{x_k, s_i} (1 - \tilde{\rho}) = 0. \quad (53)$$

Note that we can express this as a polynomial. Substituting  $\alpha = \beta^{-1}$ , we get

$$\sum_{y \in Y} \alpha^y \left( \sum_{r_j \in R_{x_k}, \Phi(f_j)=y} \lambda_{b_k, r_j}^{notify} G_{v_j} \right) - \sum_{s_i \in S_{x_k}} w_{x_k, s_i} (1 - \tilde{\rho}) = 0. \quad (54)$$

We can therefore solve the  $(N-1)$ -order polynomial given in Equation (54) to efficiently compute the exponential drop rates. We can solve this polynomial using the algorithm described in [32]. It relies on computing the eigenvalues of the companion matrix. The commonly used NumPy Python library [44] implements this algorithm.

## REFERENCES

- [1] AMQP Working Group 0-9-1. 2008. <http://www.amqp.org/specification/0-9-1/amqp-org-download>.
- [2] A. Agrawal, R. Verschueren, S. Diamond, and S. Boyd. 2018. A rewriting system for convex optimization problems. *Journal of Control and Decision* 5, 1 (2018), 42–60.
- [3] J. Ai, H. Chen, Z. Guo, G. Cheng, and T. Baker. 2019. Improving resiliency of software-defined networks with network coding-based multipath routing. In *IEEE Symposium on Computers and Communications (ISCC'19)*. 1–6.
- [4] A. S. D. Alfoudi, S. Newaz, R. Ramlie, G. M. Lee, and T. Baker. 2019. Seamless mobility management in heterogeneous 5G networks: A coordination approach among distributed SDN controllers. In *IEEE 89th Vehicular Technology Conf. (VTC'19-Spring)*. 1–6.
- [5] W. Almesberger et al. 1999. Linux network traffic control-implementation overview.
- [6] N. An, T. Ha, K. J. Park, and H. Lim. 2016. Dynamic priority-adjustment for real-time flows in software-defined networks. In *17th Intl. Telecommunications Network Strategy and Planning Symposium (Networks'16)*. IEEE, 144–149.
- [7] C. C. Beard and V. S. Frost. 2004. Prioritization of emergency network traffic using ticket servers: A performance analysis. *Simulation* 80, 6 (2004), 289–299.
- [8] S. Behnel, L. Fiege, and G. Muhl. 2006. On quality-of-service and publish-subscribe. In *ICDCS Workshops*. IEEE.
- [9] K. Benson, C. Fracchia, G. Wang, Q. Zhu, S. Almomen, J. Cohn, L. D'arcy, D. Hoffman, M. Makai, J. Stamatakis, and N. Venkatasubramanian. 2015. SCALE: Safe community awareness and alerting leveraging the Internet of Things. *IEEE Communications Magazine* 53, 12 (2015), 27–34.

- [10] K. E. Benson, G. Bouloukakakis, C. Grant, V. Issarny, S. Mehrotra, I. Moscholios, and N. Venkatasubramanian. 2018. FireDeX: A prioritized IoT data exchange middleware for emergency response. *ACM/IFIP/USENIX Intl. Middleware Conf.*, 279–292.
- [11] K. E. Benson, G. Wang, N. Venkatasubramanian, and Y. Kim. 2018. Ride: A resilient IoT data exchange middleware leveraging SDN and edge cloud resources. In *2018 IEEE/ACM 3rd Intl. Conf. on Internet-of-Things Design and Implementation (IoTDI'18)*. 72–83.
- [12] A. Blenk, A. Basta, M. Reisslein, and W. Kellerer. 2015. Survey on network virtualization hypervisors for software defined networking. *CoRR* abs/1506.07275 (2015). arXiv:1506.07275. <http://arxiv.org/abs/1506.07275>.
- [13] P. Bosshart, D. Daly, G. Gibb, M. Izzard, N. McKeown, J. Rexford, C. Schlesinger, D. Talayco, A. Vahdat, G. Varghese, and D. Walker. 2014. P4: Programming protocol-independent packet processors. *SIGCOMM Computer Communication Review* 44, 3 (July 2014), 87–95.
- [14] G. Bouloukakakis, N. Georgantas, A. Kattepur, and V. Issarny. 2017. Timeliness evaluation of intermittent mobile connectivity over pub/sub systems. In *Proceedings of the 8th ACM/SPEC on Intl. Conf. on Performance Engineering*. 275–286.
- [15] G. Bouloukakakis, I. Moscholios, N. Georgantas, and V. Issarny. 2017. Performance modeling of the middleware overlay infrastructure of mobile things. In *IEEE Intl. Conf. on Communications*.
- [16] Moquette Broker. 2014. <https://github.com/andsel/moquette/>.
- [17] A. Bröring, J. Seeger, M. Papoutsakis, K. Fysarakis, and A. Caracalli. 2020. Networking-aware IoT application development. *Sensors* 20, 3 (2020), 897.
- [18] S. Chakravarthy and N. Vontella. 2004. A publish/subscribe based architecture of an alert server to support prioritized and persistent alerts. In *Intl. Conf. on Distributed Computing and Internet Technology*. Springer, 106–116.
- [19] MQTT-SN UDP client. 2016. <https://github.com/jsaak/mqtt-sn-gateway>.
- [20] Paho Java Client. 2008. <https://www.eclipse.org/paho/clients/java/>.
- [21] Ryu SDN Controller. 2011. <https://osrg.github.io/ryu/>.
- [22] S. Diamond and S. Boyd. 2016. CVXPY: A Python-embedded modeling language for convex optimization. *Journal of Machine Learning Research* 17, 83 (2016), 1–5.
- [23] G. Faraci, A. Lombardo, and G. Schembra. 2017. A building block to model an SDN/NFV network. In *2017 IEEE Intl. Conf. on Communications (ICC'17)*. 1–7.
- [24] T. Field. 2006. JINQS: An extensible library for simulating multiclass queueing networks, v1. 0 user guide.
- [25] Flask Web Framework. 2010. <http://flask.pocoo.org/>.
- [26] MQTT-SN Transparent Gateway. 2016. <https://www.eclipse.org/paho/components/mqtt-sn-transparent-gateway/>.
- [27] D. Gross, J. Shortle, J. Thompson, and C. Harris. 2008. *Fundamentals of Queueing Theory*. 4th ed. John Wiley & Sons.
- [28] D. A. Schult, and P. J. Swart. 2008. Exploring network structure, dynamics, and function using NetworkX. In *Proceedings of the 7th Python in science conferences (SciPy'08)*. Pasadena, CA, 11–16.
- [29] H. Halabian, I. Lambadaris, and C.-H. Lung. 2010. Network capacity region of multi-queue multi-server queueing system with time varying connectivities. In *2010 IEEE Intl. Symposium on Information Theory*. IEEE, 1803–1807.
- [30] A. Hamins, C. Grant, N. Bryner, A. Jones, and G. Koepke. 2015. *NIST Special Publication 1191 Research Roadmap for Smart Fire Fighting*. National Institute Of Standards and Technology.
- [31] F. He, L. Baresi, C. Ghezzi, and P. Spoletini. 2007. Formal analysis of publish-subscribe systems by probabilistic timed automata. In *Intl. Conf. on Formal Techniques for Networked and Distributed Systems*. 247–262.
- [32] R. A. Horn and C. R. Johnson. 2012. *Matrix Analysis*. Cambridge, UK: Cambridge University Press.
- [33] T. Hu, Z. Guo, P. Yi, T. Baker, and J. Lan. 2018. Multi-controller based software-defined networking: A survey. *IEEE Access* 6 (2018), 15980–15996.
- [34] IBM 2013. *MQTT for Sensor Networks (MQTT-SN)*. IBM.
- [35] M. Inoue, Y. Owada, K. Hamaguti, and R. Miura. 2014. Nerve Net: A regional-area network for resilient local information sharing and communications. In *Proceedings of the 2014 2nd Intl. Symposium on Computing and Networking (CANDAR'14)*. IEEE Computer Society, Washington, DC, 3–6.
- [36] S. Kounev, K. Sachs, J. Bacon, and A. Buchmann. 2008. A methodology for performance modeling of distributed event-based systems. In *11th IEEE Intl. Symposium on Object Oriented Real-Time Distributed Computing (ISORC'08)*. 13–22.
- [37] E. Lazowska, J. Zahorjan, S. Graham, and K. Sevcik. 1984. *Quantitative System Performance: Computer System Analysis Using Queueing Network Models*. Prentice-Hall, Inc.
- [38] F. Li, J. Cao, X. Wang, and Y. Sun. 2017. A QoS guaranteed technique for cloud applications based on software defined networking. *IEEE Access* 5 (2017), 21229–21241.
- [39] P. Maheshwari, H. Tang, and R. Liang. 2004. Enhancing web services with message-oriented middleware. In *Proceedings of the Intl. Conf. on Web Services*. IEEE, 524–531.
- [40] N. McKeown, T. Anderson, H. Balakrishnan, G. Parulkar, L. Peterson, J. Rexford, S. Shenker, and J. Turner. 2008. OpenFlow: Enabling innovation in campus networks. *SIGCOMM Computer Communication Review* 38, 2 (March 2008), 69–74.

- [41] Mininet. 2016. Mininet: An Instant Virtual Network on Your Laptop (or Other PC). <http://mininet.org/>
- [42] H. A. Nguyen, T. V. Nguyen, and D. Choi. 2009. How to maximize user satisfaction degree in multi-service IP networks. In *2009 1st Asian Conf. on Intelligent Information and Database Systems*. 471–476.
- [43] OASIS. 2014. *MQTT Version 3.1.1*. OASIS.
- [44] T. E. Oliphant. 2006. *A Guide to NumPy*. Vol. 1. Trelgol Publishing USA.
- [45] Stochastic OVS. 2014. <https://github.com/saeenali/openvswitch/wiki/>.
- [46] B. Pfaff, J. Pettit, T. Koponen, E. J. Jackson, A. Zhou, et al. 2015. The design and implementation of open vSwitch. In *12th Symposium on Networked Systems Design and Implementation (NSDI'15)*.
- [47] RabbitMQ. 2018. <https://www.rabbitmq.com/>.
- [48] Buffer Requirements. 2008. <https://people.ucsc.edu/~warner/buffer.html>.
- [49] K. Sachs, S. Kounev, and A. Buchmann. 2013. Performance modeling and analysis of message-oriented event-driven systems. *Software & Systems Modeling* 12, 4 (2013), 705–729.
- [50] M. Saghian and R. Ravanmehr. 2015. Publish/subscribe middleware for resource discovery in MANET. In *2015 15th IEEE/ACM Intl. Symposium on Cluster, Cloud and Grid Computing*. IEEE, 1205–1208.
- [51] P. Salehi, K. Zhang, and H. Jacobsen. 2017. PopSub: Improving resource utilization in distributed content-based publish/subscribe systems. In *Distributed Event-Based Systems (DEBS'17)*. ACM, 88–99.
- [52] A. Schröter, G. Mühl, S. Kounev, H. Parzyjegl, and J. Richling. 2010. Stochastic performance analysis and capacity planning of publish/subscribe systems. In *Distributed Event-Based Systems (DEBS'10)*. ACM, 258–269.
- [53] D. N. Shanbhag. 1966. On infinite server queues with batch arrivals. *Journal of Applied Probability* 3, 1 (1966), 274–279.
- [54] Y. Shi, Y. Zhang, H.-A. Jacobsen, L. Tang, G. Elliott, G. Zhang, X. Chen, and J. Chen. 2019. Using machine learning to provide reliable differentiated services for IoT in SDN-like publish/subscribe middleware. *Sensors* 19, 6 (2019), 1449.
- [55] D. Singh, B. Ng, Y. Lai, Y. Lin, and W. K. G. Seah. 2017. Modelling software-defined networking: Switch design with finite buffer and priority queueing. In *2017 IEEE 42nd Conf. on Local Computer Networks (LCN'17)*. IEEE, 567–570.
- [56] S. Khan Tayyaba and M. A. Shah. 2019. Resource allocation in SDN based 5G cellular networks. *Peer-to-Peer Networking and Applications* 12, 2 (2019), 514–538.
- [57] Open vSwitch. 2016. <http://openvswitch.org/>.
- [58] Y. Wang, Y. Zhang, and J. Chen. 2017. Pursuing differentiated services in a SDN-based IoT-oriented pub/sub system. In *24th International Conference on Web Services*. IEEE, 906–909.
- [59] Y. Yi and M. Chiang. 2008. Stochastic network utility maximisation – A tribute to Kelly’s paper published in this journal a decade ago. *European Transactions on Telecommunications* 19, 4 (2008), 421–442.
- [60] C. Yu, J. Lan, Z. Guo, Y. Hu, and T. Baker. 2019. An adaptive and lightweight update mechanism for SDN. *IEEE Access* 7 (2019), 12914–12927.
- [61] P. J. Mosterman, T. Padir, Y. Wan, J. Zander, and S. Fu. 2015. Cyber-physical systems can make emergency response smart. *Procedia Engineering* 107 (2015), 312–318.
- [62] K. Zhang and H. Jacobsen. 2013. SDN-like: The next generation of pub/sub. *CoRR* abs/1308.0056 (2013). <http://arxiv.org/abs/1308.0056>.
- [63] K. Zhang, V. Muthusamy, M. Sadoghi, and H. Jacobsen. 2017. Subscription covering for relevance-based filtering in content-based publish/subscribe systems. In *IEEE 37th ICDCS*. IEEE, 2039–2044.
- [64] K. Zhang, M. Sadoghi, V. Muthusamy, and H. Jacobsen. 2017. Efficient covering for top-k filtering in content-based publish/subscribe systems. In *Proceedings of the 18th ACM/IFIP/USENIX Middleware Conf.* 174–184.
- [65] R. Zhang, C. Lu, T. F. Abdelzaher, and J. A. Stankovic. 2002. Controlware: A middleware architecture for feedback control of software performance. In *Proceedings 22nd Intl. Conf. on Distributed Computing Systems*. IEEE, 301–310.

Received November 2019; revised December 2020; accepted March 2021