

Autonomous Vehicles on the Edge: A Survey on Autonomous Vehicle Racing

Johannes Betz, Hongrui Zheng, Alexander Liniger, Ugo Rosolia, Phillip Karle,
Madhur Behl, Venkat Krovi, Rahul Mangharam

The rising popularity of self-driving cars has led to the emergence of a new research field in the recent years: Autonomous racing. Researchers are developing software and hardware for high performance race vehicles which aim to operate autonomously on the edge of the vehicles limits: High speeds, high accelerations, low reaction times, highly uncertain, dynamic and adversarial environments. This paper represents the first holistic survey that covers the research in the field of autonomous racing. We focus on the field of autonomous racecars only and display the algorithms, methods and approaches that are used in the fields of perception, planning and control as well as end-to-end learning. Further, with an increasing number of autonomous racing competitions, researchers now have access to a range of high performance platforms to test and evaluate their autonomy algorithms. This survey presents a comprehensive overview of the current autonomous racing platforms emphasizing both the software-hardware co-evolution to the current stage. Finally, based on additional discussion with leading researchers in the field we conclude with a summary of open research challenges that will guide future researchers in this field.

Index Terms—Autonomous systems, autonomous vehicles, intelligent vehicles, advanced driver assistance, simultaneous localization and mapping, path planning, control

I. INTRODUCTION

WHAT aerospace engineering is to aviation, motorsport is to automotive technology. For over a century now, racing series such as Formula 1, Indy Car or the World Rally Championship have served to inspire research and product innovation to improve performance and safety in commercial road vehicles. These developments include well-known elements such as the disc brake, the turbocharger or production measures for fibre composites (e.g. carbon). In more recent years, developments in the hybrid powertrain but also in the connectivity (real-time measurement and transfer of vehicle data) of the vehicles have emerged. With millions of dollars of investment and prestige at stake, these developments target towards a singular goal: The racecar must achieve the fastest lap time and thus win the race at the end. With a vehicle that moves at the dynamic limits of handling, that reaches high velocities, that is designed for aerodynamic efficiency and that consists of pure lightweight construction, traditionally the target of the minimum lap time can only be achieved through extremely novel, sophisticated and radical developments. But the technical development of the racecar is only half of the effort. In motorsport racing, it all boils down to the ability of the driver to operate the racecar at its limits [1], [2].

Expert race drivers are extremely proficient in pushing the racecar to its dynamical limits of handling, while account for continuously changing parameters such as tire wear, changing brake bias, and engine maps from turn to turn, communicating strategy and status with the team in the pits, and trying to maintain track position or overtake fierce competitors all while driving at speeds exceeding 300 km/h.

All of these facets manifest themselves in the innumerable research and development challenges sought to be addressed in the burgeoning field of *autonomous vehicle racing*. The current state of the art of autonomous driving software – either from commercial companies or researchers – is capable of operating autonomously but only to a limited velocity. Everything that we find in classic motorsport can also be found in autonomous motorsport - with one difference: The racecar-driver is based on software only. More or less this means that a highly sophisticated autonomous driving software needs to replace the human pilot and it should be capable of detecting other vehicles, localize the vehicle position relative to the opponents and the track while driving at high speeds, planning dynamic trajectories to allow overtaking in adversarial environments, and correcting at high frequency to the steering angle to stay on the racetrack. Furthermore, the vehicle needs to execute a performance assessment on its own by adjusting the aerodynamics, energy distribution, differential settings or brake balance settings based on tire wear, temperature and weather. On this premise, an autonomous racecar exceeds the requirements for the software to a wide extent in comparison to a normal passenger car - which provides many learning outcomes, research questions and new algorithmic developments [3], [4]. It is also worthy of note that the requirements for autonomous racecars versus passenger vehicles can be quite disparate - precluding a direct transplant of a complete autonomous driving stack. Therefore, autonomous racing has emerged as a field where advanced algorithmic approaches are tested and then individually transferred to the development of autonomous passenger vehicles - similar to classic motorsport.

Manuscript received XX 2021; revised XX XX, 2021. Corresponding author: Johannes Betz (email: joebetz@seas.upenn.edu)

This work was sponsored by the Department of Transportation and NSF. J. Betz, H. Zheng and R. Mangharam are with the Department of Electrical and Systems Engineering, University of Pennsylvania, Philadelphia, USA (e-mail: joebetz, hongruiz, rahulm@seas.upenn.edu)

A. Liniger is with the Department of Information Technology and Electrical Engineering, ETH Zurich, Switzerland (e-mail: alex.liniger@vision.ee.ethz.ch)

U. Rosolia is with the AMBER Lab, California Institute of Technology, Pasadena, USA (e-mail: urosolia@caltech.edu)

P. Karle is with the Institute of Automotive Technology, Technical University of Munich, Germany (e-mail: phillip.karle@tum.de)

M. Behl is with the Department of Computer Science, University of Virginia, Charlottesville, USA (e-mail: madhur.behl@virginia.edu)

V. Krovi is with the College of Engineering, Computing and Applied Sciences, Clemson University, Clemson, USA (e-mail: mb2kg@virginia.edu)

This paper provides the first survey of the state of the art research in the field of autonomous vehicle racing. By summarizing, classifying and evaluating the different software and hardware developments we provide a holistic overview of the research in this field. Finally, we discuss future research directions by highlighting open questions and challenges in autonomous racing.

A. Contributions

In this survey we present the efforts and the research that was conducted in recent years in the field of autonomous racing. This work has four main contributions:

- 1) With this paper we provide the first survey to comprehensively cover the topic of autonomous vehicle racing for both software and hardware developments.
- 2) We provide an extensive review of all research papers that developed new autonomy software for autonomous racecars. By splitting this software review into subsections of perception, planning and control we display in detail which methods and approaches were used. We compare the different approaches to each other and explain their algorithmic setup. Furthermore, we discuss recent efforts made with methods from the field of deep neural networks (DNN) and reinforcement learning (RL) to achieve a partial or full end-to-end pipelines for autonomous racing.
- 3) We display an overview of the current autonomous racing competitions which provide hardware, a racing environment as well as an organization (e.g. sports and technical regulations). We compare the different racing series and hardware against each other and give a holistic overview for potential interested researchers.
- 4) Finally, we present a list of open research questions and challenges in the field of autonomous racing. We discuss that these open challenges can be applied to the field of passenger cars, too, and provide opportunities for future researchers to work on relevant research topics.

B. Preliminary Remarks

1) Definition: Autonomous Racing

Although the term of autonomous racing can be referred to different applications (e.g. drone racing) we focus in this paper only on research in the field of autonomous racing *cars*. These racecars need to have four wheels, can either have a combustion engine or electrical engine as a main power unit, can be real racecars (e.g. Formula 1 car) or small-scale vehicles (e.g. 1:10 scale). In addition, the software and hardware surveyed here must have a clear connection to the field of automobile racing. This means that the authors of these papers either used a specific hardware that is acting in a racing environment (e.g. racetrack, adversarial setup), they used a specific simulation that displays a racecar within an racing environment (e.g. racing game for PC) or their research displays specific solutions for a racing problem (e.g. driving fast autonomously around the racetrack). Although some authors present results and algorithms for high speed autonomous driving on the freeway this work is not covered

in this survey because neither the aspect of handling the vehicles at the limits nor the adversarial context is given here sufficiently.

2) Research Categorization

The field of autonomous racing provides plenty of development and research categories. For this survey we want to display both software and hardware efforts in the field of autonomous racing and therefore we use the following *perception - planning - control* pipeline [235] depicted in Figure 1 to categorize the research papers.

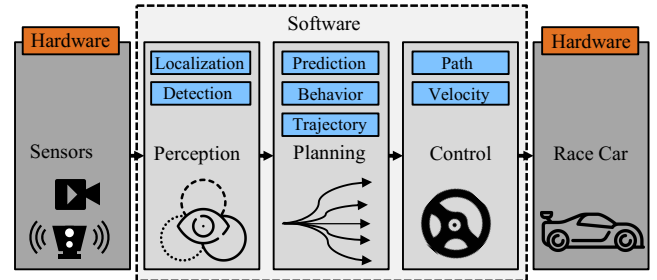


Fig. 1. Autonomous driving pipeline including both hardware and software that provides the categorization for the survey in the field of autonomous racing

Research and developments in the field of autonomous racing hardware (sensors and vehicle hardware) are discussed in Section III. Unfortunately, we have not seen any specific developments of sensors for the purpose of autonomous racing and therefore we heavily focus on the used racing vehicle platforms. By presenting vehicle setups (sensors, computation hardware, racing environment) we provide a clear overview of which hardware is available for researchers. The biggest part of this survey paper presents research and software in the field of perception, planning and control in Section II. In Subsection II-A *perception*, we cover all algorithms that provide either a solution for mapping, localization or object detection. In Subsection II-B *planning* we display global and local trajectory and behavior planners. The final Subsection II-C is used to present algorithms in the field of *control* and displays the solutions for path and velocity tracking at the handling limits. Unfortunately, there are many papers out there that act on the intersection of planning and control. Those papers have no clear distinction in which field they belong and therefore we decided to categorize them in either one of those field based on their focus. The method of DNNs has become more and more popular in the recent years and different authors proposed so called *end-to-end* approaches that solve the autonomous driving task. These kind of techniques are displayed in Subsection II-D. In addition, some authors proposed evaluations with racecars, complete software pipelines, modelling efforts and simulation environments for autonomous racecars that do not fit in the proposed categories. Those papers are listed in Subsection II-E. In summary, this survey is covering all research papers in the field published until the end of 2021.

II. AUTONOMOUS RACING SOFTWARE

A. Perception

Perception provides the general term for all algorithms that perceive the environment and derive knowledge about it. In particular, perception includes detecting objects, detecting the free space, mapping the environment as well as localizing the autonomous vehicle. In an autonomous racing environment we deal with high speeds and therefore the question arises: How fast is too fast? Falanga et al. [54] tried to answer this question for autonomous robots with an additional case study on autonomous quadcopters. The authors came to the conclusion that the maximum latency an autonomous system can tolerate to guarantee safety (not crashing in an object) is related to the desired speed, the agility of the system (e.g. the maximum acceleration it can produce) and the perception parameter of the sensors (e.g. the sensing range). For autonomous racecars the same parameters can be taken into account but no particular evaluation regarding high speed perception for autonomous racecars has been done yet. The current state of the art in the field of autonomous racing perception is summarized, categorized and displayed in Table I.

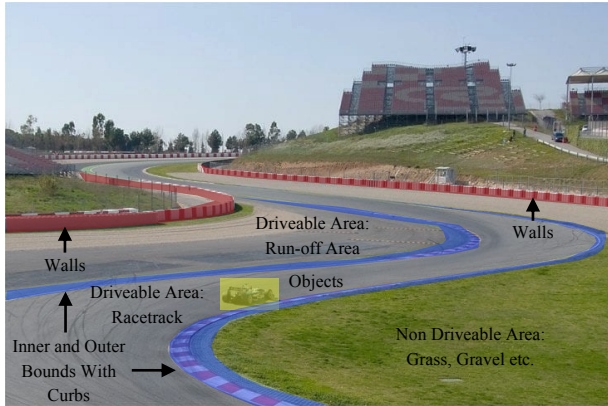


Fig. 2. Racetrack with environmental specifics: Inner-and outer bounds, racecar objects, walls and run-off area

A racetrack normally provides some specifics that can not be found on normal streets. As depicted in Figure 2, a racetrack consists of a single lane that is the main driveable space. This lane is defined by an inner and outer bound that can consist of additional curbs in the turns. On both left and right side of the track there are zones consisting of grass, gravel or tarmac (run-off area) where racecars can drive in an evasive maneuver or if they miss the race line. The racetrack is finally surrounded by walls. Depending on the racing series these types of the racetrack features can vary (e.g. Formula E: no gravel or grass). We define the fundamental problems for autonomous racing perception as the following:

- High speed object detection.
- High speed localization and state estimation.
- Localization on wide areas without specific landmarks.
- Precise localization information necessary to achieve high dynamic trajectory planning and control.

Although the racetrack provides a very simple structure with a single driveable lane, the long distance to the walls and non-existing landmarks make this environment quite difficult to perceive. None of the displayed papers are using pre-created High-Definition Maps (HD-Maps) that are known from passenger autonomous driving development. An open-source library [77] of racetracks provides a simple 2D-birds-eye-view with inner and outer bounds (x - and y -Position) of about 30 racetracks around the world that can be used for planning but not for localization. In Nobis et al. [134] an adaption and enhancement of well-known simultaneous localization and mapping (SLAM) algorithms (*Google Cartographer* [236], *GMapping*) are displayed to create a map of large-scale outdoor environments. Palafox et al. [142] use a vision-based method to detect the free space when no lane lines are present by only using camera images and depth information as input for a DNN.

Most perception research for autonomous racing is listed in the field of localization techniques. Although many research vehicles are equipped with differential GPS (dGPS) that delivers a high localization accuracy, the goal of many autonomous racing researchers is to deliver software based localization solutions only. Both [25] and [68] are using a 1:10 scale vehicle for their localization techniques. While Brunnbauer et al. [25] use the camera to detect cones that create features to enhance the odometry localization, Gotlieb et al. [68] map the track with an onboard 2D-LiDAR and run a Robot Operating System (ROS) based Adaptive Monte Carlo Localization (AMCL). The same AMCL approach is also used and adapted by Stahl et al. [174] to run on the Roborace research vehicle. By using pregenerated maps based on LiDAR data, the car achieves a mean absolute lateral error of 0.086m at a velocity of 150 km/h. A comparison to this work is done in [210] where odometry, GPS and LiDAR data is fused in a Kalman Filter (KF) based on a purely kinematic vehicle dynamics model to achieve localization at high speeds. The Roborace vehicle is also used for the localization research of Renzler et al. [155], Zubaca et al. [220] and Schratter et al. [225]. To increase the localization performance at high speeds the distortion of the LiDAR measurement is analyzed and a compensation is proposed in [155]. It is shown that this correction can be implemented straightforward and has a high benefit for objects moving at faster speeds. The work from Zubaca et al. [220] presents an extended H_∞ Filter (EHF) based on a kinematic motion model assuming constant turn-rate and acceleration to fuse LiDAR, IMU (inertial measurement unit), and vehicle dynamic sensors' measurements. The proposed EHF shows slightly better estimation performance in high dynamic driving scenarios in comparison to an extended Kalman Filter (EKF). In [225] a complete process for both mapping and localization on racetracks with the Normal Distributions Transform (NDT) method is displayed. Based on this approach the Roborace vehicle reaches up to 122 km/h and an average localization error of 0.2 m. Massa et al. [127] are using two multi-rate EKFs and an extended AMCL that exploits some a priori knowledge of the environment on the Roborace vehicle.

TABLE I
OVERVIEW OF RESEARCH IN THE FIELD OF AUTONOMOUS RACING PERCEPTION

Name and Reference	Year	Perception Category	Method	Sensor Type	Tested on Hardware	Racing Series	Max. Speed (km/h)
Nobis et al. [134]	2019	Mapping	SLAM	LiDAR	Yes	Roborace	30
Palafox et al. [142]	2019	Free Space Detection	Semantic Segmentation	Camera	No	Roborace	-
Valls et al. [191]	2018	Localization	SLAM, EKF	LiDAR; Odometry	Yes	FSD	80
Brunnbauer et al. [25]	2019	Localization	Cone Detection	Camera	Yes	FITENTH	-
Gotlieb et al. [68]	2019	Localization	AMCL	LiDAR; Odometry	Yes	FITENTH	-
Stahl et al. [174]	2019	Localization	AMCL	LiDAR	Yes	Roborace	150
Wischnewski et al. [210]	2019	Localization	Kalman Filter	GPS; LiDAR; Odometry	Yes	Roborace	150
Massa et al. [127]	2020	Localization	EKF, AMCL	LiDAR; Odometry	Yes	Roborace	200
Renzler et al. [155]	2020	Localization	Distortion correction	LiDAR	Yes	Roborace	90
Zubaca et al. [220]	2020	Localization	H ∞ Filter	LiDAR; Odometry	Yes	Roborace	60
Schratter et al. [225]	2021	Localization	NDT	LiDAR	Yes	Roborace	122
Gosala et al. [67]	2019	Localization	SLAM	LiDAR; Odometry	Yes	FSD	90
Andresen et al. [10]	2020	Localization	GraphSLAM; Cone Detection	Camera; LiDAR; Odometry	Yes	FSD	-
Srinivasan et al. [172]	2020	Localization	RNN	Odometry; Vehicle Data	Yes	FSD	40
Le Large et al. [116]	2021	Localization	Graph SLAM; EKF SLAM	LiDAR	Yes	FSD	-
Peng et al. [147]	2021	Localization	GraphSLAM; Cone Detection	Camera; LiDAR; Odometry	Yes	FSD	-
Strobel et al. [179]	2020	Object Detection & Localization	YOLO v3	Stereo camera and Monocular camera	Yes	FSD	-
Dhall et al. [46]	2019	Object Detection	YOLO v2	Camera	Yes	FSD	-
De Rita et al. [45]	2019	Object Detection	Tiny-YOLO; Proteins	Camera	Yes	FSD	-
Puchtler et al. [151]	2020	Object Detection	SSD MobileNet v2	Camera	Yes	FSD	-
Dodel et al. [47]	2021	Object Detection	Dataset	Camera	Yes	FSD	-

The authors showed that the pose error heavily depends on the car's velocity, and varies in average from 0.1 m (at 60 km/h) to 1.48 m (at 200 km/h) laterally and from 1.9 m (at 100 km/h) to 4.92 m (at 200 km/h) longitudinally.

For Formula Student Driverless (FSD) vehicles Le Large et al. [116] show a comparison between GraphSLAM and an EKF-SLAM. Based on their experimental analysis with the FSD vehicle and the maps generated by the algorithms they showed that GraphSLAM outperforms EKF-SLAM in terms of accuracy. In [10], [67], [191] the localization and mapping approaches for the FSD vehicle of the AMZ team is presented. While in [67] only a LiDAR based SLAM was used, the student team extended the work with an additional LiDAR and camera based object detection for cones on the track [10]. With this setup the team achieved a velocity of 10 m/s while doing mapping, localization and planning at the same time with an RSME error of 0.29 m. On the same vehicle a recurrent neural network (RNN) was applied [172] to derive an accurate velocity estimation. By taking different vehicle sensors (e.g. IMU, wheel encoder) into account this learning based approach reached 15x better performance than an EKF approach with an RSME of $v_x = 0.141$ m/s and $v_y = 0.059$ m/s.

The current state of the art in autonomous racing is heavily based on single vehicle races. Therefore the subcategory of object detection algorithms for high speed applications was not given much attention. Nevertheless, in the FSD competition teams need to detect both color and form of cones to let the vehicle drive autonomously as depicted in Figure 3. In [45] a case study with different convolutional neural network (CNN) methods (Tiny-YOLO, Proteins) are done in comparison to a

YOLO v2 setup [46] to display the best approach for cone detection in the FSD scenario. Strobel et al. [179] present a combination of a YOLO v3 based object detection, pose estimation, and time synchronization that uses data from both stereo and monocular cameras. Furthermore, besides these software focused developments the authors of [151] evaluated the performance and energy consumption of popular, off-the-shelf commercial devices for DNN inference in the formula student context. Finally, to help and support other FSD teams in their development, Dodel et al. [47] presented a collaborative dataset for vision-based cone detection systems that is open-source available.

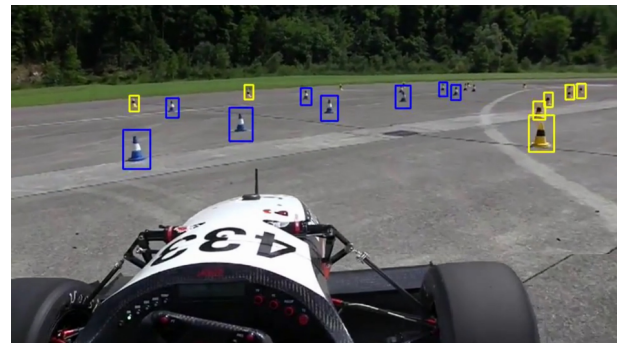


Fig. 3. Exemplary cone detection in the Formula Student Driverless competition. The racetrack is defined by a left boundary (blue cones) and a right boundary (yellow cones) which need to be detected by the teams.

B. Planning

In the following subsection we cover algorithms that plan trajectories for the autonomous race vehicle to drive around the racetrack. Strategies that drive the vehicle end-to-end directly from perception to actuation is excluded from this part and is discussed with further details in Subsection II-D. We split the discussion into the three following parts.

Global planning provides an optimal path, better known as *raceline* (depicted in Figure 4), around the racetrack. In the context of racing, global planning often optimize for the lowest lap time. Therefore, when following this raceline, the car drives an optimal path around the racetrack – under the constraints of the raceline generation – as fast as possible.

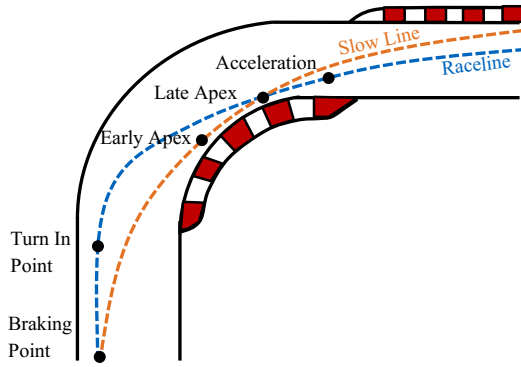


Fig. 4. Theory of raceline (blue) and slow line (orange) on the racetrack. The raceline provides the global fastest path around the complete racetrack.

Local planning (or *motion planning*) plans on a finer granularity compared to global planning, usually under the assumption that an optimal global trajectory is provided. Local planners operate in a certain time horizon, and aim to avoid obstacles while still provide a fast and reliable path that does not deviate too much from the optimal global raceline.

Finally, *behavioral planning* provides information about the high-level mission planning of the racecar. This can include the decision making about overtaking maneuvers (overtaking left/overtaking right/stay behind), the energy management strategy, interaction with other vehicles and the reaction to inputs from race control (e.g. flags, speed limits). As a summary, Table II provides an overview of research efforts in the field of planning for autonomous racing. We define the fundamental problems for autonomous racing planning as the following:

- Minimum-time optimization for a global optimal raceline.
- Long local planning horizon for recursive feasibility.
- Obstacle avoidance and vehicle reaction at high speeds.
- High re-planning frequency for real-time capability.
- Decision making under high uncertainty.
- Interaction planning with non-cooperative agents.

Global Planning

Research from the field of global planning can be roughly divided into different strategies using the objectives of the overall optimization: lap time, geometric properties of the race lines, or energy spent. Racing, as a context for optimization, provides a clear measure of quality in lap time t_{lap} on

participating agents. So naturally lowering t_{lap} is a popular choice when it comes to global planning (Figure 5).

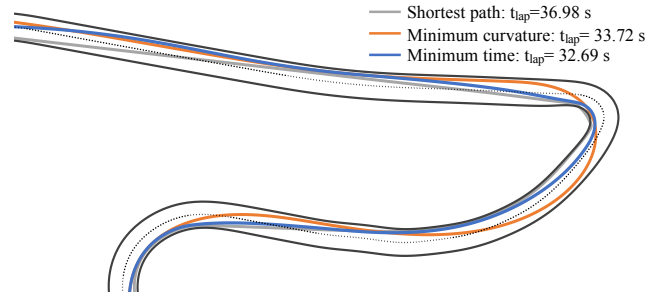


Fig. 5. Comparison of global optimal raceline algorithms based on shortest path, minimum-curvature [76] and minimum-time [41] optimization, which lead to different lap times t_{lap} and trajectories.

A first category of global planning approaches is the usage of variations of Evolutionary Algorithms (EAs) to optimize for lap times. This approach is used in [22], [139], [152] with different parameterizations of the search spaces. In these category, an individual “gene” models a complete configuration of the racing environment, and sometimes vehicle hardware and software. The algorithms also require evaluation functions to gauge the performance of an individual; here, this is the simulated lap time given a configuration. Initially, a pool of genes (referred to as a population) is created by sampling the search space. Then, in each iteration of the algorithm, genes are evaluated, and mutations are performed following different strategies depending on the specific algorithm. Eventually, the individuals in the population should converge, and a best configuration for the global optimal raceline is found.

Another popular approach when optimizing for lap times as the objective function is to form an optimal control problem (OCP), usually non-linear. The OCP uses the race vehicle’s lap times as the objective function, and respects constraints of the geometry and friction limits μ_{max} of the race track as well as the dynamics and control limits of the racecar. Different proposed approaches usually choose different vehicle dynamic models, and different solvers to solve the optimization problem. Metz et al. [128] formulate an OCP where the objective is the lap time, and solutions are found by quasi-linearization with integral penalty functions, and splicing of constrained and unconstrained arcs to form a two-point boundary value problem. Kelly et al. [104] use Sequential Quadratic Programming (SQP) to solve the non-linear programming problem where lap time is the objective. Ruocco et al. [160] formulate an OCP where the objective is the lap time. By reformulating the objective with eliminating explicit time step terms, the problem becomes a fixed-horizon free-endpoint problem. Projection operator-based Newton’s method is ultimately used for the trajectory optimization. Theodosis et al. [186] initialize the optimization problem with a path created by connecting center line on the straights and clothoids between the center lines. The sequential gradient based, non-linear optimization then uses the lap time as the cost function to find an improved global race line. Pagot et al. [141] present a non-linear model-predictive framework to formulate a optimal control problem

TABLE II
OVERVIEW OF RESEARCH IN THE FIELD OF AUTONOMOUS RACING PLANNING

Name and Reference	Year	Planning Category	Method	Tested on Hardware	Racing Series
Metz et al. [128]	1989	Global Planning	Near time optimal control	No	-
Graghin et al. [23]	2008	Global Planning	Optimization (Min. Curvature)	No	-
Kelly et al. [104]	2010	Global Planning	Time optimal control	No	-
Cardamone et al. [36]	2010	Global Planning	Optimization (Min. Curvature)	No	-
Quadflieg et al. [152]	2011	Global Planning	CMA-ES (Min. time)	No	-
Theodosis et al. [185]	2011	Global Planning	Multi-phase Geometric based	Yes	-
Theodosis et al. [186]	2012	Global Planning	Non-linear Optimization (Min. time)	Yes	-
Rucco et al. [160]	2015	Global Planning	Optimization (Min. time)	No	-
Bevilacqua et al. [22]	2017	Global Planning	Particle Swarm Optimization	No	-
Kuhn [111]	2017	Global Planning	Geometric methods	No	-
Dal Bianco et al. [43]	2018	Global Planning	Optimal Control (Min. time)	No	-
Heilmeier et al. [76]	2019	Global Planning	Optimization (Min. Curvature)	Yes	Roborace
Herrmann et al. [82], [83]	2019	Global Planning	Optimization (Min time+energy)	Yes	Roborace
Herrmann et al. [84]	2020	Global Planning	Optimization (velocity)	Yes	Roborace
Pagot et al. [141]	2020	Global Planning	NMPC (Min. time)	Yes	-
Vazquez et al. [193]	2021	Global Planning	Optimization (Min. time) + NMPC	Yes	FSD
Lovato et al. [125]	2021	Global Planning	Apex-finding + Optimal control	No	-
Butz et al. [30]	2009	Local Planning	CMA	No	-
Jeong et al. [92]	2013	Local Planning	RRT*	No	-
Liniger et al. [117]	2014	Local Planning	NMPC	Yes	1:43
Liniger et al. [118]	2015	Local Planning	Viability theory + MPC	Yes	1:43
Anderson et al. [9]	2016	Local Planning	MPC	No	-
Kapania et al. [100]	2016	Local Planning	Convex Optimization	Yes	-
Williams et al. [203]	2016	Local Planning	MPPI	Yes	Autorally
Buyal et al. [31]	2017	Local Planning	Nonlinear MPC (NMPC)	Yes	Roborace
Funke et al. [61]	2017	Local Planning	MPC	Yes	-
Arslan et al. [11]	2017	Local Planning	CL-RRT#	No	-
You et al. [215]	2018	Local Planning	Trail braking	No	-
Subosits et al. [180]	2019	Local Planning	Convex Optimization	Yes	-
Stahl et al. [175]	2019	Local Planning	Graph search + spline opt.	Yes	Roborace
Alcal et al. [8]	2020	Local Planning	LPV-MPC	No	-
Bulsara et al. [29]	2020	Local Planning	RRT+MPC	Yes	F1TENTH
Feraco et al. [55]	2020	Local Planning	RRT + Stanley	Yes	FSD
Srinivasan et al. [173]	2021	Local Planning	Holistically designed hierarchical controllers	Yes	FSD
Evans et al. [52], [53]	2021	Local Planning	TD3	No	F1TENTH
Kalaria et al. [229]	2021	Local Planning	NMPC	No	-
Brüdigam et al. [232]	2021	Local Planning	MPC + Gaussian	No	-
Bhargav et al. [230]	2021	Local Planning	MPC	No	-
You et al. [216]	2021	Local Planning	Trail braking	No	-
Wang et al. [233]	2021	Local Planning	MPC + Deep-Koopman	Yes	F1TENTH
Jung et al. [223]	2021	Local Planning	MPC + Game Theory	No	IAC
Loiacona et al. [124]	2010	Behavioral Planning	Reinforcement Learning	No	-
Kloeser et al. [106]	2020	Global+Local Planning	NMPC	No	-
O'Kelly et al. [139]	2020	Global+Local Planning	CMA-ES + Spline opt.	Yes	F1TENTH
Williams et al. [204]	2017	Local+Behavior Planning	Best response + MPPI	Yes	Autorally
Notomista et al. [135]	2020	Local+Behavior Planning	Iterated Best Response + CBF	No	-
Wang et al. [199]	2020	Local+Behavior Planning	Iterated Best Response	No	-
Sinha et al. [168]	2020	Local+Behavior Planning	EXP3 + Dist. robust opt.	Yes	F1TENTH
Liniger et al. [122]	2020	Local+Behavior Planning	Non-cooperative game	Yes	1:43
Wang et al. [198], [200]	2021	Local+Behavior Planning	Iterated Best Response + Spline opt.	Yes	-
Schwarting et al. [167]	2021	Local+Behavior Planning	Belief-space Planning	No	-

where time is the objective. Vazquez et al. [193] formulate a minimum-time optimal control problem by using the centerline of the race track and discretize the continuous space dynamics. Two regularization terms with slip angle cost and a control input rate of change cost are also included in the objective function for reducing the lap time. Hermann et al. [82]–[84] formulate an optimal control problem where the lap time, the path, the velocity profile and the energy consumption is included in the objective function. By formulating a multi-parametric SQP it is possible to find the optimal velocity plan along a race line while not violating dynamic and energy requirements of the drivetrain. Finally, the authors of [125]

devise a apex-finding method and calculates the optimal time global race line by solving an OCP.

Some researchers show approaches of calculating the race line by satisfying certain geometric properties. Usually, the assumption that vehicles experience lateral acceleration that results in lateral tire forces is made when it comes to autonomous racing. It is then often desirable to minimize the lateral acceleration to minimize the possibility of side slip. In these cases, the aim is to find a race line with the *minimum-curvature* overall. However, it is widely known that the least curvature path is not the ideal path for a racecar which is asymmetric in braking and acceleration and is operated in a

combined slip range. Braghin et al. [23] create design and solve a dynamic problem to find the best compromise between the shortest track and the least curvature track based on the vehicle's dynamic behavior. Similarly, Cardamone et al. [36] also try to find the compromise between the same conflicting objectives, but use a Genetic Algorithm (GA) to find the best weighting parameter between the two objectives. Heilmeier et al. [76] extends the work of Braghin et al. [23] to solve a quadratic optimization problem where constraints on vehicle dynamics limits are set up to find the minimum-curvature path around the race track. This approach is compared to the minimum-time optimization of [41]. For the same racetrack [76] achieves a laptime of $t_{lap} = 86.13$ s while [41] is even faster with $t_{lap} = 84.90$ s. The advantage of the minimum-curvature planning is obviously the reduced set of parameters for the vehicle dynamics model and the faster calculation time.

Lastly, some approaches also choose to mimic the geometric properties of a race line driven by human drivers. These approaches often break a turn down into different sections and require race lines to satisfy different properties in different sections. Kuhn [111] mimics the behavior of a racecar driver by defining the same important decision making points on the track. It calculates the race line by first fixing the locations of the following points: the braking points, turn-in points, apex points, turn-out points, and accelerations points. Then a piecewise rational spline function is used to interpolate all the points and create a race line. Theodosis et al. [185] mimic the three phase cornering technique used by professional drivers. It first finds all straights along the track, and linking the straights with curve structures. Then, each connecting curve is found by combining clothoids and a circular arc. The parameters are adjusted to minimize the overall curvature and ensure the path is tangent to the following straight.

Local Planning

In local planning, the main objective is to plan the cars motion for a fixed horizon by avoiding collisions with either the environment or adversaries (Figure 6). There are three main strategies:

- 1) Modifying the global plan via optimization.
- 2) Sample multiple dynamically feasible trajectories and select the best one around obstacles.
- 3) Sample in the free space around obstacles to find a feasible trajectory.

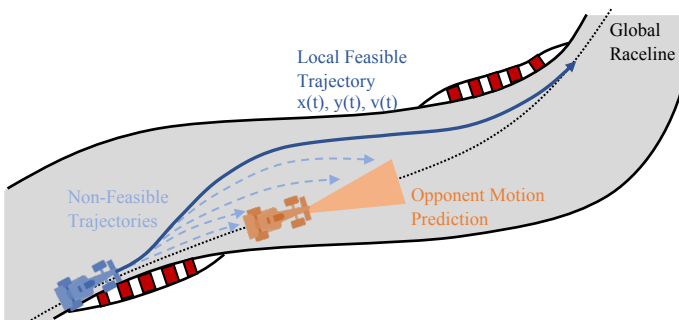


Fig. 6. Local trajectory planning on the racetrack: The vehicle needs to prediction the opponents motion, plans a feasible trajectory around the opponent and stick closely to the global raceline.

From the state of the art we could deduce that many authors use Model Predictive Control (MPC) methods for local trajectory planning. Although this method is control technique, it is also suitable for planning a local trajectory. In this section, we present work that is on the very thin and fluid boundary between planning and control, but which is mainly addressing the planning problem. Pure path tracking with MPC is described later in Subsection II-C.

In the first category, the global plan is modified to allow for obstacle avoidance. In these types of formulations, model predictive controllers are usually utilized to optimize the global plan. Upon encountering an obstacle or opponent vehicle, the constraints or cost functions of the optimization problem is modified, and a new motion plan is formulated. Anderson et al. [9] switch between two MPC modes to optimize for minimum-time objective or maximum velocity objective to mimic a professional driver. Kapania et al. [100] first find the optimal velocity profile given a reference path, and then updates the given path with the fixed velocity profile to find the minimum-curvature path by solving a convex optimization problem. Williams et al. [203] propose a sampling based MPC that relies on path integral control for entropy minimization. In [61] a planner is presented that is capable of mediating between conflicting objectives when performing collision avoidance, vehicle stabilization, and path tracking. Subosits et al. [180] present a real-time trajectory planning algorithm by approximating a re-planning problem as a convex quadratically constrained quadratic problem (QCQP) with a simplified point-mass model. Alcal et al. [8] reformulate the non-linear vehicle dynamics in a Linear Parameter Varying (LPV) form. This can then be used to create a convex optimization problem which is easier to solve for search for a local path. Kaloria et al. [229] use a nonlinear-MPC (NMPC) for local planning where the objective consists of progress along the race line, avoiding collision, and use drafting (reduce drag) to make progress. Brüdigam et al. [232] use a Gaussian Process (GP) to predict the opponent's maneuver. These stochastic information is then used in a Stochastic MPC to plan efficient overtaking maneuvers.

In the second category, multiple motion primitives, or prototype motion plans, are generated by forward simulating the vehicle dynamics given the current state of the vehicle using multiple different actuation input sequences. This usually results in multiple splines or arcs to select from. In addition, cost functions are used to give each primitive an attached value. With a search for the best (lowest/highest) cost in these primitives a final trajectory can then be chosen. Liniger et al. [117], [118] generate a library of trajectories by forward simulating the vehicle using a grid of vehicle velocities and steering angles up to a certain horizon. Stahl et al. [175] propagate the race track with a graph that covers the entire space. The nodes are first placed equidistantly along cross sections of the race track, then edges connecting nodes are created by optimizing for cubic clothoids. This planner was tested on the Roborace vehicle and achieved $v_{max} = 223$ km/h with an update rate of 16.8 Hz on and NVIDIA Arm electrical control unit (ECU). O'Kelly et al. [139] use a uniform grid of points along the global race line as local goal points. Afterwards

cubic clothoids are optimized to connect the vehicle's current state and the grid points which leads ultimately to planning a local trajectory. Finally in [168] a set of local goal points in front of the vehicle is sampled with the help of a normalizing flow method. Again, cubic clothoids are optimized here to connect the vehicle's current state and the grid points to derive a driveable trajectory.

In the third category, sampling-based methods are used. These approaches randomly sample the free space around the current state of the vehicle for goal states. Once a available goal state is found, a motion plan is then generated connecting the current state of the vehicle with the selected goal state. By introducing randomness in the sampling process, these algorithms are usually efficient, but do not provide guarantees on their optimality. Jeong et al. [92] combine the rapidly-exploring random tree (RRT*) method with a local steering algorithm utilizing the dynamic model of the vehicle. Arslan et al. [11] combine RRT with closed-loop prediction based on the vehicle model, and incorporate relaxation methods for efficient construction of a tree that guarantees asymptotic optimality. Feraco et al. [55] combine RRT with Dubins curve to generate dynamically feasible local plans. Finally, Bulsara et al. [29] use RRT to find collision free reference paths in the free space.

Behavioral Planning

In behavior planning, the focus is usually on high-level decision making on tasks such as selecting an appropriate weighting of different objectives, or selecting plans that impedes the progress of opponents. The research in this area mainly focuses on two different strategies:

- 1) Assigning multiple cost functions with weighting and selecting the plan with the lowest overall cost.
- 2) Combine the local planner with game theoretic methods.

In the first category, cost functions are used that represent specific racing values like progress along the track, proximity to the obstacles, effort for control inputs and the deviation from optimal global plan. An overall cost is then found by combining all cost functions for each candidate local trajectory. Cost functions could also incorporate hard constraints by eliminating unqualified plans. Finally, the trajectory with the minimum overall cost is chosen to be the local trajectory. Liniger et al. [117] use the prototype trajectory without collision and makes the largest progress along the track. This approach is then extend in [118] by applying viability kernels on the track which only generates viable trajectories. O'Kelly et al. [139] assign cost functions representing proximity to the global plan, collision with the environment to prototype trajectories and select the best one. Finally, Sinha et al. [168] assign cost functions for progress along the track, overall curvature, maximum velocity, and collision with predicted opponent motion to all prototype trajectories.

In the second category, game theoretic approaches are used to usually find the best action in a two or multiple player game. The continuous motion planning problem is usually transformed into a step-by-step game where each player is allowed to make a "move" one by one. These approaches usually incorporate the concept of regret to try to find the best response for winning the racing game either immediately

or in the long run. Williams et al. [204] combine a best response model of the opponent behavior with variation of MPC by including predicted opponent trajectories into the cost of other vehicles. Notomista et al. [135] propose sensitivity-enhanced Nash equilibrium seeking, which uses iterated best response algorithm to optimize for a trajectory in a two car racing game. In [199] a iterated best response with Nash equilibrium approximation is used to plan receding horizon trajectories. This technique helps to maximally advance the racecar along the track while taking into account opponent's intentions and responses. Sinha et al. [168] build a library of opponent prototypes offline and uses the EXP3 algorithm to solve for a multi-armed bandit problem to approximate the current opponent by using the library. Liniger et al. [122] repeat the multi-player game in a receding horizon fashion, which results in a sequence of coupled games. With this non-cooperative game approach the authors could show that the vehicles create blocking maneuvers although the risk of a collision gets higher. Wang et al. [200] use sensitivity enhanced iterated best response to seek convergence to the Nash equilibrium in the joint trajectory space for all agents. Finally, Schwarting et al. [167] use local iterative Dynamic Programming (DP) in belief space to solve a continuous Partially Observable Markov Decision Process (POMDP).

C. Control

In the previous subsection, we discussed how to compute either a global or local trajectory on the racetrack. The trajectory includes both a path ($x(t)$, $y(t)$ - position) and velocity profile $v(t)$ which provides the reference information for the *lateral and longitudinal control*. In what follows, we provide control methodologies that leverage such a reference trajectory to compute control actions to navigate the car along the waypoints. The goal is to reduce the lateral and heading error to stay as close to the reference line and to reduce the velocity error to be as fast as possible (Figure 7).

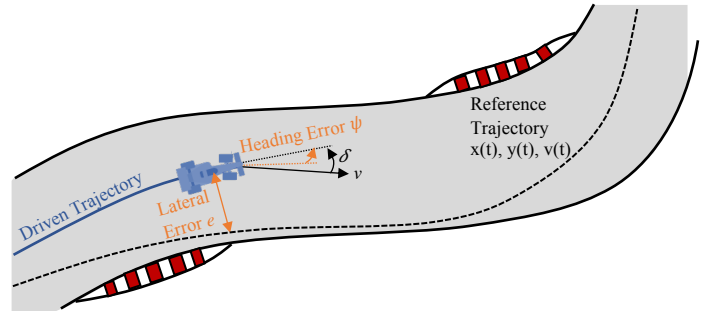


Fig. 7. Control task in an autonomous racecar. The goal is to reduce lateral and heading error while following a global optimal raceline as a reference trajectory.

At this level of abstraction, the control actions are usually the steering angle δ and a throttle or brake request (acceleration commands a_{long}) that are sent to low-level controllers for actuating the motor and the brakes. We denote $x^{ref}(t)$ as the state associated with the reference trajectory at time t , and our goal is to design a controller policy π that, given the current

state of the vehicle at time t , denoted as $x(t)$, and the reference state $x^{\text{ref}}(t)$, computes the control input $u(t)$.

Table II-C gives an overview of the papers that address the control problem for autonomous racing. The control papers try to address the issue of "handling at the limits" and follow the raceline/reference trajectory as accurate as possible. We define the fundamental problems for autonomous racing control as the following:

- High accurate path tracking for low lateral errors.
- High accurate path tracking for low heading errors.
- High accurate velocity tracking for fast lap times.
- Stable vehicle behavior at high accelerations.
- Exact modelling of the nonlinear vehicle behavior.
- High control frequency for real-time high speed driving.

For a better overview and understanding of the different types of control research we decided to split the papers into six subsections.

Classic Control

Firstly, we survey papers that cover classical and well-known principles in the field of path and velocity tracking. Ni and Hu [131] present a path following controller for their FSD vehicle. Their overall controller architecture consists of longitudinal, lateral and yaw controllers that operate the vehicle on a predefined G-G diagram (maximum lateral and longitudinal acceleration.) In both [183] and [182] we see the usage of a simple lookahead controller that provides path tracking at high speeds event at the limits of tire adhesion. In [109] an autonomous racing controller is presented that uses the vehicle's centre of percussion (COP) to design a feedforward and feedback steering. This showed how to simplify the equations of motion and highlights the challenge of controlling a vehicle with highly saturated tires. Furthermore, a special focus on path tracking at the tire/vehicle limits is presented in the work of [57], [98], [110], [112]. While the research of [110] and [57] displays the usage of a G-G diagram to display controllers that operate the vehicle at the limits, Laurence et al. [113] presents a slip angle-based control strategy to maintain the front tires at a certain slip angle to create the maximum tire forces. A special focus on longitudinal control (speed control) is shown in [108], [112], [146]. Laurence et al. [112] presents a control framework for full tire-force utilization with slip-angle based steering control, combined with explicit control of the path-tracking dynamics through longitudinal speed feedback to achieve a better path tracking. In [146] a model-free nonlinear controller for longitudinal speed control is presented. In this approach, a dynamic reconstruction of information on the vehicle's motion concerning the inputs acting on the system with sensor data is displayed. With this its possible to reconstruct the maximum longitudinal tire forces for current states which can be used for accurate speed tracking. Finally, in both [195] and [196] additional sensitivity analysis of path controlling at the limits and high sideslip maneuvers are displayed.

Model Predictive Control

The second and most-popular strategy used to synthesis autonomous racing controller is *Model Predictive Control*. In MPC a sequence of control actions is computed by forecasting

the future trajectory of the vehicle over a short time window. In particular, given the state of the system x_t , an MPC solves a *Finite Time Optimal Control Problem (FTOCP)* to compute an optimal sequence of states $\{x_t^*, \dots, x_{t+N}^*\}$ and inputs $\{u_t^*, \dots, u_{t+N-1}^*\}$ over a fixed horizon N . In autonomous racing the objective of the optimal control problem is to either track a global reference trajectory or to minimize the lap time. Upon computing such sequence of optimal states and actions, the first control action u_t^* is applied to the system and the process is repeated at the next time step based on the updated state x_{t+1} . MPC-based methodologies are the main method behind several autonomous racing controller which have been implemented on real vehicles. The advantages of MPC are that 1) forecast is used to act proactively and to 2) feedback is naturally incorporated in the controller that repeatedly updates the optimal trajectory. Notice that when the planning horizon N is short, the planned trajectory may not account for the future behavior of the system and as a result the controller may take shortsighted control actions. However, computing such quantities that exactly approximate the cost and constraint beyond the prediction is challenging. In practical applications it is preferred either to use a long prediction horizon [119] or to approximate these quantities based on historical data [159].

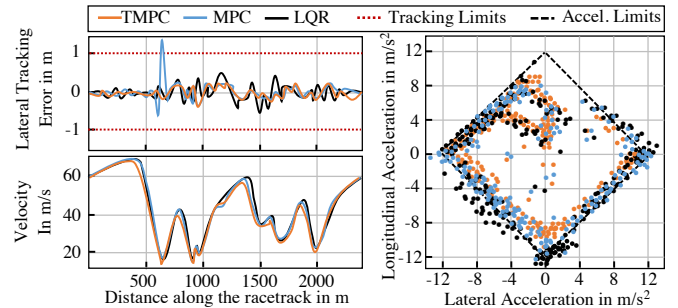


Fig. 8. Qualitative comparison of an LQR, MPC and Tube MPC controller in an autonomous racing setup based on [213]. While the MPC is outperforming the LQR controller, it can be seen the the Tube-MPC is not violating any dynamical constraints e.g. the maximum lateral and longitudinal acceleration.

In [203] a sampling based MPC algorithm is derived. This so called *Model Predictive Path Integral Control (MPPI)* algorithm is using the methodology of path integral control that derives an optimal control based on stochastic sampling of trajectories. It is demonstrated that this approach explicitly provides a formula for the controls over the entire time horizon and that it relaxes the usual condition between control authority and noise required in path integral control. The authors use this fundamental control approach and enhance it with additional decision maker [62], game theory [206], DNNs [49] and reinforcement learning [205] methods to derive further improvements.

Carrau et al. [37] present a *sparse Randomized MPC (SRMPC)* approach that is based on a *Stochastic MPC*. This approach is used to deal with model uncertainty at high speeds and high accelerations. While driving with the vehicle it collects data along the track which is then used to identify the model uncertainty probabilistically. This tightens the constraints for the MPC automatically while still having the size

TABLE III
OVERVIEW AND CATEGORIZATION OF RESEARCH PAPER IN THE FIELD OF CONTROL FOR AUTONOMOUS RACING

Name and Reference	Year	Control Category	Method	Tested on Hardware	Racing Series
Voser et al. [195]	2010	Classic Control	Controller Analysis	Yes	-
Kritayakirana et al. [108]	2010	Classic Control	Feedforward Longitudinal Controller	Yes	-
Talvala et al. [183]	2011	Classic Control	Lookahead control	Yes	-
Kritayakirana et al. [109], [110]	2012	Classic Control	COP feedforward and feedback steering	Yes	-
Kapania et al. [98]	2015	Classic Control	Feedback-feedforward steering controller	Yes	-
Park et al. [144]	2015	Classic Control	Convex optimization	Yes	-
Laurense et al. [112], [113]	2017, 2018	Classic Control	Slip angle-based control strategy	Yes	-
Ni et al. [131], [132]	2017, 2019	Classic Control	Controller Framework	Yes	FSD
Fu et al. [57]	2018	Classic Control	Maximize GG Diagram	Yes	FSD
Chatzikomis et al. [38]	2018	Classic Control	Torque Vectoring	Yes	Roborace
Wachter et al. [196]	2020	Classic Control	Controller Analysis	No	-
Pedone et al. [146]	2020	Classic Control	Model-free nonlinear control	No	-
Sukhil et al. [182]	2021	Classic Control	Adaptive Lookahead for Pure Pursuit	Yes	F1TENTH
Beal et al. [16]	2012	Model Predictive Control	Model Predictive Envelope Control	Yes	-
Williams et al. [203]	2015	Model Predictive Control	Model Predictive Path Integral Control (MPPI)	No	-
Carrau et al. [37]	2016	Model Predictive Control	sparse Randomized MPC	Yes	1:43 car
Verschueren et al. [194]	2016	Model Predictive Control	Nonlinear MPC (NMPC)	No	-
Drews et al. [49]	2017	Model Predictive Control	MPPI + CNN	No	-
Liniger et al. [119]	2017	Model Predictive Control	sparse Randomized MPC	No	1:43 car
Williams et al. [204], [206]–[208]	2017, 2018	Model Predictive Control	MPC+ Game Theory, MPC + RL, Sampling based MPC	No	AutoRally
Novi et al. [136]	2019	Model Predictive Control	Hierarchical Nonlinear MPC (NMPC)	No	-
Liniger et al. [121]	2019	Model Predictive Control	MPC + Viability Theory	Yes	1:43
Brown et al. [24]	2020	Model Predictive Control	Nonlinear MPC (NMPC)	Yes	-
Liu et al. [123]	2020	Model Predictive Control	Standard MPC	No	FSD
Alcal et al. [7]	2020	Model Predictive Control	Linear Parameter Varying MPC (LPV-MPC)	Yes	-
Gandhi et al. [62]	2021	Model Predictive Control	Robust MPPI (RMPPI)	No	AutoRally
Pour et al. [150]	2021	Model Predictive Control	Linear Parameter Varying MPC (LPV-MPC)	No	-
Wischniewski et al. [213]	2021	Model Predictive Control	Tube MPC (TMPC)	No	Roborace
Li et al. [224]	2021	Model Predictive Control	NMPC + MIQP	No	-
O Kelly et al. [139]	2020	Optimization	CMA-ES	No	F1TENTH
Kapania et al. [99]	2015	Learning Based Control	PD-ILC, Q-ILC	Yes	-
Brunner et al. [27]	2017	Learning Based Control	Learning MPC (LMPC)	No	1:10
Rosolia et al. [156]–[159]	2017, 2020	Learning Based Control	Learning MPC (LMPC)	No	-
Ji et al. [93]	2018	Learning Based Control	DNN + backstepping variable structure control	Yes	FSD
Bujarbaruah et al. [28]	2018	Learning Based Control	Adaptive MPC	No	-
Hewig et al. [86]	2018	Learning Based Control	NMPC + Gaussian Process	No	1:43 car
Wagener et al. [197]	2019	Learning Based Control	Dynamic Mirror Descent MPC (DMD-MPC)	No	AutoRally
Kabzan et al. [96]	2019	Learning Based Control	NMPC + Gaussian Process	Yes	FSD
Wischniewski et al. [211], [212]	2019	Learning Based Control	Controller + Gaussian Process; recursive Least-Mean-Squares algorithm	Yes	Roborace
Vallon et al. [190]	2020	Learning Based Control	Learning MPC (LMPC)	No	-
Jain et al. [90]	2020	Learning Based Control	MPC + Gaussian Process	No	F1TENTH
Kapania et al. [101]	2020	Learning Based Control	PD-ILC, Q-ILC	Yes	-
Van Niekerk et al. [192]	2020	Learning Based Control	Receding Horizon Control + Gaussian Processes	No	-
Xiao et al. [228]	2021	Learning Based Control	Controller DNN +	No	F1TENTH
Hindiyeh et al. [87]	2014	Drifting Control	Controller Framework	Yes	-
Goh Jet et al. [63]–[65]	2016–2019	Drifting Control	Controller Framework	Yes	-
Zubov et al. [222]	2019	Drifting Control	Controller Framework	No	Roborace
Joa et al. [94]	2020	Drifting Control	Controller Framework	No	-
Cai et al. [32]	2020	Drifting Control	Deep Learning	No	-

and structure of a standard MPC problem. The optimization problem is solved in 20 ms for a 1:43 and the results show that for a desired violation the controller achieves faster lap times and fewer constraints violations than a standard MPC algorithm. [119] is building on top of this approach and enhancing it with disturbance feedback policies to optimize over the state feedback matrices.

In order to capture the nonlinear dynamics of the vehicle and tires a *nonlinear MPC* (NMPC) can be designed and modelled [24]. Although this is computationally expensive, with the help

of nonlinear optimization solver like FORCES PRO [241] these type of optimizations can be solved in real-time on the vehicle. In [136] a *hierarchical NMPC* is presented that consists of two controllers: Firstly, a high-level NMPC with point-mass model that simplifies the vehicle dynamics and is constraint by the tire G–G diagram. Secondly, a low-level NMPC with a high-fidelity model uses the output (velocity profile) of the first NMPC as a terminal constraint. This method helps to reduce the prediction horizon and therefore calculate the vehicle dynamics in real-time. Furthermore, this

approach was improved in [193] with a simpler vehicle model to run on a FSD vehicle.

Li et al. [224] use a NMPC with a minimum-time objective and a collision-avoidance constraint. By applying a Mixed Integer Quadratic Programming (MIQP) method a control strategy is created that is optimized regarding the safety and the laptime. The authors conclude that for such an approach the prediction horizon needs to be large enough for creating feasible results although this leads to a higher computation time and is therefore non real-time capable. The authors of [121] combine a low-level MPC with a viability kernel that efficiently generates finite look-ahead trajectories to maximize the progress of the car. At the same time the viability kernel creates trajectories that remaining recursively feasible with respect to static obstacles. The authors apply this algorithm to both a simulation where the effects of various design choices and parameters are identified and showed that a hierarchical controller can be improved by incorporating the viability kernel in the trajectory planning phase.

Beal et al. [16] use estimations of the friction coefficient and vehicle sideslip to define state constraint and unstable vehicle behaviors. This information is utilized in an model predictive envelope controller to create a region of stable vehicle motions. With this approach it is possible to operate the vehicle on the handling and stability limits. Similarly, Wischniewski et al [213] and Williams et al. [208] present a *Tube-MPC* (TMPC) approach where nonlinear effects and external disturbances are taken into account of the MPC design. By approximating a tube of reachable sets over the prediction horizon the vehicle guarantees a space of constraint satisfaction. Finally, because tuning the parameters of a controller is time-consuming and needs experience from experts some researches try to automatically tune the parameters with optimization techniques. In [139] the superoptimization toolchain *TUNERCAR* is presented which is using a Covariance Matrix Adaptation Evolution Strategy (CMA-ES) to optimize both vehicle hardware parameters (center of gravity, mass) and control parameters (P-, I-, D-parameters) of the car. The evaluation is based on the laptime of the car and the algorithm shows the capability of reducing the laptime driven by the car by optimizing these parameters.

Learning Based Control

An additional control strategy to improve the tracking of a reference trajectory is to leverage *Iterative Learning Control* (ILC) based methodologies [5]. ILC methods are useful for applying them to an autonomous race vehicle, since the vehicle is running on the race track repeatedly for multiple laps. In this case the tracking error and vehicle data from previous laps can be used to compute a feedforward correction term that improves the path and velocity tracking performance significantly (Figure 9). ILC-based strategies for autonomous racing have been successfully implemented on full-size vehicles [99], [101].

In [27], [156]–[159] a *Learning MPC* (LMPC) is proposed which is an optimization and data-driven framework to make the car faster every lap and therefore reduce the laptime. The optimal control problem of the MPC is enhanced in a way so it tries to compute a solution by solving at time t of each

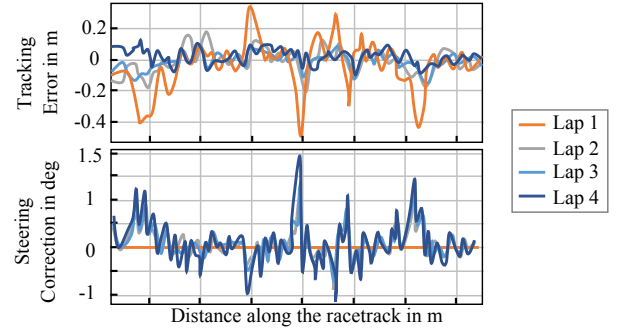


Fig. 9. Qualitative demonstration of a learning-based control approach based on [99]. For each new lap the car is decreasing the tracking error by applying a higher correction steering angle for each vehicle movement.

lap the finite time constrained optimal control problem. This creates a convex optimization problem which can be solved with respective solvers. The authors show that the LMPC finds a faster trajectory for each new lap while maintaining the set constraints.

Hewing et al. [86] present an *learning-based cautious NMPC* which aims to learn from vehicle sensor data with Gaussian Processes to improve the vehicle dynamics model. The GP model is used for regression to identify uncertainties and a mismatch in the vehicle dynamics model parameters based on measurement data. The NMPC is extended with this learning model and reformulated in a stochastic setting which improves the performance and safety of the vehicle at the same time. Furthermore, the authors implement this approach on a FSD vehicle in [96] and demonstrate the implementation and experimental validation of this kind of learning-based control approach. Finally, Jain et al. [90] were using the same approach but only with an extended kinematic vehicle model for the MPC to proof, that this type of learning-based control can also leverage the usage of simplified vehicle models.

Because of the control system quality and unmodelled effects, it is well known that there is a gap between the planned and the driven trajectory. This gap is unknown and depended on the environment the vehicle is driving in. To mitigate this gap, [211] presents a learning control approach on the method of Gaussian Process for a nonlinear regression. This GP learns online, while driving, how big this gap is and then tries close it over the time by using a so called scale-factor. This scale-factor serves as an optimization variable that tries to maximize longitudinal and lateral accelerations each lap.

Finally, the authors of [93] proposed a control scheme that consists of a robust steering controller and a DNN. While the path tracking is done via *backstepping variable structure control* (BVSC) the DNN is integrated to estimate nonlinear functions, e.g. the uncertainty of tire cornering stiffness.

Drifting Control

Although it is not following an optimal raceline, racing head-to-head or striving for the fastest laptime, the field of autonomous drifting is a special subcategory for autonomous racing. Here, the researchers show algorithms that are able to maneuver the car autonomously beyond the stable handling of limits and stabilize the car in a point of high slip

angle. In [87] a successive loop structure is presented as a controller that tracks only the vehicles sideslip based on the yaw rate as a control input. Goh et al. [63]–[65] present a controller framework that is able to drift autonomously with the vehicle while tracking a predefined reference path. This enables drifting maneuvers at special references path, e.g. a circle or figure of 8. The authors using a single track vehicle model [63] and experiment with different variations of control values (sideslip [63], rotation of the vehicle’s velocity vector to track the lateral error [64], [65]) to reach a sideslip angle of up to -40 degree with speeds up to 45 km/h on a real test vehicle. Finally, Joa et al. [94] present a 3-level structure for a drift controller. Firstly, they designed a supervisor which determines rate and rear longitudinal slip ratio for the drift maneuver. Secondly, a upper-level controller calculates lateral force (front) and longitudinal force (rear) for tracking the planned vehicle motion. Finally, a low-level controller converts the commands (forces) defined by the upper-level controller into control inputs for the vehicles (throttle, steering angle). With this setup the authors derived a steady state drifting on a real test vehicle.

D. End-to-End

The previous subsections described in detail which research efforts in the fields of perception, planning and control have been achieved for autonomous racing. Besides that, researchers have tried to set up partial or full *end-to-end* approaches to master the autonomous racing task. As displayed in Figure 10, in the context of autonomous driving end-to-end means that either partial modules or all software modules are completely replaced with data-driven approaches like a DNN.

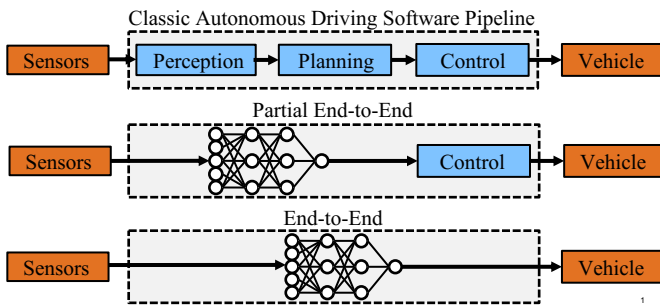


Fig. 10. Classic autonomous driving software pipeline in comparison to partial and full end-to-end software pipeline.

The partial end-to-end approach aims towards replacing or combining modules with a DNN. This has the advantage that the DNN provides a low-dimensional intermediate representation of the racetrack (e.g. a trajectory) that can be then used in a classic control systems (e.g. PID-Controller). In contrast to a full end-to-end system the final actuator output (steering angle, throttle position) is not predicted directly. On the one hand the field of autonomous racing provides a perfect proving ground for end-to-end approaches: clear driveable area, no signage (e.g. traffic lights), one class of objects, clear objective for training (fastest laptime). On the other hand, when using end-to-end systems large data sets are needed to train the DNNs.

This data must contain a wide variety of situations so that the DNN achieves a good level of performance. Similar to other DNN applications the generalization and performance of these systems are the biggest issues. In addition to these common known issues, we define the following main problems for end-to-end autonomous racing:

- Open to question system architecture design: partial vs. full end-to-end.
- Difficulty to learn the vehicle dynamics parameter - especially the nonlinear vehicle and tire dynamics.
- Training purely in simulation environments lead to *simulation-to-reality* gap.
- High amount of various data necessary for training the artificial networks.
- Out of distribution events can cause drastic failure cases: Driving at high speeds is rare and thus learning how to correctly react is difficult

In the following we present research efforts that use end-to-end approaches for autonomous racing which are summarized in categories in Table IV.

Perez et al. [148] derives the control commands based on a rule-based evolutionary strategy. Although the car is driving successfully around the racetrack and follows a raceline the controller is only able to handle low speeds. In both [161], [163] the authors propose two fuzzy controllers for calculating the steering angle and computing the target speed of the car based on sensor information in the TORCS simulator [237]. In Olivera et al. [140] Bayesian optimization (BO) is used to find a control policy that minimises the time per lap while keeping the vehicle on the racetrack. The BO helps to search more efficiently over high-dimensional policy-parameter spaces an outperforms other evolutionary algorithms.

A solution for a partial end-to-end approach is presented in [201], [202] and [226]. The *DeepRacing Framework* is an end-to-end simulation environment and virtual testbed for training and evaluating algorithms especially for autonomous racing. In [202] three versions to control the racecar are presented: Pixel to control, pixel to waypoints, pixel to curves. It was shown that a partial end-to-end approach that provides parameterized trajectories based on a DNN outperforms a full end-to-end approach in terms of laptime and failures. [114] shows the combination of MPC and CNNs to create a *perceptual attention-based predictive control algorithm*. With this, the MPC learns how to place attention on relevant areas of a visual input, which allows the vehicle to detect unsafe conditions faster. Drews et al. [50] are providing a framework that combines DNN based road detection as well as MPC to drive aggressively using only the sensor data from a monocular camera, IMU, and wheel speed sensors on the AutoRally vehicle. By combining CNNs and a Long Short Term Memory (LSTM) network the car is able to learn a local cost map representation of the track based on the camera input. This enables a global position estimation with a particle filter against a schematic map at high speeds. The local trajectory planning is afterwards done with the MPC. The authors of [126] provide an evaluation about the image sizes for a full end-to-end approach on a 1:10 scale vehicle. Based on their

TABLE IV
OVERVIEW AND CATEGORIZATION OF ADDITIONAL SOFTWARE IN THE FIELD OF END-TO-END APPROACHES FOR AUTONOMOUS RACING

Name and Reference	Year	End-to-End Category	Topic	Method	Tested on Hardware	Racing Series
Perez et al. [148]	2008	Optimization	Optimal Control Policy	Evolutionary Algorithm	No	-
Salem et al. [161]–[163]	2017, 2018	Optimization	Optimal Control Policy	Fuzzy Logic	No	-
Korkmaz et al. [107]	2018	Optimization	Optimal Control Policy	Fuzzy Logic	No	-
Oliveira et al. [140]	2018	Optimization	Vision based Planning	Bayesian Optimization	No	-
Lee et al. [114]	2019	Deep Learning	Vision based Planning	MPC + CNN	Yes	AutoRally
Weiss et al. [201], [202]	2020	Deep Learning	Vision based Planning	CNN, RNN	No	-
Tatulea et al. [184]	2020	Deep Learning	trajectory planning	NMPC & DNN	No	F1TENTH
Weiss et al. [226]	2021	Deep Learning	Trajectory Prediction	RNN	No	-
Drews et al. [50]	2019	Deep Learning	Localization	CNN, LSTM, + MPC	Yes	AutoRally
Mahmoud et al. [126]	2020	Deep Learning	Vision based Planning	CNN, LSTM	Yes	Donkey Car
Wadeka et al. [231]	2021	Deep Learning	Vision based Planning	CNN	No	IAC
Perot et al. [149]	2017	Reinforcement Learning	Vision based Planning	Advantage actor-critic	No	-
Jaritz et al. [91]	2018	Reinforcement Learning	Vision based Planning	Advantage actor-critic	No	-
De Bruin et al. [44]	2018	Reinforcement Learning	Vision based Planning	Q-Learning+ State representation Learning	No	-
Remonda et al. [153]	2019	Reinforcement Learning	Vision based Planning	DDPG	No	-
Niu et al. [133]	2020	Reinforcement Learning	Vision based Planning	DDPG	No	-
Gückiran et al. [70]	2019	Reinforcement Learning	Vision based Planning	SAC, Rainbow DQN	No	-
Fuchs et al. [58]	2021	Reinforcement Learning	Vision based Planning	SAC	No	-
Chisari et al. [40]	2021	Reinforcement Learning	Vision based Planning	SAC + policy output regularization	Yes	1:43 car
Lee et al. [115]	2021	Reinforcement Learning	Vision based Planning	Bayesian Decision Making	Yes	AutoRally
Pan et al. [143]	2021	Reinforcement Learning	Vision based Planning	Imitation Learning	Yes	AutoRally
Cai et al. [33]	2021	Reinforcement Learning	Vision based Planning	Imitation Learning	Yes	1:20 car
Schwartz et al. [166]	2021	Reinforcement Learning	Vision based Planning	Model based RL	No	-
Brunnbauer et al. [26]	2021	Reinforcement Learning	Vision based Planning	Model based RL	Yes	F1TENTH
Song et al. [169]	2021	Reinforcement Learning	Vision based Planning + Overtaking	SAC + 3-stage curriculum learning	No	-
Gundu et al. [72]	2019	Reinforcement Learning	Model-free optimal control	Q Learning + Soft-Actor Critic	No	-
Ivanov et al. [89]	2020	Reinforcement Learning	Verification	Variation of Algorithms	Yes	F1TENTH

experiments the authors show that by decreasing the image size as an input for the end-to-end pipeline the car can drive faster and has a higher response time. Another evaluation for the usage of end-to-end algorithms is done by Wadekar et al. [231] in an simulation environment. The authors explored different data collection strategies with the goal of reaching high speeds and stable driving with the racecar. They conclude that even in the racetrack setup a high diversity and high amount of training data is necessary to achieve decent results.

Beside these plain usage of DNNs in the software pipeline, additional research efforts were done in the field of reinforcement learning. The autonomous racecar is seen as an agent that interacts with its environment in a continuous form. At each timestep t the agent fulfills an action a_t that leads to a reward r_t as well as an observations of all environment states s_t . Based on the reward r_t the agent tries to maximize the sum of the rewards over time and therefore can *learn* a specific behavior in this environment. Autonomous racing researchers that develop RL algorithms are using either the F1TENTH Gym [137], the Roborace Simulator [78], the SVL Simulator [73] or TORCS [237]. All these simulation environments have an openAI Gym [240] interface that was created for the setup of RL developments. Both [149] and [91] address the problem of autonomous racing by applying the method of Advantage Actor-Critic (A3C) to a simulation rally racing game. A complete framework for the training of the autonomous agents in a distributed system with different tracks

and road conditions is presented as well as the RL method for achieving the end-to-end driving. They generate reasonable results with a fast and reliable vehicle maneuver, especially on different road conditions, but the approach fails to generalize well. To create a better generalization for different racetracks de Bruin et al. [44] provide a combination of Q-Learning and state representation learning to display that this combination learns policies quicker and generalize better to new racetracks than single RL. Both [153] and [133] use the method of Deep Deterministic Policy Gradient (DDPG) to explore the usage of RL in autonomous racing in the TORCS simulation. In both experimental setups DDPG is specially enhanced for the usage on the racetrack and shows good learning and execution results. The application of Soft Actor Critic (SAC) with enhancement and variations is displayed in [40], [70], [169]. While [70] is only using a simulation, Chisari et al. [40] are applying this approach to 1:43 small-scale vehicles and compare the SAC method to a MPC path planner – the MPC outperforms the RL method. The work from Fuchs and Song et al. [58], [169] is using the racing game *Gran Turismo* as both a training and evaluation environment. While in [58] the framework for training the RL agents is presented Song et al. [169] uses and enhances this approach not only to drive with a single vehicle but also with multiple agents. They show that their RL agent is capable of driving fast, following the raceline and overtaking other agents without crashing. Finally, Schwartz et al. [166] and Brunnbauer et al. [26]

present model-based reinforcement learning approaches which can learn competitive visual control policies through self-play in imagination (World Models idea [242]). Especially in [26] it is shown that model-based RL approaches outperform non-model based methods. In addition, the authors display the sim-to-real transfer by testing the trained agent on a F1TENTH vehicle. The vehicle shows good generalization on unknown tracks but no high performance (e.g. low laptime) because of oscillating steering.

E. Applied Autonomous Racing Studies

In the final subsection all applied autonomous racing studies are displayed that clearly do not belong in the previous sections II-A-II-D. These research papers provide *Evaluations* that run either simulator studies or overall analysis in the field of autonomous racing. In addition, the efforts of *Complete Software Stack* developments are displayed here. In order to achieve the vehicle's driving dynamics limits, there must be in-depth knowledge of the driving dynamics behaviour and thus sufficiently good vehicle dynamic modeling. In the category of *Modelling* the research that shows all vehicle dynamic modelling efforts for later usage in either trajectory planner or control algorithms is displayed. Finally, we present *Simulation* efforts and environments for autonomous racecars. A summary and overview of the research in those categories can be found in Table V.

Evaluations

To gain more knowledge in the field of racing different researchers conducted studies with race drivers or racecars. Kegelmann et al. [103] did a study with real (vintage) racing cars and collected vehicle and position data from their runs on the racetracks. By examining the statistical dispersion of the vehicles race lines, the author displayed a quantification of the the repeatability of professional racecar driver performance. In addition, they concluded that different driving styles (combination of path and velocity) can lead to similar lap times. In [164] the raceline trajectory information (dGPS data) from a test vehicle is collected to derive a path fitting algorithm that is describing a raceline. Based on this setup the race lines can be analyzed in-depth and results for autonomous raceline planning can be derived. A direct comparison between autonomous racecar against a human race driver is both done in [154] and [80]. Remonda et al. [154] conduct this study in a simulator environment and compared the lap times, telemetry data and the performance level of a human race driver against a pure autonomous racing software based on RL. By doing this the researchers were able to analyze which features have the most impact on the drivers performance. Those features were used afterwards to enhance the RL approach. In contrast, Hermansdorfer et al. [80] conduct a real world study by comparing an autonomous racing stack on the Roborace vehicle against a professional Formula 2 driver to find indications where the autonomous car fails to meet the performance level of the human race driver. The main reasons are that the human driver is detecting the vehicle limits (tire limits) more accurate, bringing the vehicle more often beyond the limit (higher slip angle) and is applying both brakes later

and throttle earlier. Finally in [21] an evaluation about a crash of an autonomous racecar is displayed.

Complete Software Stack

Although many researchers are just deploying a single algorithm for testing and evaluation, to fully run an autonomous vehicle a complete software stack consisting of perception, planning and control algorithms is necessary. Therefore, many publications aim towards designing a holistic autonomous software stack that describes the individual software components, the methods, the transfer of messages from one module to the other and a final evaluation on real hardware or simulation. In [6], [39], [42], [59], [96], [130], [188], [217] the efforts of developing an autonomous racing software stack for FSD vehicles are presented. Based on the tasks in the FSD competitions (Section III) these cars need to map the environment, localize themselves, plan the path on the fly and follow the path fast and reliable. The teams provide different concepts to solve those individual tasks and display at the same time the underlying computation hardware of the their autonomous race vehicles. In addition, the teams provide insights in the middleware (e.g. ROS) as well as computations times of their algorithms. In contrast to the FSD efforts the publications [19], [20], [35] show their autonomous racing software stacks for running the Roborace vehicle. In [20] the research is aiming towards a software that can operate in a multi-vehicle scenario and therefore displays a dynamic local trajectory planner as a main component. In addition, to achieve high dynamic trajectory planning maneuvers the team displays a *Performance Assessment Module* that is observing the controller and the tires while adjusting parameters accordingly. Caporale et al. [35] display a holistic planning and control stack that has a real-time NMPC as main backbone to track a pre-planned racing line as well as a mapping and localization approach for high speed driving.

Modelling

The modelling of the vehicle dynamics behavior of the racecar is an essential part in the field of autonomous racing. Either these models are used in the simulation environments or model-based trajectory planning/control design approaches. The current state of the art provides many variations of vehicle dynamics modeling such as single track model, double track model or full vehicle model. The more complicated the vehicle dynamics model, the more parameters are needed. Unfortunately not all of those parameters are available in detail for a vehicle and so different methods for estimating these parameters are proposed - especially for nonlinear vehicle parameters like the tires. In [214] the design of the standard joint-state Unscented Kalman Filter (UKF) is presented to estimated vehicle dynamics parameters of a model car both in simulation and with experimental data. The experimental results show satisfactory estimates of the model parameters. Unfortunately the tuning process of this algorithm is time consuming and can only be implemented offline. Park et al. [145] describe the region of feasible tire forces mathematically with constraints on the limits of actuation. They conclude in their work that with reasonable assumptions, the border of feasible tire forces can be displayed by an ellipse and circle for a wheel with steering and braking actuators. The papers [81], [88], [170],

TABLE V
OVERVIEW AND CATEGORIZATION OF APPLIED RESEARCH AND DEVELOPMENT STUDIES IN THE FIELD OF AUTONOMOUS RACING

Name and Reference	Year	Applied Studies Category	Topic/Methods	Tested on Hardware	Racing Series
Samper et al. [164]	2014	Evaluation	Path Analyzation	Yes	-
Kegelman et al. [103]	2016	Evaluation	Simulator Study	Yes	-
Remonda et al. [154]	2021	Evaluation	Simulator Study	No	-
Betz et al. [21]	2019	Evaluation	Crash Analysis	-	Roborace
Hermansdorfer et al. [80]	2020	Evaluation	Race Driver vs. Car	-	Roborace
Bak et al. [13]	2020	Evaluation	Path Planner Stress Tester	No	F1TENTH
Funke et al. [60]	2019	Complete Software Stack	Framework	Yes	Racecar
Culley et al. [42]	2019	Complete Software Stack	Framework	Yes	FSD
Funk et al. [59]	2017	Complete Software Stack	Framework	Yes	FSD
Tian et al. [187]	2018	Complete Software Stack	Framework	Yes	FSD
Chen et al. [39]	2019	Complete Software Stack	Framework	Yes	FSD
Zadok et al. [217]	2019	Complete Software Stack	Simulation	No	FSD
Kabzan et al. [96]	2020	Complete Software Stack	Framework	Yes	FSD
Nekkah et al. [130]	2020	Complete Software Stack	Framework	Yes	FSD
Tian et al. [188]	2020	Complete Software Stack	Framework	Yes	FSD
Betz et al. [19], [20]	2019	Complete Software Stack	Framework	Yes	Roborace
Caporale et al. [35]	2019	Complete Software Stack	Framework	Yes	Roborace
You et al. [214]	2017	Modelling	UKF	Yes	AutoRally
Williams et al. [209]	2019	Modelling	Deep Learning	Yes	AutoRally
Park et al. [145]	2017	Modelling	Modelling	Yes	-
Spielberg et al. [170]	2019	Modelling	Deep Learning	Yes	-
Ignat et al. [88]	2020	Modelling	Deep Learning	Yes	Roborace
Hermansdorfer et al. [81]	2021	Modelling	Deep Learning	Yes	Roborace
Wymann et al. [237]	2005	Simulation	TORCS Simulator	No	-
Jiang et al. [4]	2021	Simulation	Carla Simulator	No	-
Guodong et al. [73]	2020	Simulation	SVL Simulator	Yes	F1TENTH, IAC
Babu et al. [12]	2020	Simulation	F1TENTH Simulator	Yes	F1TENTH
Stahl et al. [177]	2020	Simulation	Scenario Creation	-	Roborace
Herman et al. [78]	2021	Simulation	Roborace Simulator	Yes	Roborace

[209] are using learning based approaches by applying DNNs to identify the model parameters. All of these works show that DNNs can learn and identify the vehicle parameters more accurately than a purely parametric model. In addition, the researchers showed that the DNNs can generalize better than a purely non-parametric model especially when it comes to capturing the unknown dynamics. This makes the usage of DNNs ideal for real-world applications where collecting data from the full state space for a vehicle is not feasible and when different environment dynamics (e.g. icy road) need to be captured in the model.

Simulation

The final paragraph in this subsection displays all simulation efforts that have been done in the field of autonomous racing. Wymann et al. [237] are the authors of *TORCS - The Open Racing Car Simulator*. This lightweight 3D simulator provides different race tracks, different cars, NPC opponents as well as a sophisticated vehicle physics model. This simulator is used for research in the field of control, trajectory planning, game theory and RL and is therefore providing a solution for autonomous race engineers. Roborace released its own simulation environment that is enhanced with an openAI Gym interface especially for classical control or RL tasks [78] which they called *Learn-to-Race (L2R)*. The simulation environment provides a racetrack, sophisticated vehicle physics simulation as well as a wide variety of sensors. The SVL Simulator [73] is a 3D end-to-end autonomous vehicle simulation platform that provides different maps, vehicles, sensor modelling, weather simulation, APIs to well-known open source software stacks

(e.g. Autoware.Auto, Baidu Apollo) and the possibility of a distributed simulation. The SVL Simulator is offering both a 3D-vehicle model of the F1TENTH and the Indy Autonomous Challenge vehicle with different racetracks (Figure 11).



Fig. 11. F1TENTH vehicle in the SVL simulator [73] on a 1:10 scale version of the Indianapolis Motor Speedway.

For the F1TENTH vehicle different simulation environment exist. Babu et al. [12] present a ROS and Gazebo based autonomous racing simulator that is providing different maps, visualizations and model physics. The advantage here is access to the ROS community that enables the integration of robotics packages. Another F1TENTH simulator is the F1TENTH Gym [138] that provides a lightweight, 2D-simulation with an openAI Gym interface. Based upon the Carla Simulator [239] the authors of [234] present an Autonomous System Operations (AutOps) and continuous integration (CI) and

testing framework to evaluate the software in the context of autonomous racing. Especially for the evaluation of trajectory planning maneuvers in a multi vehicle environment Stahl et al. [177] display an open-source graphical user interface that allows the fast generation of multi vehicle race scenarios. These dedicated scenarios (e.g. overtaking maneuvers) can be used to evaluate the trajectory planner or safety assessment algorithms in an autonomous racing stack.

III. AUTONOMOUS RACING HARDWARE: VEHICLES AND COMPETITIONS

The previous section gave an overview on the efforts in the field of algorithm and software development for autonomous racing vehicles. Almost all of the papers provided an evaluation of their proposed methods in an specific simulation environment. About half of the papers did additional evaluations on real vehicle hardware. This hardware is ranging from (powerful) passenger sports cars, specific research vehicle prototypes, small-scale race vehicles or real racing cars. In the following section we provide an overview of currently available hardware and racing competitions (Table VI) that are available for researchers.

A. Small-Scale Autonomous Racing Vehicles

The first type of autonomous racing vehicles are so called *small-scale* or *reduced-scale* vehicles. These racecars were mainly developed for the purpose of testing the new developed autonomous racing software. Those racecars are normally derived from remote controlled (RC) cars and therefore provide an electrical engine and a battery as a main powertrain unit. Those vehicles are then modified with additional hardware (sensors, ECUs), are constructed and maintained by a team of students and researchers and usually costs a few hundred to a few thousands of dollars. Although these are small-scale vehicles, they reach high speeds and accelerations for their size and therefore can be compared to real racecars.

1:43 vehicles

In the ORCA (Optimal RC Racing) ¹ project researchers from the ETH Zurich developed a test bed consisting of a race track, an infrared camera based tracking system and modified 1:43 cars, in order to apply research in the field of MPC algorithms at high speeds and in real-time. A vision system captures the cars on the track and estimates both positions and velocity of each car. This information is then sent to a specific control platform where the MPC controller calculates the control inputs for the cars. This information is then sent via Bluetooth to the embedded cars where the control input is actuated. The research published with this 1:43 cars is heavily in the field of planning and control. As a result the researchers displayed new developments in the field of MPC [37], [86], [117]–[120], game theory [122] and reinforcement learning [40].

1:10 vehicles

In the next bigger size researchers use modified 1:10 scale RC cars for their autonomous racing research. In the last years different institutions released their documentation for both hardware and setup of these 1:10 vehicles and so currently versions like the *Berkeley Autonomous Racecar*², the *MIT Racecar* [102], the *MuSHR racecar* [171], the *RoSCAR* [74] or the *F1TENTH* [137], [138] vehicle from the University of Pennsylvania exists. The sensor setup on these cars is interchangeable and so it is possible to apply monocular cameras (e.g. Raspberry Pi, OpenCV OAK-1), stereo cameras (e.g. ZED, ZED2, Intel Realsense d435i, OpenCV OAK-D), 2D LiDARs (Hokuyo 10LX, Hokuyo 20LX), IMU, indoor GPS or wheelspeed sensors. As a main computation platform these vehicles use embedded GPU systems like the Nvidia Jetson (Models: TX1, TX2, NX, AGX Xavier, Nano). This gives the possibility to speed up the inference of DNNs. With the F1TENTH vehicle an additional, annual autonomous racing competition was launched where students, researchers and hobbyists can race against each other. The competitions consists of a single vehicle time trial and a head-to-head two vehicle race with knockout phase. In addition to these in-person competitions virtual competitions are organized to test the software of the developers. Similar competitions, where those kind of racecars or variations of it are used, are the *DiYRobocar* events or the Amazon *DeepRacer* [14], [15] competitions. The research published with these 1:10 cars is spread completely over all topics in perception [25], [68], planning [95], [228] and control [27], [29], [89], [90], [141], [159], [184], [233]. In recent years these type of vehicles got more important for optimization pipelines [139], [168], the application of RL techniques [26], [52], [53] and the evaluation of game theory methods [198], [200]. In addition, the 1:10 vehicles are used for education purposes [6], [12], [51], [102] to teach students hands-on fundamentals of autonomous driving.

1:5 vehicles

A special version of an autonomous small-scale vehicle is the so called *AutoRally* [66] vehicle, a 1:5 scale autonomous racecar developed by a team of researchers from Georgia Tech. The AutoRally autonomous vehicle platform is based on a RC trophy truck (length: 1 m, width: 0.6 m, mass: 22 kg) with a top speed of ~ 90 km/h. The AutoRally vehicle uses two monocular cameras (Point Grey Flea3 FL3-U3-13E4C-C color) as a main sensors to perceive the environment, has an IMU for acceleration measurements and hall-effect sensors to measure the wheel speeds. In addition, this vehicle has a GPS receiver (Hemisphere P307) integrated which provides an absolute position at 20 Hz with an accuracy of approximately 2 cm under ideal conditions with Real-Time Kinematic (RTK) corrections that are derived from a GPS base station. The main computation unit consists of standard consumer computer components (Intel i7-6700 -3.4 GHz quad-core, 32 GB DDR4, Nvidia GTX-750ti SC) which are modular and reconfigurable

¹<https://control.ee.ethz.ch/research/team-projects/autonomous-rc-car-racing.html>

²www.barc-project.com/projects

TABLE VI

AUTONOMOUS RACING HARDWARE: OVERVIEW OVER DIFFERENT AVAILABLE HARDWARE AND RACING COMPETITIONS AVAILABLE FOR RESEARCHERS

	F1TENTH³	EV Grand Prix Autonomous⁴	Formula Student Driverless⁵	Indy Autonomous Challenge⁶	Roborace⁷
Vehicle Image					
Vehicle Type	Small Scale 1:10	Reduced Scale 1:3	Reduced Scale 1:1.5	Real Racecar Indy Light Chassis	Real Racecar LMP Chassis
Vehicle Parameters	Length: 0.53 m Width: 0.28 m Mass: 3.5 kg	Length: 1.5 m Width: 1.4 m Mass: 110 kg	Vehicle parameters are based on the teams design choices	Length: 4.9 m Width: 1.9 m Mass: 750 kg	Length: 4.7 m Width: 2.0 m Mass: 1200 kg
Powertrain	Electrical Engine AWD Engine: 230 W Battery: 55 Wh	Electrical Engine RWD Engine: Teams choice Battery: Teams choice	Electrical Engine AWD/RWD Engine: Teams choice Battery: Teams choice	Combustion Engine RWD Engine: 335 kW 6 speed sequential	Electrical Engine RWD Engine: 270 kW Battery: 40 kWh
Maximum Speed	~72 km/h	~ 100 km/h Depends on components choices	~ 120 km/h Depends on components choices	~290 km/h	~250 km/h
Sensor Setup	Monocular camera Stereocamera 2D LiDAR Indoor GPS	Sensor setup based on team choice: Monocular camera Stereocamera Radar 2D LiDAR 3D LiDAR (RTK) GPS	Sensor setup based on team choice: Monocular camera Stereocamera Radar 2D LiDAR 3D LiDAR (RTK) GPS	6x Monocular camera 4x Radar 3x 3D LiDAR (RTK) GPS	4x Monocular camera 2x Long Range Radar 2x Short Range Radar 5x 3D LiDAR (RTK) GPS
Computation Unit	Nvidia Jetson Nano Nvidia Jetson NX Nvidia Jetson AGX	Teams choice	Teams choice	Intel Xeon E 2278 GE – 3.30 GHz, 1x Nvidia Quadro RTX 8000, 64GB Ram	Nvidia Drive PX2 Speedgoat Mobile McLaren ECU
Software	ROS ROS2 Autoware.Auto	Teams choice	Teams choice	ROS2 Autoware.Auto	Teams choice
Competitons	Several competitions a year, competitions in different countries	One Race, USA only	Several competitions a year, competitions in different countries	Two Races, USA only	One championship with several races, USA & UK
Single/Multi Vehicle Race	Multi Vehicle 2 Cars	Single Vehicle	Single Vehicle	Single Vehicle Multi Vehicle (2 Cars)	Single Vehicle Multi Vehicle (2 Cars)
Real Race Competition Type	Time Trial Head to Head Racing	Time Trials	Acceleration Skidpad Autocross Trackdrive Efficiency Business, Cost, Design	Time Trial Overtaking Competition	Time Trial (with virtual objects)
Virtual Race	Yes	No	No	Yes	No
Simulation Environments	F1TENTH Gym F1TENTH Simulator SVL Simulator	-	Formula Student Driverless Simulator	Ansys Simulator SVL Simulator	Roborace Simulator
Related Papers	[6], [12], [25], [26], [29], [52], [53], [68], [89], [90], [95], [137]–[139], [168], [184], [200], [228]	-	[10], [39], [45]–[47], [55], [59], [67], [93], [96], [97], [116], [123], [130]–[132], [151], [173], [179], [187]–[189], [191], [193], [217], [218]	[223], [227], [231]	[3], [19]–[21], [31], [34], [35], [38], [41], [76], [78]–[84], [88], [127], [134], [142], [155], [174]–[178], [210]–[213], [220]–[222], [225]

and are all connected on a Mini-ITX motherboard.

This brings the AutoRally setup closer to real passenger vehicles and allows a high computation power. The research published with the AutoRally car is in the field of planning [11], [115], [204], [215], [216] and control [50], [62], [114], [197], [203], [205]–[209], state estimation [56], [214] and the application of deep neural networks for perception and

planning [50], [143] with an overall special focus on low friction surfaces.

eV Grand Prix Autonomous

In 2021 a new racing competition called *eV Grand Prix Autonomous* started in the USA. Student teams need to acquire a standardized electric go-kart chassis and are then allowed to modify the vehicle. The teams can change the complete electric drivetrain and integrate new components, e.g. battery,

³www.f1tenth.org

⁴www.evgrandprix.org/autonomous/

⁵www.fsaonline.com

⁶www.indyautonomouschallenge.com

⁷www.robomax.com

electrical engine, inverter. In addition, the teams can choose their own sensor setup (camera, radar, LiDAR, (RTK) GPS, IMU) to create an autonomous vehicle. Furthermore, the teams develop the software that drives the autonomous go-kart around the racetrack. The current race setup consists of single vehicle time trial laps. Because the eV Grand Prix autonomous is still in its early stage there was no research published with these kind of vehicles so far.

Formula Student Driverless

Since 2017 student teams can develop a driverless vehicle for the Formula Student Driverless competition. The students can choose on their own how to design and equip the vehicle with both powertrain or autonomous driving hardware. Therefore different setups with different computation platforms (e.g. consumer hardware, Nvidia Drive PX hardware, Nvidia Jetson hardware) and sensors setups (monocular cameras, 3D LiDAR) exist. The cars compete in different single vehicle competitions: Acceleration (driving 75m straight with standing start), skid pad (two congruent circles with a diameter of 18.25m), autocross (racing on closed loop track with unknown layout), track drive and efficiency (racing 10 laps on a track with additional efficiency scoring based on the consumed energy). In addition to these pure driving competitions the cars are then judged in an additional business plan (business idea of the vehicle), design (judgement of hardware and software) and cost (financial planning and manufacturing) competition.

The research published with the Formula Student cars is spread completely over all topics in object detection [45]–[47], [151], [179], localization [10], [67], [116], [172], planning [55], [173], [193] and control [57], [93], [96], [123], [131], [132] with a focus on holistic software pipelines [39], [48], [59], [97], [130], [187], [188], [191], [217], [218] with adjustments for the specialities of the FSD competition.

B. Real Autonomous Race Vehicles

The small-scale vehicles offer a low-cost and easy to set up platform for researchers. In addition, only a small space is needed to run the vehicles and therefore these kind of small scale vehicles are very attractive for research in the field of autonomous racing. Unfortunately because of the scaling there is still a mismatch between those vehicles and real racecars. This has not only to do with the performance (v_{max} , $a_{long,max}$, $a_{lat,max}$) but also with the kind of sensors or computation units these vehicles equipped with. Furthermore, a real racecar has a different dynamic behavior because of the stiffness of the chassis. Based on this some companies/institutions decided to develop real autonomous race vehicles which are explored in further detail. There was an additional development of an autonomous dragster [17], [18], the application of which, apart from in these papers, has not taken place elsewhere and is therefore not to be considered in the further discussion.

Roborace

Roborace is a UK based company that developed different autonomous racecars (Devbot 1.0, Devbot 2.0, Robocar). The Robocar was only used for internal Roborace events and both Devbot 1.0 and 2.0 were provided to interested university teams and companies for their research. The Devbot 2.0 is

based on a Le Mans Prototype (LMP) chassis and is a rear wheel drive, fully electric racecar. The vehicle is equipped with camera, LiDAR and radar sensors and two main ECUs (Nvidia PX2, Speedgoat Mobile Target Machine) to run the autonomous software. The goal of this vehicle development efforts is to provide both a vehicle platform and an annual competition where teams can compete against each other. The teams only need to develop the software, the hardware setup is equal for all teams. In 2018 single vehicle time trials were executed, in 2019 the so called *Season Alpha* provided different race formats (single vehicle, multi vehicle, localization) on racetracks in Europe. In 2020/2021 Roborace *Season Beta* started with seven university teams competing against each other in single-vehicle races (time trials). A special software from Roborace called *Metaverse* provides virtual static and dynamic objects on the track that needed to be avoided by the teams - otherwise they get time penalties for hitting these objects. The university teams used the Roborace vehicles for their research and provided plenty of published papers in the field of localization and motion estimation [127], [155], [174], [210], [220], [225], mapping [134], [142], planning [34], [41], [76], [79], [83], [84], [174], [176], [178] and control [31], [38], [211]–[213], [222] as well as energy management [82], [83] and holistic software stack development [3], [19]–[21]. In addition, the Roborace vehicle was used to derive some new simulation [75], [77], [78] and scenario environments [177], vehicle dynamics modelling [81], [88] and autonomous racing benchmarks [80].

Indy Autonomous Challenge

In 2020 the *Indy Autonomous Challenge* (IAC) was launched as a successor of the DARPA Grand Challenge and DARPA Urban Challenge. The IAC racecar is based on an Indy Lights chassis and is a rear wheel drive racecar powered by a combustion engine with 6 gear sequential transmission. The IAC vehicle is equipped with camera, LiDAR and radar sensors for perception and has one main ECU to run the autonomous software. The IAC provides universities both the vehicle platform and several competition types. The teams only need to develop the software, the hardware setup is equal for all teams. As a main middleware ROS2 is used. The IAC challenge consists of a single vehicle race around the Indianapolis Motor Speedway in October 2021 and a two vehicle head-to-head race on the Las Vegas Motor Speedway in January 2022. The aim is to drive 290 km/h with those vehicles and therefore the teams need to develop a high performance autonomous software stack that executes perception, planning and control. Since the IAC competition just finished its competition only a few papers [223], [227], [231] have been published so far.

IV. OPEN RESEARCH QUESTIONS AND CHALLENGES

In the previous sections we provided a detailed overview of all the efforts that have been made in the field of autonomous racing for both software and hardware. The goal of all this research efforts is to contribute to the development of safer autonomous passenger vehicles and the possibility to derive knowledge for the development of new and advanced autonomous driving algorithms. Although the state of the art is quite extensive, there are still some open and unsolved research

questions where the field of autonomous racing can support, help and leverage the development of future autonomous driving algorithms. Based on additional discussions with leading researchers in the field we present a list of challenges in the field that determine open research questions:

Challenge 1 - Autonomous high speed perception: None of the previous work is covering high speed object detection or providing a detailed insight in different fusion techniques for high speed localization. The current state of the art presents standard SLAM or object detection methods that are then adapted to the field of autonomous racing. We are currently missing methods, techniques and algorithms that are especially made for high speed driving where increased motion blur occurs and sensor synchronization becomes more important. A reliable detection distance above 100 m is required. This can be achieved by decreasing the computational delay, an enhancement in the sensor fusion performance (camera+Radar+LiDAR) and with an increase of the object detection quality. When it comes to vision-based localization we see successful research in the field of drone racing which can be adapted and applied to the field of autonomous racing. Besides that there is currently no public dataset for high speed driving. However, the availability of rich data is essential for the development of comprehensive perception algorithms for this speed range.

Challenge 2 - Multi vehicle trajectory planning: Most of the displayed papers are dealing with a single vehicle setup and only a handful of researchers tried to address multi vehicle scenarios (>3 vehicles). Dynamic local trajectory planning at high speeds with multiple vehicles (e.g. for overtaking) is difficult and not covered completely in the state of the art and displays therefore a grand challenge for future research. The trajectory planning method must be capable of finding a path in a non-convex environment that is collision free, recursive feasible, incorporating dynamic vehicle constraints and is executable in real-time. Both the path and the velocity must be planned while taking the vehicle dynamics into account to leverage the current tire performance of the vehicle. We see this either as a chance for creating new types of methods and algorithms for trajectory planning or as a test environment for new heuristics that decrease the computational heavy calculations.

Challenge 3 - Multi vehicle interaction: The interaction with other vehicles is an essential part of racing especially when it comes to head-to-head racing (e.g. overtaking, blocking). This interaction is covered with game theory approaches in some of the work but is not explored extensively. This interaction provides the need for new prediction algorithms that can deal with the high uncertainty of the opponents movements/behavior in the less structured environment of the racetrack. Hence the prediction of surrounding objects can not rely on lane information or traffic rules, but has to be based on a comprehensive understanding of interactive scenarios. Besides that a fundamental aspect of future state prediction is that it is inherently stochastic, as agents cannot know each other's motivations, so multiple modalities have to be considered. We seek a model of the future that can provide both (1) a weighted, thrifty set of discrete trajectories that

covers the space of likely outcomes and (2) a closed-form evaluation of the likelihood of any trajectory. In addition, there are no sophisticated behavior planners that can derive critical interaction based maneuvers for competing in a race environment. The goal is to enable a tight coupling between reason about the influence of the surrounding agents on the ego systems trajectory and maintaining full capabilities of the ego systems vehicle dynamics.

Challenge 4 - Adversarial driving: The racetrack enables the testing of the capabilities of an adversarial vehicle that is exploring and evaluating the risk of future actions by planning and performing high risk maneuvers. This kind of research enables knowledge for autonomous cars that need to operate in highly crowded multi vehicle and multi passenger scenarios while minimizing the possibility of a freezing robot problem. This research heavily includes the calculation of risk for a perceived environment, a risk evaluation as well as new high precision local behavioral and trajectory planning algorithms.

Challenge 5 - Real-time vehicle dynamics modelling: Autonomous vehicles that operate on the limits of handling need to have an exact knowledge about the current vehicle dynamics state. One crucial factor hereby is the tire which is creating the road-vehicle contact (friction value) which is changing drastically with aerodynamics (downforce), road conditions (tarmac), weather conditions (rain, snow) and the current vehicle maneuver (load shift due to braking, acceleration). The existing high model uncertainty due to external influences combined with strongly non-linear effects in tire and vehicle dynamics represents a challenge for both motion planning and control (e.g. MPC) algorithms. Available models approximate the vehicle dynamics to a certain degree but are computationally demanding, especially when it comes to tire models. Current research efforts try to calculate the dynamical behavior of the vehicle with the help of artificial neural networks to be computationally faster than classical physical models.

Challenge 6 - Balancing safety and performance: The current work is heavily exploring the limits of an autonomous vehicle from a software and hardware perspective with the goal to drive fast. When it comes to a racing scenario we have to make a trade off between safety (not crashing the car), high performance (staying close to the opponent), energy management and making decisions while not violating the handling limits (stay behind opponent, overtake in particular turn). This setup creates the need for software that explores the trade-off between safety and performance. This software is then coupled with motion and behavioral planners and decides which actions to take next. In addition, the current state of the art does not cover the safety aspects of the autonomous racecar in particular and therefore we have an open research area where algorithms need to be derived that evaluate and balance both safety and performance of the vehicle.

Challenge 7 - Autonomous racing regulations and rulebook: Although the community currently consists of many different racing series with different cars we have no agreement on the driving rules for autonomous racecars. Although this can be declared as less research and more a community effort, when it comes to autonomous driving a rulebook based definition for racecars could be helpful. This leads to general

guidelines researchers can rely on when developing their algorithms. Ultimately, this leads to software that is compliant for specific racecar competitions.

Challenge 8 – Overall software application: Besides the development of particular algorithms for autonomous racing in each part of the software stack, the in-depth analysis of the overall software performance is a research field that is rarely covered. The synchronization of modules and the application of real-time conditions can reduce the overall latency significantly. Additionally, the delay of sensors and actuators influence both reaction time and vehicle performance. Unfortunately, these need to be considered in the development of a full software stack for autonomous racing. The optimal scheduling of software execution steps and an efficient management of the CPU and GPU usage by orchestration and hypervisor methods are additional research fields for the software development.

Challenge 9 - Autonomous high speed hardware: All platforms discussed in this survey are relying on standard consumer hardware (e.g. ECUs, sensors). There is currently no hardware existing that is aiming towards high speed driving or that was made particularly for autonomous racecars regarding computational demand as well as for vibration and shock resistance. Especially when we have a closer look to execution times displayed in the listed papers we see that some of the algorithms can be executed faster if particular hardware would exist.

V. SUMMARY AND CONCLUSIONS

This survey paper presents a comprehensive overview of the current state of the art in the field of autonomous vehicle racing. By discussing the previous and ongoing research efforts in this field we were able to demonstrate what kind of algorithms were developed to derive autonomous high speed driving on the racetrack. By splitting this paper into different sections for perception, planning and control we showed the individual achievements derived by researchers to establish the autonomous driving task for a racecar. Furthermore, we displayed and categorized research in the field of end-to-end algorithms, vehicle dynamics modelling and simulation environments. This survey aims towards a holistic review in the field of autonomous racing so additionally all hardware developments and autonomous racing platforms that are available are explained in detail. Some of these vehicles are connected to regularly competitions that provide an additional platform for researchers to test and evaluate the performance of their software. In total this survey is covering 233 papers in the field of autonomous vehicle racing. Furthermore, in the last four years we saw an increase of papers in this field (Figure 12).

Undoubtedly, the field of autonomous racing is an emerging field in intelligent vehicles, robotics and transportation system that is attracting more and more interest from researchers. Although we see an overweight of research in the field of planning & control, emerging fields like reinforcement learning are easily applicable to autonomous racing. Based on these results we derived a list of open research challenges for autonomous racing. This list can be used as a guideline for future researchers which can participate in the displayed

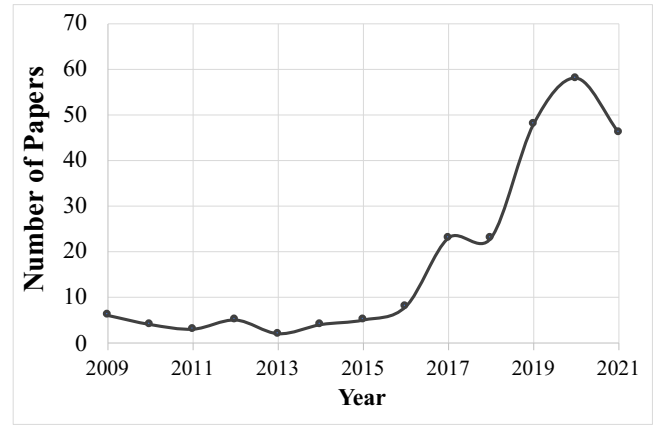


Fig. 12. Evaluation: Published paper in the field autonomous racing from 2009 until the end of 2021.

autonomous racing competitions. Finally, the list of papers surveyed in this paper are uploaded to a Github repository and updated on a regular basis so other researchers have an easy, open-source and structured access to the papers in the field of autonomous racing.

CONTRIBUTIONS AND ACKNOWLEDGEMENT

Johannes Betz initiated the idea of this paper, created the overall structure and contributed to all sections of this survey paper. Hongrui Zheng contributed to the path planning section. Alex Liniger and Ugo Rosolia contributed to the path planning and control section. Phillip Karle contributed to the path planning section and open research challenges. Madhur Behl and Venkat Krovi revised the paper critically. Rahul Mangharam contributed to the overall structure of the paper, the open research challenges and revised the paper critically.

We would like to thank Todd Murphy (Northwestern University), Davide Scaramuzza (University of Zurich), Chris Gerdes (Stanford University), Markus Lienkamp (Technical University of Munich), Panagiotis Tsiotras (Georgia Institute of Technology) and Sertac Karaman (Massachusetts Institute of Technology) for their talks at 2021 IEEE ICRA 1st workshop "Opportunities and Challenges with Autonomous Racing"⁸ which contributed to the creation of Section IV in this survey paper.

⁸<https://linklab-ua.github.io/icra-autonomous-racing>

APPENDIX

TABLE VII
LIST OF ABBREVIATIONS

Abbreviation	Definition
A3C	Advantage Actor-Critic
AMCL	Adaptive Monte Carlo Localization
AWD	All Wheel Drive
BVSC	Backstepping Variable Structure Control
BO	Bayesian Optimization
CI	Continuous Integration
CMA	Covariance Matrix Adaption
CMA-ES	Covariance Matrix Adaption Evolutionary Strategy
CNN	Convolutional Neural Network
CPU	Central processing unit
COP	Center of Percussion
DDPG	Deep Deterministic Policy Gradient
DMD-MPC	Dynamic Mirror Descent MPC
DNN	Deep Neural Network
DP	Dynamic Programming
EA	Evolutionary Algorithm
ECU	Electrical Control Unit
EHF	H ∞ Filter
EKF	Extended Kalman Filter
ES	Evolutionary Strategy
FSD	Formula Student Driverless
G-G	Maximal Lateral and Longitudinal Accelerations
GA	Genetic Algorithm
GP	Gaussian Process
GPS	Global Positioning System
GPU	Graphical Processing Unit
HD	High Definition
IAC	Indy Autonomous Challenge
ILC	Iterativ Learning Control
IMU	Inertial Measurement Unit
KF	Kalman Filter
L2R	Learn-to-Race
LMP	Le Mans Prototype
LMPC	Learning Model Predictive Control
LSTM	Long Short Term Memory
LPV	Linear Parameter-Varying
MIQP	Mixed Integer Quadratic Programming
MPC	Model Predictive Control
MPPI	Model Predictive Path Integral Control
NDT	Normal Distribution Transform
NMPC	Nonlinear Model Predictive Control
NPC	Non Playable Character
OCF	Optimal Control Problem
PID	Proportional Integral Derivative Controller
POMDP	Partially Observable Markov Decision Process
QCQP	Convex Quadratically Constrained Quadratic Problem
RC	Remote Controlled
ROS	Robot Operating System
RL	Reinforcement Learning
RRT	Rapidly-exploring random tree
RTK	Real-Time Kinematic
RNN	Recurrent Neural Network
RWD	Rear Wheel Drive
SAC	Soft Actor Critic
SQP	Sequential Quadratic Programming
SRMPC	sparse Randomized MPC
SSD	Single Shot Detection
UKF	Unscented Kalman Filter
TMPC	Tube MPC
SLAM	Simultaneous Localization and Mapping
YOLO	You Only Look Once (DNN)

REFERENCES

- [1] F. Doubek, F. Salzmann, and J. de Winter, "What makes a good driver on public roads and race tracks? an interview study," *Transportation Research Part F: Traffic Psychology and Behaviour*, vol. 80, pp. 399–423, Jul. 2021. [Online]. Available: <https://doi.org/10.1016/j.trf.2021.04.019>
- [2] I. R. Lima, S. Haar, L. D. Grassi, and A. A. Faisal, "Neurobehavioural signatures in race car driving: a case study," *Scientific Reports*, vol. 10, no. 1, Jul. 2020. [Online]. Available: <https://doi.org/10.1038/s41598-020-68423-2>
- [3] J. Betz, A. Wischniewski, A. Heilmeier, F. Nobis, T. Stahl, L. Hermansdorfer, B. Lohmann, and M. Lienkamp, "What can we learn from autonomous level-5 motorsport?" in *Proceedings*. Springer Fachmedien Wiesbaden, Sep. 2018, pp. 123–146. [Online]. Available: https://doi.org/10.1007/978-3-658-22050-1_12
- [4] A. Jiang, "Research on the development of autonomous race cars and impact on self-driving cars," *Journal of Physics: Conference Series*, vol. 1824, no. 1, p. 012009, Mar. 2021. [Online]. Available: <https://doi.org/10.1088/1742-6596/1824/1/012009>
- [5] D. A. Bristow, M. Tharayil, and A. G. Alleyne, "A survey of iterative learning control," *IEEE control systems magazine*, vol. 26, no. 3, pp. 96–114, 2006.
- [6] A. Agnihotri, M. O'Kelly, R. Mangharam, and H. Abbas, "Teaching autonomous systems at 1/10th-scale," in *Proceedings of the 51st ACM Technical Symposium on Computer Science Education*. ACM, Feb. 2020. [Online]. Available: <https://doi.org/10.1145/3328778.3366796>
- [7] E. Alcalá, V. Puig, J. Quevedo, and U. Rosolia, "Autonomous racing using linear parameter varying-model predictive control (LPV-MPC)," *Control Engineering Practice*, vol. 95, p. 104270, Feb. 2020. [Online]. Available: <https://doi.org/10.1016/j.conengprac.2019.104270>
- [8] E. Alcalá, V. Puig, and J. Quevedo, "LPV-MP planning for autonomous racing vehicles considering obstacles," *Robotics and Autonomous Systems*, vol. 124, p. 103392, Feb. 2020. [Online]. Available: <https://doi.org/10.1016/j.robot.2019.103392>
- [9] J. R. Anderson, B. Ayalew, and T. Weiskircher, "Modeling a professional driver in ultra-high performance maneuvers with a hybrid cost MPC," in *2016 American Control Conference (ACC)*. IEEE, Jul. 2016. [Online]. Available: <https://doi.org/10.1109/acc.2016.7525209>
- [10] L. Andresen, A. Brandemuehl, A. Honger, B. Kuan, N. Vodisch, H. Blum, V. Reijgwart, L. Bernreiter, L. Schaupp, J. J. Chung, M. Burki, M. R. Oswald, R. Siegwart, and A. Gawel, "Accurate mapping and planning for autonomous racing," in *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, Oct. 2020. [Online]. Available: <https://doi.org/10.1109/iros45743.2020.9341702>
- [11] O. Arslan, K. Berntorp, and P. Tsiotras, "Sampling-based algorithms for optimal motion planning using closed-loop prediction," in *2017 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2017. [Online]. Available: <https://doi.org/10.1109/icra.2017.7989581>
- [12] V. S. Babu and M. Behl, "f1tenth.dev - an open-source ROS based f1/10 autonomous racing simulator," in *2020 IEEE 16th International Conference on Automation Science and Engineering (CASE)*. IEEE, Aug. 2020. [Online]. Available: <https://doi.org/10.1109/case48305.2020.9216949>
- [13] S. Bak, J. Betz, A. Chawla, H. Zheng, and R. Mangharam, "Stress testing autonomous racing overtake maneuvers with rrt," 2021.
- [14] B. Balaji, S. Mallya, S. Genc, S. Gupta, L. Dirac, V. Khare, G. Roy, T. Sun, Y. Tao, B. Townsend, E. Calleja, S. Muralidhara, and D. Karup-pasamy, "DeepRacer: Educational autonomous racing platform for experimentation with sim2real reinforcement learning," 2019.
- [15] —, "DeepRacer: Autonomous racing platform for experimentation with sim2real reinforcement learning," in *2020 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2020. [Online]. Available: <https://doi.org/10.1109/icra40945.2020.9197465>
- [16] C. E. Beal and J. C. Gerdes, "Model predictive control for vehicle stabilization at the limits of handling," *IEEE Transactions on Control Systems Technology*, vol. 21, no. 4, pp. 1258–1269, Jul. 2013. [Online]. Available: <https://doi.org/10.1109/tcst.2012.2200826>
- [17] J. Bell, V. Donikian, and G. Washington, "Modeling and design of an autonomous dragster," in *SAE Technical Paper Series*. SAE International, Apr. 2020. [Online]. Available: <https://doi.org/10.4271/2020-01-0711>
- [18] J. Bell, "Modeling and design of an autonomous high speed 1/4 mile vehicle," in *PhD Thesis*, 2020.

- [19] J. Betz, A. Wischnewski, A. Heilmeier, F. Nobis, T. Stahl, L. Hermansdorfer, and M. Lienkamp, "A software architecture for an autonomous racecar," in *2019 IEEE 89th Vehicular Technology Conference (VTC2019-Spring)*. IEEE, Apr. 2019. [Online]. Available: <https://doi.org/10.1109/vtcspring.2019.8746367>
- [20] J. Betz, A. Wischnewski, A. Heilmeier, F. Nobis, L. Hermansdorfer, T. Stahl, T. Herrmann, and M. Lienkamp, "A software architecture for the dynamic path planning of an autonomous racecar at the limits of handling," in *2019 IEEE International Conference on Connected Vehicles and Expo (ICCVE)*. IEEE, Nov. 2019. [Online]. Available: <https://doi.org/10.1109/iccve45908.2019.8965238>
- [21] J. Betz, A. Heilmeier, A. Wischnewski, T. Stahl, and M. Lienkamp, "Autonomous driving—a crash explained in detail," *Applied Sciences*, vol. 9, no. 23, p. 5126, Nov. 2019. [Online]. Available: <https://doi.org/10.3390/app9235126>
- [22] M. Bevilacqua, A. Tsourdos, and A. Starr, "Particle swarm for path planning in a racing circuit simulation," in *2017 IEEE International Instrumentation and Measurement Technology Conference (I2MTC)*. IEEE, May 2017. [Online]. Available: <https://doi.org/10.1109/i2mtc.2017.7969735>
- [23] F. Braghin, F. Cheli, S. Melzi, and E. Sabbioni, "Race driver model," *Computers & Structures*, vol. 86, no. 13-14, pp. 1503–1516, Jul. 2008. [Online]. Available: <https://doi.org/10.1016/j.compstruc.2007.04.028>
- [24] M. Brown and J. C. Gerdes, "Coordinating tire forces to avoid obstacles using nonlinear model predictive control," *IEEE Transactions on Intelligent Vehicles*, vol. 5, no. 1, pp. 21–31, Mar. 2020. [Online]. Available: <https://doi.org/10.1109/tiv.2019.2955362>
- [25] A. Brunnbauer and M. Bader, "Traffic cone based self-localization on a 1:10 race car," 2019. [Online]. Available: <https://openlib.tugraz.at/download.php?id=5d09dba1efec&location=medra>
- [26] A. Brunnbauer, L. Berducci, A. Brandstätter, M. Lechner, R. Hasani, D. Rus, and R. Grosu, "Model-based versus model-free deep reinforcement learning for autonomous racing cars," 2021.
- [27] M. Brunner, U. Rosolia, J. Gonzales, and F. Borrelli, "Repetitive learning model predictive control: An autonomous racing example," in *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*. IEEE, Dec. 2017. [Online]. Available: <https://doi.org/10.1109/cdc.2017.8264027>
- [28] M. Bujarbaruah, X. Zhang, U. Rosolia, and F. Borrelli, "Adaptive MPC for iterative tasks," in *2018 IEEE Conference on Decision and Control (CDC)*. IEEE, Dec. 2018. [Online]. Available: <https://doi.org/10.1109/cdc.2018.8618694>
- [29] A. Bulsara, A. Raman, S. Kamarajugadda, M. Schmid, and V. N. Krovi, "Obstacle avoidance using model predictive control: An implementation and validation study using scaled vehicles," in *SAE Technical Paper Series*. SAE International, Apr. 2020. [Online]. Available: <https://doi.org/10.4271/2020-01-0109>
- [30] M. V. Butz and T. D. Lonkeker, "Optimized sensory-motor couplings plus strategy extensions for the TORCS car racing challenge," in *2009 IEEE Symposium on Computational Intelligence and Games*. IEEE, Sep. 2009. [Online]. Available: <https://doi.org/10.1109/cig.2009.5286458>
- [31] A. Buyval, A. Gabduln, R. Mustafin, and I. Shimchik, "Deriving overtaking strategy from nonlinear model predictive control for a race car," in *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, Sep. 2017. [Online]. Available: <https://doi.org/10.1109/iros.2017.8206086>
- [32] P. Cai, X. Mei, L. Tai, Y. Sun, and M. Liu, "High-speed autonomous drifting with deep reinforcement learning," *IEEE Robotics and Automation Letters*, vol. 5, no. 2, pp. 1247–1254, Apr. 2020. [Online]. Available: <https://doi.org/10.1109/lra.2020.2967299>
- [33] P. Cai, H. Wang, H. Huang, Y. Liu, and M. Liu, "Vision-based autonomous car racing using deep imitative reinforcement learning," *IEEE Robotics and Automation Letters*, pp. 1–1, 2021.
- [34] D. Caporale, L. Venturini, A. Fagiolini, L. Pallottino, A. Settini, A. Biondo, F. Amerotti, F. Massa, S. D. Caro, and A. Corti, "A planning and control system for self-driving racing vehicles," in *2018 IEEE 4th International Forum on Research and Technology for Society and Industry (RTSI)*. IEEE, Sep. 2018. [Online]. Available: <https://doi.org/10.1109/rtsi.2018.8548444>
- [35] D. Caporale, A. Settini, F. Massa, F. Amerotti, A. Corti, A. Fagiolini, M. Guiggiani, A. Bicchì, and L. Pallottino, "Towards the design of robotic drivers for full-scale self-driving racing cars," in *2019 International Conference on Robotics and Automation (ICRA)*. IEEE, May 2019. [Online]. Available: <https://doi.org/10.1109/icra.2019.8793882>
- [36] L. Cardamone, D. Loiacono, P. L. Lanzi, and A. P. Bardelli, "Searching for the optimal racing line using genetic algorithms," in *Proceedings of the 2010 IEEE Conference on Computational Intelligence and Games*. IEEE, Aug. 2010. [Online]. Available: <https://doi.org/10.1109/itw.2010.5593330>
- [37] J. V. Carrau, A. Liniger, X. Zhang, and J. Lygeros, "Efficient implementation of randomized MPC for miniature race cars," in *2016 European Control Conference (ECC)*. IEEE, Jun. 2016. [Online]. Available: <https://doi.org/10.1109/ecc.2016.7810413>
- [38] C. Chatzikomis, A. Sorniotti, P. Gruber, M. Zanchetta, D. Willans, and B. Balcombe, "Comparison of path tracking and torque-vectoring controllers for autonomous electric vehicles," *IEEE Transactions on Intelligent Vehicles*, vol. 3, no. 4, pp. 559–570, Dec. 2018. [Online]. Available: <https://doi.org/10.1109/tiv.2018.2874529>
- [39] T. Chen, Z. Li, Y. He, Z. Xu, Z. Yan, and H. Li, "From perception to control: an autonomous driving system for a formula student driverless car," 2019.
- [40] E. Chisari, A. Liniger, A. Rupenyan, L. V. Gool, and J. Lygeros, "Learning from simulation, racing in reality," 2021. [Online]. Available: [arXiv:2011.13332](https://arxiv.org/abs/2011.13332)
- [41] F. Christ, A. Wischnewski, A. Heilmeier, and B. Lohmann, "Time-optimal trajectory planning for a race car considering variable tyre-road friction coefficients," *Vehicle System Dynamics*, vol. 59, no. 4, pp. 588–612, Dec. 2019. [Online]. Available: <https://doi.org/10.1080/00423114.2019.1704804>
- [42] J. Culley, S. Garlick, E. G. Esteller, P. Georgiev, I. Fursa, I. V. Sluis, P. Ball, and A. Bradley, "System design for a driverless autonomous racing vehicle," in *2020 12th International Symposium on Communication Systems, Networks and Digital Signal Processing (CSNDSP)*. IEEE, Jul. 2020. [Online]. Available: <https://doi.org/10.1109/csndsp49049.2020.9249626>
- [43] N. D. Bianco, E. Bertolazzi, F. Biral, and M. Massaro, "Comparison of direct and indirect methods for minimum lap time optimal control problems," *Vehicle System Dynamics*, vol. 57, no. 5, pp. 665–696, Jun. 2018. [Online]. Available: <https://doi.org/10.1080/00423114.2018.1480048>
- [44] T. de Bruin, J. Kober, K. Tuyls, and R. Babuska, "Integrating state representation learning into deep reinforcement learning," *IEEE Robotics and Automation Letters*, vol. 3, no. 3, pp. 1394–1401, Jul. 2018. [Online]. Available: <https://doi.org/10.1109/lra.2018.2800101>
- [45] N. D. Rita, A. Aimar, and T. Delbruck, "CNN-based object detection on low precision hardware: Racing car case study," in *2019 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, Jun. 2019. [Online]. Available: <https://doi.org/10.1109/ivs.2019.8814001>
- [46] A. Dhall, D. Dai, and L. V. Gool, "Real-time 3d traffic cone detection for autonomous driving," in *2019 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, Jun. 2019. [Online]. Available: <https://doi.org/10.1109/ivs.2019.8814089>
- [47] D. Dodel, M. Schötz, and N. Vödisch, "Fsoco: The formula student objects in context dataset," 2021.
- [48] T. H. Drage, J. Kalinowski, and T. Bräunl, "Development of an autonomous formula SAE car with laser scanner and GPS," *IFAC Proceedings Volumes*, vol. 47, no. 3, pp. 2652–2657, 2014. [Online]. Available: <https://doi.org/10.3182/20140824-6-za-1003.01386>
- [49] P. Drews, G. Williams, B. Goldfain, E. A. Theodorou, and J. M. Rehg, "Aggressive deep driving: Model predictive control with a cnn cost model," 2017.
- [50] —, "Vision-based high-speed driving with a deep dynamic observer," *IEEE Robotics and Automation Letters*, vol. 4, no. 2, pp. 1564–1571, Apr. 2019. [Online]. Available: <https://doi.org/10.1109/lra.2019.2896449>
- [51] S. Eken, M. Şara, Y. Satılmış, M. Karşlı, M. F. Tufan, H. Menhour, and A. Sayar, "A reproducible educational plan to teach mini autonomous race car programming," *The International Journal of Electrical Engineering & Education*, vol. 57, no. 4, pp. 340–360, Feb. 2020. [Online]. Available: <https://doi.org/10.1177/0020720920907879>
- [52] B. Evans, H. A. Engelbrecht, and H. W. Jordaan, "From navigation to racing: Reward signal design for autonomous racing," 2021.
- [53] B. Evans, H. W. Jordaan, and H. A. Engelbrecht, "Autonomous obstacle avoidance by learning policies for reference modification," 2021.
- [54] D. Falanga, S. Kim, and D. Scaramuzza, "How fast is too fast? the role of perception latency in high-speed sense and avoid," *IEEE Robotics and Automation Letters*, vol. 4, no. 2, pp. 1884–1891, Apr. 2019. [Online]. Available: <https://doi.org/10.1109/lra.2019.2898117>
- [55] S. Feraco, S. Luciani, A. Bonfitto, N. Amati, and A. Tonoli, "A local trajectory planning and control method for autonomous vehicles based on the RRT algorithm," in *2020 AEIT International*

- Conference of Electrical and Electronic Technologies for Automotive (AEIT AUTOMOTIVE)*. IEEE, Nov. 2020. [Online]. Available: <https://doi.org/10.23919/aeitautomotive50086.2020.9307439>
- [56] A. Foris, N. Wagener, B. Boots, and A. Mazumdar, "Exploiting singular configurations for controllable, low-power friction enhancement on unmanned ground vehicles," *IEEE Robotics and Automation Letters*, vol. 5, no. 2, pp. 3556–3563, Apr. 2020. [Online]. Available: <https://doi.org/10.1109/lra.2020.2977266>
- [57] M. Fu, J. Ni, X. Li, and J. Hu, "Path tracking for autonomous race car based on g-g diagram," *International Journal of Automotive Technology*, vol. 19, no. 4, pp. 659–668, Jun. 2018. [Online]. Available: <https://doi.org/10.1007/s12239-018-0063-7>
- [58] F. Fuchs, Y. Song, E. Kaufmann, D. Scaramuzza, and P. Durr, "Super-human performance in gran turismo sport using deep reinforcement learning," *IEEE Robotics and Automation Letters*, vol. 6, no. 3, pp. 4257–4264, Jul. 2021. [Online]. Available: <https://doi.org/10.1109/lra.2021.3064284>
- [59] N. Funk, N. Alatur, R. Deuber, F. Gonon, N. Messikommer, J. Nubert, M. Patriarca, S. Schaefer, D. Scotoni, N. Bünger, R. Dube, R. Khanna, M. Pfeiffer, E. Wilhelm, and R. Siegwart, "Autonomous electric race car design," 2017.
- [60] J. Funke, P. Theodosios, R. Hindiyeh, G. Stanek, K. Kritatakirana, C. Gerdes, D. Langer, M. Hernandez, B. Muller-Bessler, and B. Huhnke, "Up to the limits: Autonomous audi TTS," in *2012 IEEE Intelligent Vehicles Symposium*. IEEE, Jun. 2012. [Online]. Available: <https://doi.org/10.1109/ivs.2012.6232212>
- [61] J. Funke, M. Brown, S. M. Erlien, and J. C. Gerdes, "Collision avoidance and stabilization for autonomous vehicles in emergency scenarios," *IEEE Transactions on Control Systems Technology*, vol. 25, no. 4, pp. 1244–1216, Jul. 2017. [Online]. Available: <https://doi.org/10.1109/tcst.2016.2599783>
- [62] M. S. Gandhi, B. Vlahov, J. Gibson, G. Williams, and E. A. Theodorou, "Robust model predictive path integral control: Analysis and performance guarantees," *IEEE Robotics and Automation Letters*, vol. 6, no. 2, pp. 1423–1430, Apr. 2021. [Online]. Available: <https://doi.org/10.1109/lra.2021.3057563>
- [63] J. Goh and J. C. Gerdes, "Simultaneous stabilization and tracking of basic automobile drifting trajectories," in *2016 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, Jun. 2016. [Online]. Available: <https://doi.org/10.1109/ivs.2016.7535448>
- [64] J. Goh, T. Goel, and J. C. Gerdes, "Speed control for robust path-tracking for automated vehicles at the tire-road friction limit," in *AVEC 18 -14th International Symposium on Advanced Vehicle Control*, 2018. [Online]. Available: https://ddl.stanford.edu/sites/g/files/sbiybj9456/f/marty_avec2018_fullpaper.pdf
- [65] —, "Toward automated vehicle control beyond the stability limits: Drifting along a general path," *Journal of Dynamic Systems, Measurement, and Control*, vol. 142, no. 2, Nov. 2019. [Online]. Available: <https://doi.org/10.1115/1.4045320>
- [66] B. Goldfain, P. Drews, C. You, M. Barulic, O. Velez, P. Tsiotras, and J. M. Rehg, "AutoRally: An open platform for aggressive autonomous driving," *IEEE Control Systems*, vol. 39, no. 1, pp. 26–55, Feb. 2019. [Online]. Available: <https://doi.org/10.1109/mcs.2018.2876958>
- [67] N. Gosala, A. Buhler, M. Prajapat, C. Ehmke, M. Gupta, R. Sivanesan, A. Gawel, M. Pfeiffer, M. Burki, I. Sa, R. Dube, and R. Siegwart, "Redundant perception and state estimation for reliable autonomous racing," in *2019 International Conference on Robotics and Automation (ICRA)*. IEEE, May 2019. [Online]. Available: <https://doi.org/10.1109/icra.2019.8794155>
- [68] A. Gotlib, K. Lukojc, and M. Szczygielski, "Localization-based software architecture for 1:10 scale autonomous car," in *2019 International Interdisciplinary PhD Workshop (IIPhDW)*. IEEE, May 2019. [Online]. Available: <https://doi.org/10.1109/iiphdw.2019.8755418>
- [69] F. Gottmann, H. Wind, and O. Sawodny, "On the influence of rear axle steering and modeling depth on a model based racing line generation for autonomous racing," in *2018 IEEE Conference on Control Technology and Applications (CCTA)*. IEEE, Aug. 2018. [Online]. Available: <https://doi.org/10.1109/ccta.2018.8511508>
- [70] K. Guckiran and B. Bolat, "Autonomous car racing in simulation environment using deep reinforcement learning," in *2019 Innovations in Intelligent Systems and Applications Conference (ASYU)*. IEEE, Oct. 2019. [Online]. Available: <https://doi.org/10.1109/asyu48272.2019.8946332>
- [71] I. Gundlach and U. Konigorski, "Modellbasierte online-trajektorienplanung für zeitoptimale rennlinien," *at - Automatisierungstechnik*, vol. 67, no. 9, pp. 799–813, Sep. 2019. [Online]. Available: <https://doi.org/10.1515/auto-2019-0032>
- [72] P. K. Gundu, K. G. Vamvoudakis, and R. M. Gerdes, "An intermittent learning algorithm for high-speed autonomous driving in unknown environments," in *2019 American Control Conference (ACC)*. IEEE, Jul. 2019. [Online]. Available: <https://doi.org/10.23919/acc.2019.8814462>
- [73] G. Rong, B. H. Shin, H. Tabatabaee, Q. Lu, S. Lemke, M. Mozeiko, E. Boise, G. Uhm, M. Gerow, S. Mehta, E. Agafonov, T. H. Kim, E. Sterner, K. Ushiroda, M. Reyes, D. Zelenkovsky, and S. Kim, "SVL Simulator: A High Fidelity Simulator for Autonomous Driving," *arXiv e-prints*, p. arXiv:2005.03778, May 2020.
- [74] K. Hart, C. Montella, G. Petitpas, D. Schweisinger, A. Shariati, B. Sourbeer, T. Trephan, and J. Spletzer, "RoSCAR," in *Proceedings of the 2014 workshop on Mobile augmented reality and robotic technology-based systems - MARS '14*. ACM Press, 2014. [Online]. Available: <https://doi.org/10.1145/2609829.2609837>
- [75] A. Heilmeyer, M. Graf, and M. Lienkamp, "A race simulation for strategy decisions in circuit motorsports," in *2018 21st International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, Nov. 2018. [Online]. Available: <https://doi.org/10.1109/itsc.2018.8570012>
- [76] A. Heilmeyer, A. Wischniewski, L. Hermansdorfer, J. Betz, M. Lienkamp, and B. Lohmann, "Minimum curvature trajectory planning and control for an autonomous race car," *Vehicle System Dynamics*, vol. 58, no. 10, pp. 1497–1527, Jun. 2019. [Online]. Available: <https://doi.org/10.1080/00423114.2019.1631455>
- [77] A. Heilmeyer, M. Geisslinger, and J. Betz, "A quasi-steady-state lap time simulation for electrified race cars," in *2019 Fourteenth International Conference on Ecological Vehicles and Renewable Energies (EVER)*. IEEE, May 2019. [Online]. Available: <https://doi.org/10.1109/ever.2019.8813646>
- [78] J. Herman, J. Francis, S. Ganju, B. Chen, A. Koul, A. Gupta, A. Skabelkin, I. Zhukov, M. Kumskey, and E. Nyberg, "Learn-to-race: A multimodal control environment for autonomous racing," 2021.
- [79] L. Hermansdorfer, J. Betz, and M. Lienkamp, "A concept for estimation and prediction of the tire-road friction potential for an autonomous racecar," in *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*. IEEE, Oct. 2019. [Online]. Available: <https://doi.org/10.1109/itsc.2019.8917024>
- [80] —, "Benchmarking of a software stack for autonomous racing against a professional human race driver," in *2020 Fifteenth International Conference on Ecological Vehicles and Renewable Energies (EVER)*. IEEE, Sep. 2020. [Online]. Available: <https://doi.org/10.1109/ever48776.2020.9242926>
- [81] L. Hermansdorfer, R. Trauth, J. Betz, and M. Lienkamp, "End-to-end neural network for vehicle dynamics modeling," in *2020 6th IEEE Congress on Information Science and Technology (CiST)*. IEEE, Jun. 2020. [Online]. Available: <https://doi.org/10.1109/cist49399.2021.9357196>
- [82] T. Herrmann, F. Christ, J. Betz, and M. Lienkamp, "Energy management strategy for an autonomous electric racecar using optimal control," in *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*. IEEE, Oct. 2019. [Online]. Available: <https://doi.org/10.1109/itsc.2019.8917154>
- [83] T. Herrmann, F. Passigato, J. Betz, and M. Lienkamp, "Minimum race-time planning-strategy for an autonomous electric racecar," in *2020 IEEE 23rd International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, Sep. 2020. [Online]. Available: <https://doi.org/10.1109/itsc45102.2020.9294681>
- [84] T. Herrmann, A. Wischniewski, L. Hermansdorfer, J. Betz, and M. Lienkamp, "Real-time adaptive velocity optimization for autonomous electric cars at the limits of handling," *IEEE Transactions on Intelligent Vehicles*, pp. 1–1, 2020. [Online]. Available: <https://doi.org/10.1109/tiv.2020.3047858>
- [85] T. Herrmann, F. Sauerbeck, M. Bayerlein, J. Betz, and M. Lienkamp, "Optimization-based real-time-capable energy strategy for autonomous electric race cars [saeindextestsamplv2 2022-01-17t10:06:32.798262z]," *SAE International Journal of Connected and Automated Vehicles*, vol. 5, no. 1, Jan. 2022.
- [86] L. Hewing, A. Liniger, and M. N. Zeilinger, "Cautious NMPC with gaussian process dynamics for autonomous miniature race cars," in *2018 European Control Conference (ECC)*. IEEE, Jun. 2018. [Online]. Available: <https://doi.org/10.23919/ecc.2018.8550162>
- [87] R. Y. Hindiyeh and J. C. Gerdes, "A controller framework for autonomous drifting: Design, stability, and experimental validation," *Journal of Dynamic Systems, Measurement, and Control*, vol. 136, no. 5, Jul. 2014. [Online]. Available: <https://doi.org/10.1115/1.4027471>

- [88] I. Georgiev, C. Chatzikomis, T. Völkl, J. Smith, and M. N. Mistry, "Iterative semi-parametric dynamics model learning for autonomous racing," *CoRR*, vol. abs/2011.08750, 2020. [Online]. Available: <https://arxiv.org/abs/2011.08750>
- [89] R. Ivanov, T. J. Carpenter, J. Weimer, R. Alur, G. J. Pappas, and I. Lee, "Case study," in *Proceedings of the 23rd International Conference on Hybrid Systems: Computation and Control*. ACM, Apr. 2020. [Online]. Available: <https://doi.org/10.1145/3365365.3382216>
- [90] A. Jain, M. O'Kelly, P. Chaudhari, and M. Morari, "Bayesrace: Learning to race autonomously using prior experience," 2020.
- [91] M. Jaritz, R. de Charette, M. Toromanoff, E. Perot, and F. Nashashibi, "End-to-end race driving with deep reinforcement learning," in *2018 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2018. [Online]. Available: <https://doi.org/10.1109/icra.2018.8460934>
- [92] J. H. Jeon, R. V. Cowlagi, S. C. Peters, S. Karaman, E. Frazzoli, P. Tsiotras, and K. Iagnemma, "Optimal motion planning with the half-car dynamical model for autonomous high-speed driving," in *2013 American Control Conference*. IEEE, Jun. 2013. [Online]. Available: <https://doi.org/10.1109/acc.2013.6579835>
- [93] X. Ji, X. He, C. Lv, Y. Liu, and J. Wu, "Adaptive-neural-network-based robust lateral motion control for autonomous vehicle at driving limits," *Control Engineering Practice*, vol. 76, pp. 41–53, Jul. 2018. [Online]. Available: <https://doi.org/10.1016/j.conengprac.2018.04.007>
- [94] E. Joa, H. Cha, Y. Hyun, Y. Koh, K. Yi, and J. Park, "A new control approach for automated drifting in consideration of the driving characteristics of an expert human driver," *Control Engineering Practice*, vol. 96, p. 104293, Mar. 2020. [Online]. Available: <https://doi.org/10.1016/j.conengprac.2019.104293>
- [95] A. Joglekar, B. Deshpande, M. Basuthakur, and V. N. Krovi, "Fusing offline and online trajectory optimization techniques for goal-to-goal navigation of a scaled autonomous vehicle," in *SAE Technical Paper Series*. SAE International, Apr. 2021. [Online]. Available: <https://doi.org/10.4271/2021-01-0097>
- [96] J. Kabzan, L. Hewing, A. Liniger, and M. N. Zeilinger, "Learning-based model predictive control for autonomous racing," *IEEE Robotics and Automation Letters*, vol. 4, no. 4, pp. 3363–3370, Oct. 2019. [Online]. Available: <https://doi.org/10.1109/lra.2019.2926677>
- [97] J. Kabzan, M. I. Valls, V. J. F. Reijgwart, H. F. C. Hendriks, C. Ehmke, M. Prajapat, A. Bühler, N. Gosala, M. Gupta, R. Sivanesan, A. Dhall, E. Chisari, N. Karnchanachari, S. Brits, M. Dangel, I. Sa, R. Dubé, A. Gawel, M. Pfeiffer, A. Liniger, J. Lygeros, and R. Siegwart, "AMZ driverless: The full autonomous racing system," *Journal of Field Robotics*, Aug. 2020. [Online]. Available: <https://doi.org/10.1002/rob.21977>
- [98] N. R. Kapania and J. C. Gerdes, "Design of a feedback-feedforward steering controller for accurate path tracking and stability at the limits of handling," *Vehicle System Dynamics*, vol. 53, no. 12, pp. 1687–1704, Jun. 2015. [Online]. Available: <https://doi.org/10.1080/00423114.2015.1055279>
- [99] —, "Path tracking of highly dynamic autonomous vehicle trajectories via iterative learning control," in *2015 American Control Conference (ACC)*. IEEE, Jul. 2015. [Online]. Available: <https://doi.org/10.1109/acc.2015.7171151>
- [100] N. R. Kapania, J. Subosits, and J. C. Gerdes, "A sequential two-step algorithm for fast generation of vehicle racing trajectories," *Journal of Dynamic Systems, Measurement, and Control*, vol. 138, no. 9, Jun. 2016. [Online]. Available: <https://doi.org/10.1115/1.4033311>
- [101] N. R. Kapania and J. C. Gerdes, "Learning at the racetrack: Data-driven methods to improve racing performance over multiple laps," *IEEE Transactions on Vehicular Technology*, vol. 69, no. 8, pp. 8232–8242, Aug. 2020. [Online]. Available: <https://doi.org/10.1109/tvt.2020.2998065>
- [102] S. Karaman, A. Anders, M. Boulet, J. Connor, K. Gregson, W. Guerra, O. Guldner, M. Mohamoud, B. Plancher, R. Shin, and J. Vivilecchia, "Project-based, collaborative, algorithmic robotics for high school students: Programming self-driving race cars at MIT," in *2017 IEEE Integrated STEM Education Conference (ISEC)*. IEEE, 2017. [Online]. Available: <https://doi.org/10.1109/isecon.2017.7910242>
- [103] J. C. Kegelman, L. K. Harbott, and J. C. Gerdes, "Insights into vehicle trajectories at the handling limits: analysing open data from race car drivers," *Vehicle System Dynamics*, vol. 55, no. 2, pp. 191–207, Nov. 2016. [Online]. Available: <https://doi.org/10.1080/00423114.2016.1249893>
- [104] D. P. Kelly and R. S. Sharp, "Time-optimal control of the race car: a numerical method to emulate the ideal driver," *Vehicle System Dynamics*, vol. 48, no. 12, pp. 1461–1474, Aug. 2010. [Online]. Available: <https://doi.org/10.1080/00423110903514236>
- [105] T. Kessler, K. Esterle, and A. Knoll, "Linear differential games for cooperative behavior planning of autonomous vehicles using mixed-integer programming," in *2020 59th IEEE Conference on Decision and Control (CDC)*. IEEE, Dec. 2020. [Online]. Available: <https://doi.org/10.1109/cdc42340.2020.9304495>
- [106] D. Kloeser, T. Schoels, T. Sartor, A. Zanelli, G. Prison, and M. Diehl, "NMPC for racing using a singularity-free path-parametric model with obstacle avoidance," *IFAC-PapersOnLine*, vol. 53, no. 2, pp. 14324–14329, 2020. [Online]. Available: <https://doi.org/10.1016/j.ifacol.2020.12.1376>
- [107] B. Korkmaz, U. B. Etlik, A. Beke, and T. Kumbasar, "Fuzzy logic based self-driving racing car control system," in *2018 6th International Conference on Control Engineering & Information Technology (CEIT)*. IEEE, Oct. 2018. [Online]. Available: <https://doi.org/10.1109/ceit.2018.8751900>
- [108] K. Kritayakirana and J. C. Gerdes, "Autonomous cornering at the limits: Maximizing a "g-g" diagram by using feedforward trail-braking and throttle-on-exit," *IFAC Proceedings Volumes*, vol. 43, no. 7, pp. 548–553, Jul. 2010. [Online]. Available: <https://doi.org/10.3182/20100712-3-de-2013.00060>
- [109] —, "Using the centre of percussion to design a steering controller for an autonomous race car," *Vehicle System Dynamics*, vol. 50, no. suppl, pp. 33–51, Jan. 2012. [Online]. Available: <https://doi.org/10.1080/00423114.2012.672842>
- [110] —, "Autonomous vehicle control at the limits of handling," *International Journal of Vehicle Autonomous Systems*, vol. 10, no. 4, p. 271, 2012. [Online]. Available: <https://doi.org/10.1504/ijvas.2012.051270>
- [111] P. W. Kuhn, "Methodology for the numerical calculation of racing lines and the virtual assessment of driving behavior for training circuits for the automobile industry," *Transportation Research Procedia*, vol. 25, pp. 1416–1429, 2017. [Online]. Available: <https://doi.org/10.1016/j.trpro.2017.05.167>
- [112] V. A. Laurence, J. Y. Goh, and J. C. Gerdes, "Path-tracking for autonomous vehicles at the limit of friction," in *2017 American Control Conference (ACC)*. IEEE, May 2017. [Online]. Available: <https://doi.org/10.23919/acc.2017.7963824>
- [113] V. Laurence and C. Gerdes, "Speed control for robust path-tracking for automated vehicles at the tire-road friction limit," in *AVEC 18 -14th International Symposium on Advanced Vehicle Control*, 2018. [Online]. Available: <https://ddl.stanford.edu/publications/speed-control-robust-path-tracking-automated-vehicles-tire-road/-friction-limit>
- [114] K. Lee, G. N. An, V. Zakharov, and E. A. Theodorou, "Perceptual attention-based predictive control," 2019.
- [115] K. Lee, Z. Wang, B. I. Vlahov, H. K. Brar, and E. A. Theodorou, "Ensemble bayesian decision making with redundant deep perceptual control policies," 2020.
- [116] N. L. Large, F. Bieder, and M. Lauer, "Comparison of different SLAM approaches for a driverless race car," *tm - Technisches Messen*, vol. 88, no. 4, pp. 227–236, Mar. 2021. [Online]. Available: <https://doi.org/10.1515/teme-2021-0004>
- [117] A. Liniger, A. Domahidi, and M. Morari, "Optimization-based autonomous racing of 1:43 scale RC cars," *Optimal Control Applications and Methods*, vol. 36, no. 5, pp. 628–647, Jul. 2014. [Online]. Available: <https://doi.org/10.1002/oca.2123>
- [118] A. Liniger and J. Lygeros, "A viability approach for fast recursive feasible finite horizon path planning of autonomous RC cars," in *Proceedings of the 18th International Conference on Hybrid Systems: Computation and Control*. ACM, Apr. 2015. [Online]. Available: <https://doi.org/10.1145/2728606.2728620>
- [119] A. Liniger, X. Zhang, P. Aeschbach, A. Georgiou, and J. Lygeros, "Racing miniature cars: Enhancing performance using stochastic MPC and disturbance feedback," in *2017 American Control Conference (ACC)*. IEEE, May 2017. [Online]. Available: <https://doi.org/10.23919/acc.2017.7963833>
- [120] A. Liniger, "Path planning and control for autonomous racing," Ph.D. dissertation, ETH Zurich, 2018. [Online]. Available: <http://hdl.handle.net/20.500.11850/302942>
- [121] A. Liniger and J. Lygeros, "Real-time control for autonomous racing based on viability theory," *IEEE Transactions on Control Systems Technology*, vol. 27, no. 2, pp. 464–478, Mar. 2019. [Online]. Available: <https://doi.org/10.1109/tcst.2017.2772903>
- [122] —, "A noncooperative game approach to autonomous racing," *IEEE Transactions on Control Systems Technology*, vol. 28, no. 3, pp.

- 884–897, May 2020. [Online]. Available: <https://doi.org/10.1109/tcst.2019.2895282>
- [123] Y. Liu, L. Shi, W. Xu, X. Xiong, W. Sun, and L. Qu, “Design of driverless racing chassis based on MPC,” in *2020 Chinese Automation Congress (CAC)*. IEEE, Nov. 2020. [Online]. Available: <https://doi.org/10.1109/cac51589.2020.9326482>
- [124] D. Loiacono, A. Prete, P. L. Lanzi, and L. Cardamone, “Learning to overtake in TORCS using simple reinforcement learning,” in *IEEE Congress on Evolutionary Computation*. IEEE, Jul. 2010. [Online]. Available: <https://doi.org/10.1109/cec.2010.5586191>
- [125] S. Lovato and M. Massaro, “Three-dimensional fixed-trajectory approaches to the minimum-lap time of road vehicles,” *Vehicle System Dynamics*, pp. 1–18, Aug. 2021. [Online]. Available: <https://doi.org/10.1080/00423114.2021.1969024>
- [126] Y. Mahmoud, Y. Okuyama, T. Fukuchi, T. Kosuke, and I. Ando, “Optimizing deep-neural-network-driven autonomous race car using image scaling,” *SHS Web of Conferences*, vol. 77, p. 04002, 2020. [Online]. Available: <https://doi.org/10.1051/shsconf/20207704002>
- [127] F. Massa, L. Bonamini, A. Settimi, L. Pallottino, and D. Caporale, “LiDAR-based GNSS denied localization for autonomous racing cars,” *Sensors*, vol. 20, no. 14, p. 3992, Jul. 2020. [Online]. Available: <https://doi.org/10.3390/s20143992>
- [128] D. Metz and D. Williams, “Near time-optimal control of racing vehicles,” *Automatica*, vol. 25, no. 6, pp. 841–857, Nov. 1989. [Online]. Available: [https://doi.org/10.1016/0005-1098\(89\)90052-6](https://doi.org/10.1016/0005-1098(89)90052-6)
- [129] M. Montani, L. Ronchi, R. Capitani, and C. Annicchiarico, “A hierarchical autonomous driver for a racing car: Real-time planning and tracking of the trajectory,” *Energies*, vol. 14, no. 19, p. 6008, Sep. 2021. [Online]. Available: <https://doi.org/10.3390/en14196008>
- [130] S. Nekkah, J. Janus, M. Boxheimer, L. Ohnemus, S. Hirsch, B. Schmidt, Y. Liu, D. Borbély, F. Keck, K. Bachmann, and L. Bleszynski, “The autonomous racing software stack of the kit19d,” 2020.
- [131] J. Ni and J. Hu, “Path following control for autonomous formula racecar: Autonomous formula student competition,” in *2017 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, Jun. 2017. [Online]. Available: <https://doi.org/10.1109/ivs.2017.7995972>
- [132] J. Ni, J. Hu, and C. Xiang, “Robust path following control at driving/handling limits of an autonomous electric racecar,” *IEEE Transactions on Vehicular Technology*, vol. 68, no. 6, pp. 5518–5526, Jun. 2019. [Online]. Available: <https://doi.org/10.1109/tvt.2019.2911862>
- [133] J. Niu, Y. Hu, B. Jin, Y. Han, and X. Li, “Two-stage safe reinforcement learning for high-speed autonomous racing,” in *2020 IEEE International Conference on Systems, Man, and Cybernetics (SMC)*. IEEE, Oct. 2020. [Online]. Available: <https://doi.org/10.1109/smc42975.2020.9283053>
- [134] F. Nobis, J. Betz, L. Hermansdorfer, and M. Lienkamp, “Autonomous racing: A comparison of slam algorithms for large scale outdoor environment,” in *Proceedings of the 2019 3rd International Conference on Virtual and Augmented Reality Simulations*. ACM, Feb. 2019. [Online]. Available: <https://doi.org/10.1145/3332305.3332319>
- [135] G. Notomista, M. Wang, M. Schwager, and M. Egerstedt, “Enhancing game-theoretic autonomous car racing using control barrier functions,” in *2020 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2020. [Online]. Available: <https://doi.org/10.1109/icra40945.2020.9196757>
- [136] T. Novi, A. Liniger, R. Capitani, and C. Annicchiarico, “Real-time control for at-limit handling driving on a predefined path,” *Vehicle System Dynamics*, vol. 58, no. 7, pp. 1007–1036, Apr. 2019. [Online]. Available: <https://doi.org/10.1080/00423114.2019.1605081>
- [137] M. O’Kelly, V. Sukhil, H. Abbas, J. Harkins, G. Kao, Y. V. Pant, R. Mangharam, D. Agarwal, M. Behl, P. Burgio, and M. Bertogna, “F1/10: An open-source autonomous cyber-physical platform,” 2019.
- [138] M. O’Kelly, H. Zheng, D. Karthik, and R. Mangharam, “F1tenth: An open-source evaluation environment for continuous control and reinforcement learning,” in *Proceedings of the NeurIPS 2019 Competition and Demonstration Track*, ser. Proceedings of Machine Learning Research, H. J. Escalante and R. Hadsell, Eds., vol. 123. PMLR, 08–14 Dec 2020, pp. 77–89. [Online]. Available: <http://proceedings.mlr.press/v123/o-kelly20a.html>
- [139] M. O’Kelly, H. Zheng, A. Jain, J. Auckley, K. Luong, and R. Mangharam, “TUNERCAR: A superoptimization toolchain for autonomous racing,” in *2020 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2020. [Online]. Available: <https://doi.org/10.1109/icra40945.2020.9197080>
- [140] R. Oliveira, F. H. M. Rocha, L. Ott, V. Guizilini, F. Ramos, and V. Grassi, “Learning to race through coordinate descent bayesian optimisation,” in *2018 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2018. [Online]. Available: <https://doi.org/10.1109/icra.2018.8460735>
- [141] E. Pagot, M. Piccinini, and F. Biral, “Real-time optimal control of an autonomous RC car with minimum-time maneuvers and a novel kineto-dynamical model,” in *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, Oct. 2020. [Online]. Available: <https://doi.org/10.1109/iros45743.2020.9340640>
- [142] P. R. Palafox, J. Betz, F. Nobis, K. Riedl, and M. Lienkamp, “SemanticDepth: Fusing semantic segmentation and monocular depth estimation for enabling autonomous driving in roads without lane lines,” *Sensors*, vol. 19, no. 14, p. 3224, Jul. 2019. [Online]. Available: <https://doi.org/10.3390/s19143224>
- [143] Y. Pan, C.-A. Cheng, K. Saigol, K. Lee, X. Yan, E. Theodorou, and B. Boots, “Agile autonomous driving using end-to-end deep imitation learning,” in *Robotics: Science and Systems XIV*. Robotics: Science and Systems Foundation, Jun. 2018. [Online]. Available: <https://doi.org/10.15607/rss.2018.xiv.056>
- [144] H. Park and J. C. Gerdes, “Optimal tire force allocation for trajectory tracking with an over-actuated vehicle,” in *2015 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, Jun. 2015. [Online]. Available: <https://doi.org/10.1109/ivs.2015.7225820>
- [145] —, “Analysis of feasible tire force regions for optimal tire force allocation with limited actuation,” *IEEE Intelligent Transportation Systems Magazine*, vol. 9, no. 3, pp. 75–87, 2017. [Online]. Available: <https://doi.org/10.1109/mts.2017.7209879>
- [146] S. Pedone and A. Fagiolini, “Racecar longitudinal control in unknown and highly-varying driving conditions,” *IEEE Transactions on Vehicular Technology*, vol. 69, no. 11, pp. 12 521–12 535, Nov. 2020. [Online]. Available: <https://doi.org/10.1109/tvt.2020.3023059>
- [147] W. zheng Peng, Y. hui Ao, J. hui He, and P. fei Wang, “Vehicle odometry with camera-lidar-IMU information fusion and factor-graph optimization,” *Journal of Intelligent & Robotic Systems*, vol. 101, no. 4, Apr. 2021. [Online]. Available: <https://doi.org/10.1007/s10846-021-01329-x>
- [148] D. Perez, Y. Saez, G. Recio, and P. Isasi, “Evolving a rule system controller for automatic driving in a car racing competition,” in *2008 IEEE Symposium On Computational Intelligence and Games*. IEEE, Dec. 2008. [Online]. Available: <https://doi.org/10.1109/cig.2008.5035659>
- [149] E. Perot, M. Jaritz, M. Toromanoff, and R. D. Charette, “End-to-end driving in a realistic racing game with deep reinforcement learning,” in *2017 IEEE Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*. IEEE, Jul. 2017. [Online]. Available: <https://doi.org/10.1109/cvprw.2017.64>
- [150] F. K. Pour, D. Theilliol, V. Puig, and G. Cembrano, “Health-aware control design based on remaining useful life estimation for autonomous racing vehicle,” *ISA Transactions*, vol. 113, pp. 196–209, Jul. 2021. [Online]. Available: <https://doi.org/10.1016/j.isatra.2020.03.032>
- [151] P. Puchtler and R. Peinl, “Evaluation of deep learning accelerators for object detection at the edge,” in *Lecture Notes in Computer Science*. Springer International Publishing, 2020, pp. 320–326. [Online]. Available: https://doi.org/10.1007/978-3-030-58285-2_29
- [152] J. Quadflieg, M. Preuss, and G. Rudolph, “Driving faster than a human player,” in *Applications of Evolutionary Computation*. Springer Berlin Heidelberg, 2011, pp. 143–152. [Online]. Available: https://doi.org/10.1007/978-3-642-20525-5_15
- [153] A. Remonda, S. Krebs, E. Veas, G. Luzhnica, and R. Kern, “Formula rl: Deep reinforcement learning for autonomous racing using telemetry data,” *Unpublished*, 2019. [Online]. Available: <http://rgdoi.net/10.13140/RG.2.2.30678.09283>
- [154] A. Remonda, E. Veas, and G. Luzhnica, “Comparing driving behavior of humans and autonomous driving in a professional racing simulator,” *PLOS ONE*, vol. 16, no. 2, p. e0245320, Feb. 2021. [Online]. Available: <https://doi.org/10.1371/journal.pone.0245320>
- [155] T. Renzler, M. Stolz, M. Schratte, and D. Watzenig, “Increased accuracy for fast moving LiDARS: Correction of distorted point clouds,” in *2020 IEEE International Instrumentation and Measurement Technology Conference (I2MTC)*. IEEE, May 2020. [Online]. Available: <https://doi.org/10.1109/i2mtc43012.2020.9128372>
- [156] U. Rosolia, A. Carvalho, and F. Borrelli, “Autonomous racing using learning model predictive control,” in *2017 American Control Conference (ACC)*. IEEE, May 2017. [Online]. Available: <https://doi.org/10.23919/acc.2017.7963748>
- [157] U. Rosolia and F. Borrelli, “Learning model predictive control for iterative tasks: A computationally efficient approach for linear

- system,” *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 3142–3147, Jul. 2017. [Online]. Available: <https://doi.org/10.1016/j.ifacol.2017.08.324>
- [158] U. Rosolia, X. Zhang, and F. Borrelli, “Robust learning model predictive control for iterative tasks: Learning from experience,” in *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*. IEEE, Dec. 2017. [Online]. Available: <https://doi.org/10.1109/cdc.2017.8263812>
- [159] U. Rosolia and F. Borrelli, “Learning how to autonomously race a car: A predictive control approach,” *IEEE Transactions on Control Systems Technology*, vol. 28, no. 6, pp. 2713–2719, Nov. 2020. [Online]. Available: <https://doi.org/10.1109/tcst.2019.2948135>
- [160] A. Rucco, G. Notarstefano, and J. Hauser, “An efficient minimum-time trajectory generation strategy for two-track car vehicles,” *IEEE Transactions on Control Systems Technology*, vol. 23, no. 4, pp. 1505–1519, Jul. 2015. [Online]. Available: <https://doi.org/10.1109/tcst.2014.2377777>
- [161] M. Salem, A. M. Mora, J. J. Merelo, and P. García-Sánchez, “Driving in TORCS using modular fuzzy controllers,” in *Applications of Evolutionary Computation*. Springer International Publishing, 2017, pp. 361–376. [Online]. Available: https://doi.org/10.1007/978-3-319-55849-3_24
- [162] M. Salem, A. M. Mora, and J. J. Merelo, “The evolutionary race: Improving the process of evaluating car controllers in racing simulators,” in *2018 IEEE Conference on Computational Intelligence and Games (CIG)*. IEEE, Aug. 2018. [Online]. Available: <https://doi.org/10.1109/cig.2018.8490364>
- [163] —, “Beating uncertainty in racing bot evolution through enhanced exploration and pole position selection,” in *2019 IEEE Conference on Games (CoG)*. IEEE, Aug. 2019. [Online]. Available: <https://doi.org/10.1109/cig.2019.8847998>
- [164] J. P. S. Mejia, P. A. Theodosis, and J. C. Gerdes, “Using a path-fitting algorithm to analyze the racing techniques of a skilled driver,” in *Volume 3: Nonlinear Estimation and Control; Optimization and Optimal Control; Piezoelectric Actuation and Nanoscale Control; Robotics and Manipulators; Sensing; System Identification (Estimation for Automotive Applications, Modeling, Therapeutic Control in Bio-Systems); Variable Structure/Sliding-Mode Control; Vehicles and Human Robotics; Vehicle Dynamics and Control; Vehicle Path Planning and Collision Avoidance; Vibrational and Mechanical Systems; Wind Energy Systems and Control*. American Society of Mechanical Engineers, Oct. 2013. [Online]. Available: <https://doi.org/10.1115/dscc2013-4106>
- [165] F. Sauerbeck, L. Baierlein, J. Betz, and M. Lienkamp, “A combined lidar-camera localization for autonomous race cars [saeindextestsamplev2 2022-01-18t10:06:44.605496z],” *SAE International Journal of Connected and Automated Vehicles*, vol. 5, no. 1, jan 2022. [Online]. Available: <https://doi.org/10.4271/12-05-01-0006>
- [166] W. Schwarting, T. Seyde, I. Gilitschenski, L. Liebenwein, R. Sander, S. Karaman, and D. Rus, “Deep latent competition: Learning to race using visual control policies in latent space,” 2021.
- [167] W. Schwarting, A. Pierson, S. Karaman, and D. Rus, “Stochastic dynamic games in belief space,” *IEEE Transactions on Robotics*, pp. 1–16, 2021. [Online]. Available: <https://doi.org/10.1109/tro.2021.3075376>
- [168] A. Sinha, M. O’Kelly, H. Zheng, R. Mangharam, J. Duchi, and R. Tedrake, “FormulaZero: Distributionally robust online adaptation via offline population synthesis,” in *Proceedings of the 37th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, H. D. III and A. Singh, Eds., vol. 119. PMLR, 13–18 Jul 2020, pp. 8992–9004. [Online]. Available: <http://proceedings.mlr.press/v119/sinha20a.html>
- [169] Y. Song, H. Lin, E. Kaufmann, P. Duerr, and D. Scaramuzza, “Autonomous overtaking in gran turismo sport using curriculum reinforcement learning,” 2021.
- [170] N. A. Spielberg, M. Brown, N. R. Kapania, J. C. Kegelmann, and J. C. Gerdes, “Neural network vehicle models for high-performance automated driving,” *Science Robotics*, vol. 4, no. 28, p. eaaw1975, Mar. 2019. [Online]. Available: <https://doi.org/10.1126/scirobotics.aaw1975>
- [171] S. S. Srinivasa, P. Lancaster, J. Michalove, M. Schmittle, C. Summers, M. Rockett, J. R. Smith, S. Choudhury, C. Mavrogianis, and F. Sadeghi, “Mushr: A low-cost, open-source robotic racecar for education and research,” 2019.
- [172] S. Srinivasan, I. Sa, A. Zyner, V. Reijgwart, M. I. Valls, and R. Siegwart, “End-to-end velocity estimation for autonomous racing,” *IEEE Robotics and Automation Letters*, vol. 5, no. 4, pp. 6869–6875, Oct. 2020. [Online]. Available: <https://doi.org/10.1109/lra.2020.3016929>
- [173] S. Srinivasan, S. N. Giles, and A. Liniger, “A holistic motion planning and control solution to challenge a professional racecar driver,” 2021.
- [174] T. Stahl, A. Wischnewski, J. Betz, and M. Lienkamp, “ROS-based localization of a race vehicle at high-speed using LIDAR,” *E3S Web of Conferences*, vol. 95, p. 04002, 2019. [Online]. Available: <https://doi.org/10.1051/e3sconf/20199504002>
- [175] —, “Multilayer graph-based trajectory planning for race vehicles in dynamic scenarios,” in *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*. IEEE, Oct. 2019. [Online]. Available: <https://doi.org/10.1109/itsc.2019.8917032>
- [176] T. Stahl, M. Eicher, J. Betz, and F. Diermeyer, “Online verification concept for autonomous vehicles – illustrative study for a trajectory planning module,” in *2020 IEEE 23rd International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, Sep. 2020. [Online]. Available: <https://doi.org/10.1109/itsc45102.2020.9294703>
- [177] T. Stahl and J. Betz, “An open-source scenario architect for autonomous vehicles,” in *2020 Fifteenth International Conference on Ecological Vehicles and Renewable Energies (EVER)*. IEEE, Sep. 2020. [Online]. Available: <https://doi.org/10.1109/ever48776.2020.9243029>
- [178] T. Stahl and F. Diermeyer, “Online verification enabling approval of driving functions—implementation for a planner of an autonomous race vehicle,” *IEEE Open Journal of Intelligent Transportation Systems*, vol. 2, pp. 97–110, 2021. [Online]. Available: <https://doi.org/10.1109/ojits.2021.3078121>
- [179] K. Strobel, S. Zhu, R. Chang, and S. Koppula, “Accurate, low-latency visual perception for autonomous racing: Challenges, mechanisms, and practical solutions,” in *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, Oct. 2020. [Online]. Available: <https://doi.org/10.1109/iros45743.2020.9341683>
- [180] J. K. Subosits and J. C. Gerdes, “From the racetrack to the road: Real-time trajectory replanning for autonomous driving,” *IEEE Transactions on Intelligent Vehicles*, vol. 4, no. 2, pp. 309–320, Jun. 2019. [Online]. Available: <https://doi.org/10.1109/tiv.2019.2904390>
- [181] J. Subosits and J. C. Gerdes, “Impacts of model fidelity on trajectory optimization for autonomous vehicles in extreme maneuvers,” *IEEE Transactions on Intelligent Vehicles*, pp. 1–1, 2021. [Online]. Available: <https://doi.org/10.1109/tiv.2021.3051325>
- [182] V. Sukhil and M. Behl, “Adaptive lookahead pure-pursuit for autonomous racing,” 2021.
- [183] K. L. Talvala, K. Kritayakirana, and J. C. Gerdes, “Pushing the limits: From lanekeeping to autonomous racing,” *Annual Reviews in Control*, vol. 35, no. 1, pp. 137–148, Apr. 2011. [Online]. Available: <https://doi.org/10.1016/j.arcontrol.2011.03.009>
- [184] A. Tăulea-Codrean, T. Mariani, and S. Engell, “Design and simulation of a machine-learning and model predictive control approach to autonomous race driving for the f1/10 platform,” *IFAC-PapersOnLine*, vol. 53, no. 2, pp. 6031–6036, 2020. [Online]. Available: <https://doi.org/10.1016/j.ifacol.2020.12.1669>
- [185] P. A. Theodosis and J. C. Gerdes, “Generating a racing line for an autonomous racecar using professional driving techniques,” in *ASME 2011 Dynamic Systems and Control Conference and Bath/ASME Symposium on Fluid Power and Motion Control, Volume 2*. ASME, Jan. 2011. [Online]. Available: <https://doi.org/10.1115/dscc2011-6097>
- [186] —, “Nonlinear optimization of a racing line for an autonomous racecar using professional driving techniques,” in *Volume 1: Adaptive Control; Advanced Vehicle Propulsion Systems; Aerospace Systems; Autonomous Systems; Battery Modeling; Biochemical Systems; Control Over Networks; Control Systems Design; Cooperative and Decentralized Control; Dynamic System Modeling; Dynamical Modeling and Diagnostics in Biomedical Systems; Dynamics and Control in Medicine and Biology; Estimation and Fault Detection; Estimation and Fault Detection for Vehicle Applications; Fluid Power Systems; Human Assistive Systems and Wearable Robots; Human-in-the-Loop Systems; Intelligent Transportation Systems; Learning Control*. ASME, 2012. [Online]. Available: <https://doi.org/10.1115/dscc2012-movic2012-8620>
- [187] hanqing TIAN, J. NI, and J. HU, “Autonomous driving system design for formula student driverless racecar,” in *2018 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, Jun. 2018. [Online]. Available: <https://doi.org/10.1109/ivs.2018.8500471>
- [188] H. Tian, J. Ni, Z. Li, and J. Hu, “Autonomous formula racecar: Overall system design and experimental validation,” 2020.
- [189] E. Tramacere, S. Luciani, S. Feraco, A. Bonfitto, and N. Amati, “Processor-in-the-loop architecture design and experimental validation for an autonomous racing vehicle,” *Applied Sciences*, vol. 11, no. 16, p. 7225, Aug. 2021. [Online]. Available: <https://doi.org/10.3390/app11167225>

- [190] C. Vallon and F. Borrelli, "Task decomposition for iterative learning model predictive control," in *2020 American Control Conference (ACC)*. IEEE, Jul. 2020. [Online]. Available: <https://doi.org/10.23919/acc45564.2020.9147625>
- [191] M. I. Valls, H. F. Hendriks, V. J. Reijgwart, F. V. Meier, I. Sa, R. Dube, A. Gawel, M. Burki, and R. Siegwart, "Design of an autonomous racecar: Perception, state estimation and system integration," in *2018 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2018. [Online]. Available: <https://doi.org/10.1109/icra.2018.8462829>
- [192] B. van Niekerk, A. Damianou, and B. Rosman, "Online constrained model-based reinforcement learning," 2020.
- [193] J. L. Vazquez, M. Bruhlmeier, A. Liniger, A. Rupenyan, and J. Lygeros, "Optimization-based hierarchical motion planning for autonomous racing," in *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, Oct. 2020. [Online]. Available: <https://doi.org/10.1109/iros45743.2020.9341731>
- [194] R. Verschuere, M. Zanon, R. Quirynen, and M. Diehl, "Time-optimal race car driving using an online exact hessian based nonlinear MPC algorithm," in *2016 European Control Conference (ECC)*. IEEE, Jun. 2016. [Online]. Available: <https://doi.org/10.1109/ecc.2016.7810277>
- [195] C. Voser, R. Y. Hindiyeh, and J. C. Gerdes, "Analysis and control of high sideslip manoeuvres," *Vehicle System Dynamics*, vol. 48, no. suppl, pp. 317–336, Dec. 2010. [Online]. Available: <https://doi.org/10.1080/00423111003746140>
- [196] E. Wachter, A. Schmetz, F. Bruzelius, and M. Alirezaei, "Path control in limits of vehicle handling: A sensitivity analysis," in *Lecture Notes in Mechanical Engineering*. Springer International Publishing, 2020, pp. 1089–1095. [Online]. Available: https://doi.org/10.1007/978-3-030-38077-9_126
- [197] N. Wagener, C.-A. Cheng, J. Sacks, and B. Boots, "An online learning approach to model predictive control," 2019.
- [198] M. Wang, Z. Wang, J. Talbot, J. C. Gerdes, and M. Schwager, "Game theoretic planning for self-driving cars in competitive scenarios," in *Robotics: Science and Systems XV, University of Freiburg, Freiburg im Breisgau, Germany, June 22-26, 2019*. A. Bicch, H. Kress-Gazit, and S. Hutchinson, Eds., 2019. [Online]. Available: <https://doi.org/10.15607/RSS.2019.XV.048>
- [199] Z. Wang, R. Spica, and M. Schwager, "Game Theoretic Motion Planning for Multi-robot Racing," in *Distributed Autonomous Robotic Systems*, vol. 9. Springer, 2020, pp. 225–238. [Online]. Available: http://link.springer.com/10.1007/978-3-030-05816-6_16
- [200] M. Wang, Z. Wang, J. Talbot, J. C. Gerdes, and M. Schwager, "Game-theoretic planning for self-driving cars in multivehicle competitive scenarios," *IEEE Transactions on Robotics*, pp. 1–13, 2021. [Online]. Available: <https://doi.org/10.1109/tro.2020.3047521>
- [201] T. Weiss and M. Behl, "DeepRacing: Parameterized trajectories for autonomous racing," 2020.
- [202] —, "DeepRacing: A framework for autonomous racing," in *2020 Design, Automation & Test in Europe Conference & Exhibition (DATE)*. IEEE, Mar. 2020. [Online]. Available: <https://doi.org/10.23919/date48585.2020.9116486>
- [203] G. Williams, P. Drews, B. Goldfain, J. M. Reh, and E. A. Theodorou, "Aggressive driving with model predictive path integral control," in *2016 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2016. [Online]. Available: <https://doi.org/10.1109/icra.2016.7487277>
- [204] G. Williams, B. Goldfain, P. Drews, J. M. Reh, and E. A. Theodorou, "Autonomous racing with autorally vehicles and differential games," 2017.
- [205] G. Williams, N. Wagener, B. Goldfain, P. Drews, J. M. Reh, B. Boots, and E. A. Theodorou, "Information theoretic MPC for model-based reinforcement learning," in *2017 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2017. [Online]. Available: <https://doi.org/10.1109/icra.2017.7989202>
- [206] G. Williams, B. Goldfain, P. Drews, J. M. Reh, and E. A. Theodorou, "Best response model predictive control for agile interactions between autonomous ground vehicles," in *2018 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, May 2018. [Online]. Available: <https://doi.org/10.1109/icra.2018.8462831>
- [207] G. Williams, P. Drews, B. Goldfain, J. M. Reh, and E. A. Theodorou, "Information-theoretic model predictive control: Theory and applications to autonomous driving," *IEEE Transactions on Robotics*, vol. 34, no. 6, pp. 1603–1622, Dec. 2018. [Online]. Available: <https://doi.org/10.1109/tro.2018.2865891>
- [208] G. Williams, B. Goldfain, P. Drews, K. Saigol, J. Reh, and E. Theodorou, "Robust sampling based model predictive control with sparse objective information," in *Robotics: Science and Systems XIV*. Robotics: Science and Systems Foundation, Jun. 2018. [Online]. Available: <https://doi.org/10.15607/rss.2018.xiv.042>
- [209] G. Williams, B. Goldfain, J. M. Reh, and E. A. Theodorou, "Locally weighted regression pseudo-rehearsal for online learning of vehicle dynamics," 2019.
- [210] A. Wischniewski, T. Stahl, J. Betz, and B. Lohmann, "Vehicle dynamics state estimation and localization for high performance race cars," *IFAC-PapersOnLine*, vol. 52, no. 8, pp. 154–161, 2019. [Online]. Available: <https://doi.org/10.1016/j.ifacol.2019.08.064>
- [211] A. Wischniewski, J. Betz, and B. Lohmann, "A model-free algorithm to safely approach the handling limit of an autonomous racecar," in *2019 IEEE International Conference on Connected Vehicles and Expo (ICCVE)*. IEEE, Nov. 2019. [Online]. Available: <https://doi.org/10.1109/iccve45908.2019.8965218>
- [212] —, "Real-time learning of non-gaussian uncertainty models for autonomous racing," in *2020 59th IEEE Conference on Decision and Control (CDC)*. IEEE, Dec. 2020. [Online]. Available: <https://doi.org/10.1109/cdc42340.2020.9304230>
- [213] A. Wischniewski, M. Euler, S. Gümüs, and B. Lohmann, "Tube model predictive control for an autonomous race car," *Vehicle System Dynamics*, pp. 1–23, Jun. 2021. [Online]. Available: <https://doi.org/10.1080/00423114.2021.1943461>
- [214] C. You and P. Tsiftas, "Vehicle modeling and parameter estimation using adaptive limited memory joint-state UKF," in *2017 American Control Conference (ACC)*. IEEE, May 2017. [Online]. Available: <https://doi.org/10.23919/acc.2017.7962973>
- [215] —, "Real-time trail-braking maneuver generation for off-road vehicle racing," in *2018 Annual American Control Conference (ACC)*. IEEE, Jun. 2018. [Online]. Available: <https://doi.org/10.23919/acc.2018.8431620>
- [216] —, "High-speed cornering for autonomous off-road rally racing," *IEEE Transactions on Control Systems Technology*, vol. 29, no. 2, pp. 485–501, Mar. 2021. [Online]. Available: <https://doi.org/10.1109/tcst.2019.2950354>
- [217] D. Zadok, T. Hirshberg, A. Biran, K. Radinsky, and A. Kapoor, "Explorations and lessons learned in building an autonomous formula SAE car from simulations," in *Proceedings of the 9th International Conference on Simulation and Modeling Methodologies, Technologies and Applications*. SCITEPRESS - Science and Technology Publications, 2019. [Online]. Available: <https://doi.org/10.5220/0008120604140421>
- [218] M. Zeillinger, R. Hauk, M. Bader, and A. Hofmann, "Design of an autonomous race car for the formula student driverless (fsd)," 2017. [Online]. Available: <https://openlib.tugraz.at/download.php?id=5aaa45931188a&location=medra>
- [219] V. Zhang, S. Thornton, and C. Gerdes, "Tire modeling to enable model predictive control of automated vehicles from standstill to the limits of handling," in *AVEC 18 -14th International Symposium on Advanced Vehicle Control*, 2018. [Online]. Available: https://ddl.stanford.edu/sites/g/files/sbiybj9456/f/Zhang_2018_avec.pdf
- [220] J. Zubaca, M. Stolz, and D. Watenig, "Extended hoo filter adaptation based on innovation sequence for advanced ego-vehicle motion estimation," in *2020 IEEE 3rd Connected and Automated Vehicles Symposium (CAVS)*. IEEE, Nov. 2020. [Online]. Available: <https://doi.org/10.1109/cavs51000.2020.9334568>
- [221] —, "Smooth reference line generation for a race track with gates based on defined borders," in *2020 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, Oct. 2020. [Online]. Available: <https://doi.org/10.1109/iv47402.2020.9304722>
- [222] I. Zubov, I. Afanasyev, A. Gabdullin, R. Mustafin, and I. Shimchik, "Autonomous drifting control in 3d car racing simulator," in *2018 International Conference on Intelligent Systems (IS)*. IEEE, Sep. 2018. [Online]. Available: <https://doi.org/10.1109/is.2018.8710588>
- [223] C. Jung, S. Lee, H. Seong, A. Finazzi, and D. H. Shim, "Game-theoretic model predictive control with data-driven identification of vehicle model for head-to-head autonomous racing," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper1.pdf
- [224] N. Li, E. Goubault, L. Pautet, and S. Putot, "Autonomous racecar control in head-to-head competition using mixed-integer quadratic programming," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Avail-

- able: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper2.pdf
- [225] M. Schratte, J. Zubaca, K. Mautner-Lassnig, T. Renzler, M. Kirchengast, S. Loigge, M. Stolz, and D. Watzel, "Lidar-based mapping and localization for autonomous racing," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper4.pdf
- [226] T. Weiss, J. Chrosniak, and M. Behl, "Towards multi-agent autonomous racing with the deepacing framework," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper5.pdf
- [227] M. Schmid, Q. Zhu, A. Boncimino, R. Prucka, and C. Paredis, "Control informed design of the iac autonomous racecar for operation at the dynamic envelope," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper6.pdf
- [228] X. Xiao, J. Biswas, and P. Stone, "Learning inverse kinodynamics for accurate high-speed off-road navigation on unstructured terrain," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper7.pdf
- [229] D. Kalaria, P. Maheshwari, A. Jha, A. Issar, D. Chakravarty, S. Anwar, and A. Tovar, "Local nmpe on global optimised path for autonomous racing," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper8.pdf
- [230] J. Bhargav, J. Betz, H. Zheng, and R. Mangharam, "Track based offline policy learning for overtaking maneuvers with autonomous racecars," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper9.pdf
- [231] S. Wadeka, B. Schwartz, A. Gamal, S. Kannan, M. Mar, R. Manna, V. Chellapandi, and D. Gonzalez, "Towards end-to-end deep learning for autonomous racing: On data collection and a unified architecture for steering and throttle prediction," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper10.pdf
- [232] T. Brüdigam, A. Capone, S. Hirche, D. Wollherr, and M. Leibold, "Gaussian process-based stochastic model predictive control for overtaking in autonomous racing," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper11.pdf
- [233] R. Wang, Y. Han, and U. Vaidya, "Deep koopman data-driven control framework for autonomous racing," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper12.pdf
- [234] M. Jiang, K. Miller, D. Sun, Z. Liu, Y. Jia, A. Datta, N. Ozay, and S. Mitra, "Continuous integration and testing for autonomous racing software: An experience report from graic," in *2021 International Conference on Robotics and Automation (ICRA 2021) - Workshop Opportunities and Challenges With Autonomous Racing*. IEEE, 2021. [Online]. Available: https://linklab-uva.github.io/icra-autonomous-racing/contributed_papers/paper13.pdf
- [235] S. D. Pendleton, H. Andersen, X. Du, X. Shen, M. Meghiani, Y. H. Eng, D. Rus, and M. H. Ang, "Perception, planning, control, and coordination for autonomous vehicles," *Machines*, vol. 5, no. 1, 2017. [Online]. Available: <https://www.mdpi.com/2075-1702/5/1/6>
- [236] W. Hess, D. Kohler, H. Rapp, and D. Andor, "Real-time loop closure in 2d lidar slam," in *2016 IEEE International Conference on Robotics and Automation (ICRA)*, 2016, pp. 1271–1278.

- [237] E. Espié, C. Guionneau, B. Wymann, C. Dimitrakakis, R. Coulom, and A. Sumner, "Torcs, the open racing car simulator," 2005.
- [238] R. Pütz and T. Serné, *Rennwagentechnik - Praxislehrgang Fahrdynamik*. Springer Fachmedien Wiesbaden, 2017. [Online]. Available: <https://doi.org/10.1007/978-3-658-16102-6>
- [239] A. Dosovitskiy, G. Ros, F. Codevilla, A. Lopez, and V. Koltun, "CARLA: An open urban driving simulator," in *Proceedings of the 1st Annual Conference on Robot Learning*, 2017, pp. 1–16.
- [240] G. Brockman, V. Cheung, L. Pettersson, J. Schneider, J. Schulman, J. Tang, and W. Zaremba, "Openai gym," *arXiv preprint arXiv:1606.01540*, 2016.
- [241] A. Domahidi and J. Jerez, "Forces professional," Embotech AG, url=<https://embotech.com/FORCES-Pro>, 2014–2019.
- [242] D. Ha and J. Schmidhuber, "World models," 2018.




Johannes Betz earned both a B. Eng. (2011) and a M. Sc. (2012) in the field of Automotive Engineering. After he did his PhD at the Technical University of Munich (TUM) he was Postdoctoral Researcher at the Institute of Automotive Technology at TUM where he founded the TUM Autonomous Motorsport Team. He is now a postdoctoral researcher at the University of Pennsylvania where he is working at the xLab for Safe Autonomous Systems. His research is focusing on a holistic software development for autonomous systems with extreme motions at the dynamic limits in extreme and unknown environments. By using modern algorithms from the field of artificial intelligence he is trying to develop new and advanced methods and intelligent algorithms. Based on his additional studies in philosophy he extends current path and behavior planners for autonomous systems with ethical theories



Hongrui Zheng received his B.S. degrees in Mechanical Engineering and Computer Science from Georgia Institute of Technology, and his M.S. degree in Robotics from University of Pennsylvania. He is currently a Ph.D. candidate at the University of Pennsylvania where he is working at the xLab for Safe Autonomous Systems. His research focuses on building the tools and theoretical foundations necessary to scale design, testing, and optimization of safe-autonomous systems.



Alexander Liniger received the B.Sc. and M.Sc. degrees in mechanical engineering from the Department of Mechanical and Process Engineering, ETH Zurich, Switzerland, in 2010 and 2013, respectively, and in May 2018 successfully defended his PhD degree at the Automatic Control Laboratory, ETH Zurich, Switzerland. Currently he is a Postdoctoral Researcher in the Computer Vision Lab, ETH Zurich, Switzerland, where he is part of Luc van Gool's group working in the Toyota TRACE project. During his PhD his main research interests include model predictive control, viability theory as well as game theory and their application to autonomous driving and racing. Currently, he is investigating how control theory and computer vision can be combined to achieve end-to-end learning approaches with formal guarantees.



Ugo Rosolia is a postdoctoral scholar at Caltech, working with Prof. Aaron Ames and Prof. Yisong Yue. His current research focuses on high-level planning in partially observable environments and on designing control algorithms that allow autonomous systems to perform highly dynamical maneuvers while guaranteeing safety. During his PhD at the University of California Berkeley, he worked with Prof. Francesco Borrelli in the MPC lab. He developed the Learning Model Predictive Control (LMPC) strategy, which is a model-based policy

iteration strategy. This strategy was used to teach an autonomous vehicle how to race.



Phillip Karle is currently a PhD student at the Technical University of Munich. He received both his B.Sc. degree in 2017 and his M.Sc. degree in 2019 from the Technical University of Munich (TUM), Munich, Germany, where he is currently working towards his Ph.D. in mechanical engineering at the Institute of Automotive Technology. His main research interests include data-mining, scenario understanding, motion prediction and related applications for autonomous driving with the focus on unstructured environments.



Madhur Behl is an assistant professor in the departments of Computer Science, and Systems and Information Engineering, and a member of the Cyber-Physical Systems Link Lab at the University of Virginia. He conducts research at the confluence of Machine Learning, Predictive Control, and Artificial Intelligence with applications in Cyber-Physical Systems, Autonomous Systems, Robotics, and Smart Cities. He received his Ph.D. (2015) and M.S. (2012), in Electrical and Systems Engineering, both from the University of Pennsylvania.



Venkat Krovi is the Michelin Endowed Chair of Vehicle Automation in the Departments of Automotive Engineering and Mechanical Engineering at Clemson University. He received his Ph.D. degree in Mechanical Engineering and Applied Mechanics from the University of Pennsylvania in 1998. The underlying theme of his research activities has been to take advantage of the “power of the many” (both autonomous-agents and humans) to extend the reach of human users in the dull, dirty, and dangerous environments. These efforts at analyzing and realizing

the potential of distributed-autonomy and human-robot synergy has unlocked new opportunities in wide ranging applications in plant-automation, consumer electronics, automobile, defense and healthcare/surgical simulation arenas.



Rahul Mangharam received his Ph.D. in Electrical and Computer Engineering from Carnegie Mellon University where he also received his MS and BS. He is an Associate Professor in the Department of Electrical and Systems Engineering at the University of Pennsylvania. He is a founding member of the PRECISE Center and directs the xLab for Safe Autonomous Systems Lab at Penn. His research is at the intersection of formal methods, machine learning and control for medical devices, energy efficient buildings, and autonomous systems.