

Adaptive, second-order, unconditionally stable partitioned method for fluid–structure interaction

Martina Bukač^{a,*}, Catalin Trenchea^b

^a Department of Applied and Computational Mathematics and Statistics, University of Notre Dame, Notre Dame, IN 46556, USA

^b Department of Mathematics, University of Pittsburgh, Pittsburgh, PA 15260, USA

Received 24 October 2021; received in revised form 2 March 2022; accepted 4 March 2022

Available online 23 March 2022

Abstract

We propose a novel, time adaptive, strongly-coupled partitioned method for the interaction between a viscous, incompressible fluid and a thin elastic structure. The time integration is based on the refactorized Cauchy's one-legged 'θ-like' method, which consists of a backward Euler method using a $\theta\tau_n$ -time step and a forward Euler method using a $(1-\theta)\tau_n$ -time step. The bulk of the computation is done by the backward Euler method, as the forward Euler step is equivalent to (and implemented as) a linear extrapolation. The variable τ_n -time step integration scheme is combined with the partitioned, kinematically coupled β -scheme, used to decouple the fluid and structure sub-problems. In the backward Euler step, the two sub-problems are solved in a partitioned sequential manner, and iterated until convergence. Then, the fluid and structure sub-problems are post-processed/extrapolated in the forward Euler step, and finally the τ_n -time step is adapted. The refactorized Cauchy's one-legged 'θ-like' method used in the development of the proposed method is equivalent to the midpoint rule when $\theta = \frac{1}{2}$, in which case the method is non-dissipative and second-order accurate. We prove that the sub-iterative process of our algorithm is linearly convergent, and that the method is unconditionally stable when $\theta \geq \frac{1}{2}$. The numerical examples explore the properties of the method when both fixed and variable time steps are used, and in both cases shown an excellent agreement with the reference solution.

© 2022 Elsevier B.V. All rights reserved.

Keywords: Time adaptivity; Fluid–structure interaction; Partitioned method; Second-order accuracy; Unconditional stability

1. Introduction

In realistic flow problems described by partial differential equations (PDEs), where the dynamics are not known, or in which the variables are changing rapidly, the robust, adaptive time-stepping is central to accurately and efficiently predict the long-term behavior of the solution. This is especially important in the coupled flow problems, such as the fluid–structure interaction (FSI), which often exhibit complex dynamic behavior. While the adaptive spatial mesh refinement techniques are well established and widely used, the adaptive time-stepping methods for PDEs are less mature, needing delicate synchronization steps which involve interpolation, extrapolation or projection. These operations can have adverse effects on the stability, and can destroy important geometric properties of the scheme (e.g. the conservation of invariants). Even in the case of the ordinary differential equations, most

* Corresponding author.

E-mail address: mbukac@nd.edu (M. Bukač).

linear multistep methods [1,2], when considered with variable time steps, do not preserve the zero-stability or A-stability properties of the constant time step versions. For example, the trapezoidal (Crank–Nicolson) method in the constant step case is A-stable but not B-stable [3]. However, the variable step version of the trapezoidal method is unstable [1,4–6]. Similarly, the second-order backward differentiation formula loses zero-stability and A-stability when used with a variable step size.

Recently, the midpoint rule was considered in an alternative, backward Euler (BE)-forward Euler (FE) formulation, and was proved to be B-stable when applied with a variable time step [7]. The same was shown for a θ -like generalization of the midpoint rule, referred to as the refactorized Cauchy's one-legged ' θ -like' method [7]. In this work, this method is applied together with a partitioning approach to approximate the solution of the interaction between an incompressible, viscous fluid and a thin elastic structure. To best of our knowledge, this is the first unconditionally stable, second-order accurate, adaptive, partitioned method for FSI problems.

Adaptive time-stepping methods for FSI problems have received limited attention in the literature, especially from the analytical perspective. A novel, adaptive time-stepping method for a monolithic FSI problem based on the a posteriori error estimation was proposed in [8]. The error of the fully implicit scheme is estimated with the help of an auxiliary explicit scheme. The proposed method is tested on several numerical examples. The authors in [9] considered a nonlinear FSI problem based on the arbitrary Lagrangian–Eulerian approach and solved the equations using an adaptive Fractional-Step-theta scheme method applied to the monolithic system. They based the time adaptivity process on a rigorous derivation of dual-weighted sensitivity measures and heuristic truncation-based time step control. In order to apply the dual-weighted residual method, a Galerkin interpretation of the Fractional-Step-theta scheme was considered. The proposed methodology was tested on several numerical examples. In [10], the interaction between a viscous fluid and a rigid body under turbulent flow was studied. The authors combined the large eddy simulation based on implicit turbulence modeling with time-space adaptive techniques in arbitrary Lagrangian–Eulerian framework. We also mention the work in [11,12] where a time-adaptive fluid–structure interaction method for thermal coupling is used to model the cooling processes in heat treatment of steel. In particular, the authors consider the surface coupling of the compressible Navier–Stokes equations bordering at one part of the surface with the heat equation in a solid region. The fluid and the heat equation are solved in parallel in a partitioned manner. The resulting method was empirically shown to be second-order accurate, which was used to implement a simple time step control.

While the methods listed above have been extensively numerically verified, they have not been analyzed numerically. Furthermore, in case of the interaction between an incompressible, viscous fluid and an elastic structure, only monolithic adaptive methods have been considered, while many different partitioned methods have been proposed when the time step is fixed [13–24].

In this work, we propose a novel, adaptive, partitioned algorithm for the interaction between an incompressible, viscous fluid and a thin, elastic structure. The time discretization in the proposed method is based on the refactorized Cauchy's one-legged ' θ -like' scheme [7], which is equivalent to the midpoint rule (and, therefore, second-order accurate) when $\theta = \frac{1}{2}$. This method is combined with a partitioned strategy, based on the kinematically coupled β -scheme [21,25], used to separate the fluid and structure sub-problems. However, since the straightforward application of both methods results in instabilities, in the proposed approach significant modifications are made in order to obtain unconditional stability. Unlike the kinematically coupled β -scheme, the proposed adaptive method is strongly coupled. The fluid and structure sub-problems are solved sequentially and iterated until convergence. Then, the converged solutions of the two sub-problems are post-processed using an extrapolation (equivalent to the FE scheme), and the time step is adapted. To adapt the time step, we use a local truncation error estimator based on the solution obtained using the Adams–Bashforth two-step (AB2) method. To discretize the problem in space, we use the finite element method. As commonly done in the literature in order to simplify numerical analysis, we assume that the fluid is modeled using the Stokes equations, that the structure displacement is infinitesimal and that the FSI problem is linear [17,25–27]. Using these assumptions, we prove that the sub-iterative process converges *linearly*, and that the proposed method is unconditionally energy bounded, hence stable, when $\theta \geq \frac{1}{2}$. An extension to moving domain FSI problems is discussed in Section 5.4.

We note that the proposed method is novel even when considered with a fixed time step, in which case it can be seen as a second-order extension (when $\theta = \frac{1}{2}$) of the kinematically coupled β -scheme. Hence, in the numerical examples we investigate the convergence rates of the proposed method when a fixed time step is used, as well as the accuracy properties of both fixed and variable time-stepping versions. The results are compared with the

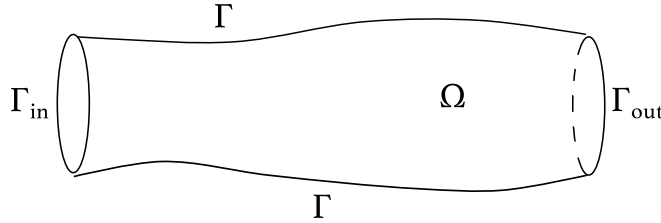


Fig. 1. Fluid domain Ω . The lateral boundary Γ represents an elastic structure.

kinematically coupled β -scheme, which has been shown to be first-order accurate when $\beta = 1$. Our computational study indicates an excellent agreement between the reference solution and the results obtained using the proposed method with both fixed and variable time steps, and provide an insight in the selection of parameters used in the adaptive process to exploit the benefits of time step adaptivity.

While our numerical simulations are based on the finite element method, other spatial discretization techniques can be considered. Furthermore, the refactorized Cauchy's one-legged ' θ -like' method with a variable time step can be applied to monolithic problems arising from other formulations. In particular, the time integration in [28,29] is similar to the time discretization of the monolithic system considered in this work. Hence, the proposed method could be combined with isogeometric analysis and space-time methods for FSI.

The rest of this paper is organized as follows. The FSI problem is outlined in Section 2. The numerical method, together with the convergence and stability analysis, is presented in Section 3. The computation of the local truncation error is shown in Section 4, and the numerical examples are presented in Section 5. Finally, the conclusions are drawn in Section 6.

2. Description of the problem

Let $\Omega \subset \mathbb{R}^d$, $d = 2, 3$ be an open, smooth set, occupied by an incompressible, viscous, Newtonian fluid, such that $\partial\Omega = \Gamma \cup \Gamma_{in} \cup \Gamma_{out}$, where Γ represents the elastic structure, Γ_{in} represents the inlet and Γ_{out} represents the outlet (see Fig. 1). We assume that the flow is laminar, that the structure undergoes infinitesimal displacements and that the fluid-structure interaction is linear. These are common assumptions in the analysis of partitioned schemes for FSI problems [17,25–27]. Extensions to the moving domain problems are discussed in Section 5.4.

We model the fluid using the time-dependent Stokes equations in a fixed domain Ω , given by

$$\rho_f \partial_t \mathbf{u} = \nabla \cdot \boldsymbol{\sigma}(\mathbf{u}, p) + \mathbf{f}_f \quad \text{in } \Omega \times (0, T), \quad (2.1a)$$

$$\nabla \cdot \mathbf{u} = 0 \quad \text{in } \Omega \times (0, T), \quad (2.1b)$$

$$\boldsymbol{\sigma}(\mathbf{u}, p) \mathbf{n} = -p_{in}(t) \mathbf{n} \quad \text{on } \Gamma_{in} \times (0, T), \quad (2.1c)$$

$$\boldsymbol{\sigma}(\mathbf{u}, p) \mathbf{n} = -p_{out}(t) \mathbf{n} \quad \text{on } \Gamma_{out} \times (0, T), \quad (2.1d)$$

$$\mathbf{u}(\cdot, 0) = \mathbf{u}^0 \quad \text{in } \Omega, \quad (2.1e)$$

where $\mathbf{u} = (u_i)_{i=1,\dots,d}$ is the fluid velocity, p is the fluid pressure, ρ_f is the fluid density and $\boldsymbol{\sigma}(\mathbf{u}, p) = -p\mathbf{I} + 2\mu\mathbf{D}(\mathbf{u})$ is the fluid stress tensor, where $\mathbf{D}(\mathbf{u}) = (\nabla\mathbf{u} + (\nabla\mathbf{u})^T)/2$ is the strain rate tensor and μ is the fluid viscosity. The volume forcing term acting on the fluid is denoted by $\mathbf{f}_f$. At the inlet and outlet boundaries, Neumann boundary conditions Eqs. (2.1c)–(2.1d) are prescribed, where $\mathbf{n}$ denotes the outward normal to the fluid domain boundary, and p_{in} and p_{out} are the prescribed inflow and outflow forces, respectively. Initially, the fluid is assumed to be at rest, as prescribed in (2.1e).

To describe the structure elastodynamics, we use a linearly elastic, lower-dimensional model, given by

$$\rho_s h \partial_{tt} \boldsymbol{\eta} + \mathcal{L}_s \boldsymbol{\eta} = \mathbf{f}_s \quad \text{on } \Gamma \times (0, T), \quad (2.2a)$$

$$\boldsymbol{\eta} = \mathbf{0} \quad \text{on } \partial\Gamma \times (0, T), \quad (2.2b)$$

$$\boldsymbol{\eta}(\cdot, 0) = \boldsymbol{\eta}^0, \quad \partial_t \boldsymbol{\eta}(\cdot, 0) = \boldsymbol{\eta}_v^0 \quad \text{on } \Gamma, \quad (2.2c)$$

where $\boldsymbol{\eta} = (\eta_i)_{i=1,\dots,d}$ denotes the displacement, ρ_s denotes the density, h denotes the structure thickness and $\mathbf{f}_s$ is a vector of surface density of the force applied to the structure. Operator $\mathcal{L}_s$ describes the structure's elastic behavior.

Specific choices of $\mathcal{L}_s$ are detailed in Section 5. We assume that the structure is pinned at the edges (2.2b) and initially at rest, with zero displacement from the initial configuration (2.2c).

We define an inner-product and a norm associated with the structure operator, given by

$$a_s(\boldsymbol{\eta}, \boldsymbol{\xi}) = \langle \mathcal{L}_s \boldsymbol{\eta}, \boldsymbol{\xi} \rangle, \quad \|\boldsymbol{\eta}\|_S^2 = a_s(\boldsymbol{\eta}, \boldsymbol{\eta}),$$

where $\langle \cdot, \cdot \rangle$ denotes the $H^{-1} \times H_0^1$ duality pairing. We assume that the operator $\mathcal{L}_s : D(\mathcal{L}_s) \subset H_0^1(\Gamma) \rightarrow H^{-1}(\Gamma)$ is a maximal monotone operator [30], such that a Poincaré type inequality holds

$$\|\boldsymbol{\eta}\|_{L^2(\Gamma)} \leq C_{P,S} \|\boldsymbol{\eta}\|_S,$$

and the norm $\|\cdot\|_S$ is equivalent to the $H^1(\Gamma)$ norm. One example of such operator is the one associated with the linearly elastic Koiter shell model used in [31].

To couple the fluid and the structure, we prescribe the kinematic and dynamic coupling conditions. The kinematic coupling condition (no-slip condition) enforces the continuity of velocities at the fluid–structure interface, given by

$$\mathbf{u} = \partial_t \boldsymbol{\eta} \quad \text{on } \Gamma \times (0, T). \quad (2.3)$$

The dynamic coupling condition enforces the conservation of momentum, given by

$$\mathbf{f}_s = -\boldsymbol{\sigma}(\mathbf{u}, p)\mathbf{n} \quad \text{on } \Gamma \times (0, T). \quad (2.4)$$

Eqs. (2.1a)–(2.4) define a linear fluid–structure interaction problem, which has a well-defined energy [20,25].

3. Numerical scheme

The proposed method is based on the kinematically coupled β -scheme proposed in [21,25], combined with the refactorized Cauchy’s one-legged ‘ θ -like’ method [7]. To present the main steps of the proposed method, we consider a general evolution equation given by

$$y'(t) = f(t, y(t)), \quad t \in (a, b].$$

To solve this problem numerically with an adaptive time step, we apply the Cauchy’s one-legged ‘ θ -like’ method [32], given as follows

$$\frac{y^{n+1} - y^n}{\tau^n} = f(t^{n+\theta_n}, y^{n+\theta_n}) \quad \text{for } \theta_n \in [0, 1], \quad (3.1)$$

where $\{t^n\}_{0 \leq n \leq N}$ are mesh points based on a variable time step τ^n such that $t^{n+1} = t^n + \tau^n$, and $t^{n+\theta_n} = t^n + \theta_n \tau^n$. Furthermore, y^n denotes the approximation of a time-dependent function y at time level t^n , and $y^{n+\theta_n} = \theta_n y^{n+1} + (1 - \theta_n) y^n$. We note that (3.1) differs from the classical linear multistep θ -method [33]. As shown in [7], problem (3.1) can be solved in a BE–FE fashion as

$$\text{BE:} \quad \frac{y^{n+\theta_n} - y^n}{\theta_n \tau_n} = f(t^{n+\theta_n}, y^{n+\theta_n}), \quad (3.2)$$

$$\text{FE:} \quad \frac{y^{n+1} - y^{n+\theta_n}}{(1 - \theta_n) \tau_n} = f(t^{n+\theta_n}, y^{n+\theta_n}). \quad (3.3)$$

Using the first equation in the second equation, the FE problem can also be written as a linear extrapolation (which acts as post-processing), given by

$$y^{n+1} = \frac{1}{\theta_n} y^{n+\theta_n} - \left(\frac{1}{\theta_n} - 1 \right) y^n.$$

We note that when $\theta = \frac{1}{2}$, problem (3.2)–(3.3) is equivalent to the midpoint rule [34–38], hence conserving all quadratic Hamiltonians (e.g., mass and energy) [39,40]. Therefore, in that case, (3.2)–(3.3) is an implicit, conservative, second-order B-stable time-stepping method. The scheme remains unconditionally B-stable for $\theta \in [\frac{1}{2}, 1]$. We note that the midpoint rule coincides with the trapezoidal rule when f is linear. However, the methods differ for nonlinear f , and hence exhibit different stability properties.

We start by rewriting the coupled FSI problem. Introducing the displacement velocity $\xi = \partial_t \eta$, the coupled problem can be reformulated in the following way: Find $\mathbf{u}$, p , η and ξ such that

$$\rho_f \partial_t \mathbf{u} = \nabla \cdot \boldsymbol{\sigma}(\mathbf{u}, p) \quad \text{in } \Omega \times (0, T), \quad (3.4a)$$

$$\nabla \cdot \mathbf{u} = 0 \quad \text{in } \Omega \times (0, T), \quad (3.4b)$$

$$\rho_s h \partial_t \xi + \mathcal{L}_s \eta = -\boldsymbol{\sigma}(\mathbf{u}, p) \mathbf{n} \quad \text{on } \Gamma \times (0, T), \quad (3.4c)$$

$$\mathbf{u} = \xi = \partial_t \eta \quad \text{on } \Gamma \times (0, T), \quad (3.4d)$$

with the boundary and initial conditions specified in the previous section. Following the approach in [21,25], we add and subtract the fluid stress in (3.4c). Those two terms will be evaluated at the previous time step when we discretize in time. Using the operator-splitting, we separate the structure equation in two parts. One part is used to approximate the structure elastodynamics, while the other part is used as a Robin boundary condition in the fluid problem. We note that this gives us different Robin conditions than the ones used in [15,16], in part because we do not introduce combination parameters. The partitioned method is then combined with the refactorized Cauchy's one-legged ' θ -like' method (3.2)–(3.3). The proposed numerical scheme is given as follows.

Algorithm 1. Let τ^n be the variable time step and $t^{n+\theta} = t^n + \theta_n \tau^n$, for any $\theta_n \in [\frac{1}{2}, 1]$, and for all $n \geq 0$. Given $\mathbf{u}^0$ in Ω , and $\eta^0, \xi^0 = \mathbf{u}|_\Gamma^0$ on Γ , we first need to compute $p^{\theta^0}, p^{1+\theta^1}, \mathbf{u}^1, \mathbf{u}^2$ in Ω , and $\eta^1, \eta^2, \xi^1, \xi^2$ on Γ with a second-order method. A monolithic method or one of the loosely coupled methods proposed in [20,22] could be used, among others. Then for all $n \geq 2$ compute the following:

STEP 1. Set the initial guesses as the linearly extrapolated values:

$$\eta_{(0)}^{n+\theta_n} = \left(1 + \frac{\theta_n \tau^n}{\tau^{n-1}}\right) \eta^n - \frac{\theta_n \tau^n}{\tau^{n-1}} \eta^{n-1},$$

and similarly for $\xi_{(0)}^{n+\theta_n}, \mathbf{u}_{(0)}^{n+\theta_n}$. The pressure initial guess is defined as

$$p_{(0)}^{n+\theta_n} = \frac{1 + \theta_n \tau^n + \tau^{n-1} - \theta_{n-2} \tau^{n-2}}{1 + \theta_{n-1} \tau^{n-1} - \theta_{n-2} \tau^{n-2}} p^{n-1+\theta_{n-1}} - \frac{(1 - \theta_{n-1}) \tau^{n-1} + \theta_n \tau^n}{1 + \theta_{n-1} \tau^{n-1} - \theta_{n-2} \tau^{n-2}} p^{n-2+\theta_{n-2}}.$$

For $\kappa \geq 0$, compute until convergence the **backward Euler** partitioned problem:

$$\text{Solid: } \begin{cases} \frac{\eta_{(\kappa+1)}^{n+\theta_n} - \eta^n}{\theta_n \tau^n} = \xi_{(\kappa+1)}^{n+\theta_n} & \text{on } \Gamma, \quad (a) \\ \rho_s h \frac{\xi_{(\kappa+1)}^{n+\theta_n} - \xi^n}{\theta_n \tau^n} + \mathcal{L}_s \eta_{(\kappa+1)}^{n+\theta_n} = -\boldsymbol{\sigma}(\mathbf{u}_{(\kappa)}^{n+\theta_n}, p_{(\kappa)}^{n+\theta_n}) \mathbf{n} & \text{on } \Gamma, \quad (b) \\ \eta_{(\kappa+1)}^{n+\theta_n} = 0 & \text{on } \partial \Gamma, \quad (c) \end{cases} \quad (3.5)$$

$$\text{Fluid: } \begin{cases} \rho_f \frac{\mathbf{u}_{(\kappa+1)}^{n+\theta_n} - \mathbf{u}^n}{\theta_n \tau^n} - \nabla \cdot \boldsymbol{\sigma}(\mathbf{u}_{(\kappa+1)}^{n+\theta_n}, p_{(\kappa+1)}^{n+\theta_n}) = \mathbf{f}_f(t^{n+\theta_n}) & \text{in } \Omega, \quad (a) \\ \nabla \cdot \mathbf{u}_{(\kappa+1)}^{n+\theta_n} = 0 & \text{in } \Omega, \quad (b) \\ \rho_s h \frac{\mathbf{u}_{(\kappa+1)}^{n+\theta_n} - \xi_{(\kappa+1)}^{n+\theta_n}}{\theta_n \tau^n} = -\boldsymbol{\sigma}(\mathbf{u}_{(\kappa+1)}^{n+\theta_n}, p_{(\kappa+1)}^{n+\theta_n}) \mathbf{n} + \boldsymbol{\sigma}(\mathbf{u}_{(\kappa)}^{n+\theta_n}, p_{(\kappa)}^{n+\theta_n}) \mathbf{n} & \text{on } \Gamma. \quad (c) \\ \boldsymbol{\sigma}(\mathbf{u}_{(\kappa+1)}^{n+\theta_n}, p_{(\kappa+1)}^{n+\theta_n}) \mathbf{n} = -p_{in}(t^{n+\theta_n}) \mathbf{n} & \text{on } \Gamma_{in}, \quad (d) \\ \boldsymbol{\sigma}(\mathbf{u}_{(\kappa+1)}^{n+\theta_n}, p_{(\kappa+1)}^{n+\theta_n}) \mathbf{n} = -p_{out}(t^{n+\theta_n}) \mathbf{n} & \text{on } \Gamma_{out}. \quad (e) \end{cases} \quad (3.6)$$

The converged solutions

$$\eta_{(\kappa)}^{n+\theta_n}, \xi_{(\kappa)}^{n+\theta_n}, \mathbf{u}_{(\kappa)}^{n+\theta_n}, p_{(\kappa)}^{n+\theta_n} \xrightarrow{\kappa \rightarrow \infty} \eta^{n+\theta_n}, \xi^{n+\theta_n}, \mathbf{u}^{n+\theta_n}, p^{n+\theta_n},$$

then satisfy the coupled system:

$$\text{Solid: } \begin{cases} \frac{\eta^{n+\theta_n} - \eta^n}{\theta_n \tau^n} = \xi^{n+\theta_n} & \text{on } \Gamma, \quad (\text{a}) \\ \rho_s h \frac{\xi^{n+\theta_n} - \xi^n}{\theta_n \tau^n} + \mathcal{L}_s \eta^{n+\theta_n} = -\sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} & \text{on } \Gamma, \quad (\text{b}) \\ \eta^{n+\theta_n} = 0 & \text{on } \partial \Gamma, \quad (\text{c}) \end{cases} \quad (3.7)$$

$$\text{Fluid: } \begin{cases} \rho_f \frac{\mathbf{u}^{n+\theta_n} - \mathbf{u}^n}{\theta_n \tau^n} - \nabla \cdot \sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) = \mathbf{f}_f(t^{n+\theta_n}) & \text{in } \Omega, \quad (\text{a}) \\ \nabla \cdot \mathbf{u}^{n+\theta_n} = 0 & \text{in } \Omega, \quad (\text{b}) \\ \mathbf{u}^{n+\theta_n} = \xi^{n+\theta_n} & \text{on } \Gamma, \quad (\text{c}) \\ \sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} = -p_{in}(t^{n+\theta_n}) \mathbf{n} & \text{on } \Gamma_{in}, \quad (\text{d}) \\ \sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} = -p_{out}(t^{n+\theta_n}) \mathbf{n} & \text{on } \Gamma_{out}. \quad (\text{e}) \end{cases} \quad (3.8)$$

STEP 2. Now evaluate the following (equivalent to solving **forward Euler** problems):

$$\text{Solid: } \begin{cases} \eta^{n+1} = \frac{1}{\theta_n} \eta^{n+\theta_n} - \frac{1-\theta_n}{\theta_n} \eta^n & \text{on } \Gamma, \quad (\text{a}) \\ \xi^{n+1} = \frac{1}{\theta_n} \xi^{n+\theta_n} - \frac{1-\theta_n}{\theta_n} \xi^n & \text{on } \Gamma, \quad (\text{b}) \end{cases} \quad (3.9)$$

$$\text{Fluid: } \begin{cases} \mathbf{u}^{n+1} = \frac{1}{\theta_n} \mathbf{u}^{n+\theta_n} - \frac{1-\theta_n}{\theta_n} \mathbf{u}^n & \text{in } \Omega. \end{cases} \quad (3.10)$$

STEP 3. Compute the local truncation error, $\hat{T}^{n+1}$ (for details, see Section 4), and given a tolerance, δ , and parameters r_{min}, r_{max} and s , adapt the time step:

$$\tau^{new} = \tau^n \min \left\{ r_{max}, \max \left\{ r_{min}, s \left(\frac{\delta}{\|\hat{T}^{n+1}\|} \right)^{\frac{1}{3}} \right\} \right\}. \quad (3.11)$$

If $\|\hat{T}^{n+1}\| \leq \delta$, set $\tau^{n+1} = \tau^{new}$, chose $\theta_{n+1} \in [\frac{1}{2}, 1]$, and evolve the time interval $t^{n+2} = t^{n+1} + \theta_{n+1} \tau^{n+1}$. Otherwise, set $\tau^n = \tau^{new}$ and go back to Step 1.

Remark 3.1. The formula used to adapt the time step is based on the elementary stepsize selection algorithm (cf. GARNIER, Mémorial de l'Artillerie Française, 1929) commonly used in locally adaptive time-stepping [37,41,42]:

$$\tau^{new} = \tau^n \left(\frac{\delta}{\|\hat{T}^{n+1}\|} \right)^{\frac{1}{3}}.$$

Numbers r_{min} and r_{max} in (3.11) are added so that the ratio of τ^{new} and τ^n stays between these values. This type of restriction guarantees the zero-stability of general one-leg variable step size methods (see e.g., [42–46]), and helps to keep the time step from changing too rapidly, which is especially important in stiff problems. The coefficient $s \in [\frac{1}{2}, 1)$ is a ‘safety’ parameter, routinely used to reduce the number of rejected time steps in the adaptive algorithm.

Remark 3.2. We note that for $\theta_n = 1/2 + \mathcal{O}(\tau^n)$ the method is second-order accurate.

Remark 3.3. We also note that the linear extrapolations in (3.9)–(3.10) can be written as forward Euler problems. While linear extrapolations are more desirable from the implementational point of view, in stability analysis we

will use their forward Euler formulation, given as follows

$$\text{Solid: } \begin{cases} \frac{\boldsymbol{\eta}^{n+1} - \boldsymbol{\eta}^{n+\theta_n}}{(1 - \theta_n)\tau^n} = \boldsymbol{\xi}^{n+\theta_n} & \text{on } \Gamma, \quad (\text{a}) \\ \rho_s h \frac{\boldsymbol{\xi}^{n+1} - \boldsymbol{\xi}^{n+\theta_n}}{(1 - \theta_n)\tau^n} + \mathcal{L}_s \boldsymbol{\eta}^{n+\theta_n} = -\boldsymbol{\sigma}(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} & \text{in } \Gamma, \quad (\text{b}) \end{cases} \quad (3.12)$$

$$\text{Fluid: } \begin{cases} \rho_f \frac{\mathbf{u}^{n+1} - \mathbf{u}^{n+\theta_n}}{(1 - \theta_n)\tau^n} - \nabla \cdot \boldsymbol{\sigma}(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) = \mathbf{f}_F(t^{n+\theta_n}). & \text{in } \Omega. \quad (\text{a}) \end{cases} \quad (3.13)$$

Remark 3.4. While this method is based on the kinematically coupled β -scheme, there are still significant differences between the two methods. The kinematically coupled β scheme is a loosely-coupled method, and hence no subiterations are used between the fluid and the structure problems. As such, the method is unconditionally stable and first-order accurate when $\beta = 1$. To achieve the second-order accuracy, adding the linear extrapolation steps (3.9)–(3.10) directly to the kinematically coupled β -scheme would not produce a stable method. This is due to the splitting between the fluid and structure problems. Hence, in the proposed work, the fluid and structure problems are iteratively solved. Moreover, in the kinematically coupled β scheme, the solid problem contains the fluid velocity from the previous time step in the inertial term, which is not present in Algorithm 1.

3.1. Convergence of the partitioned iterative scheme

In the following, we will use the polarized identity, given by

$$2(a - c)b = a^2 - c^2 - (a - b)^2 + (b - c)^2. \quad (3.14)$$

Theorem 1. The sequences $\mathbf{u}_{(\kappa)}^{n+\theta_n}, \boldsymbol{\eta}_{(\kappa)}^{n+\theta_n}, \boldsymbol{\xi}_{(\kappa)}^{n+\theta_n}$ generated by iterations (3.5)–(3.6) converge as $\kappa \rightarrow \infty$:

$$\begin{aligned} \mathbf{u}_{(\kappa)}^{n+\theta_n} &\longrightarrow \mathbf{u}^{n+\theta_n} & \text{in } H^1(\Omega) \cap L^2(\Gamma), \\ \boldsymbol{\eta}_{(\kappa)}^{n+\theta_n} &\longrightarrow \boldsymbol{\eta}^{n+\theta_n} & \text{in } H^1(\Gamma), \quad \boldsymbol{\xi}_{(\kappa)}^{n+\theta_n} \longrightarrow \boldsymbol{\xi}^{n+\theta_n} & \text{in } L^2(\Gamma). \end{aligned}$$

Proof. We begin by subtracting (3.5)–(3.6) from Eqs. (3.7)–(3.8). Using notation

$$\begin{aligned} \delta_{\kappa+1}^\eta &= \boldsymbol{\eta}^{n+\theta_n} - \boldsymbol{\eta}_{(\kappa+1)}^{n+\theta_n}, & \delta_{\kappa+1}^\xi &= \boldsymbol{\xi}^{n+\theta_n} - \boldsymbol{\xi}_{(\kappa+1)}^{n+\theta_n}, \\ \delta_{\kappa+1}^u &= \mathbf{u}^{n+\theta_n} - \mathbf{u}_{(\kappa+1)}^{n+\theta_n}, & \delta_{\kappa+1}^p &= p^{n+\theta_n} - p_{(\kappa+1)}^{n+\theta_n}, \end{aligned}$$

we obtain the following:

$$\text{Solid: } \begin{cases} \frac{\delta_{\kappa+1}^\eta}{\theta_n \tau^n} = \delta_{\kappa+1}^\xi & \text{on } \Gamma, \quad (\text{a}) \\ \rho_s h \frac{\delta_{\kappa+1}^\xi}{\theta_n \tau^n} + \mathcal{L}_s (\delta_{\kappa+1}^\eta) = -\boldsymbol{\sigma}(\delta_{\kappa+1}^u, p_{(\kappa+1)}^{n+\theta_n}) \mathbf{n} & \text{on } \Gamma, \quad (\text{b}) \end{cases} \quad (3.15)$$

$$\text{Fluid: } \begin{cases} \rho_f \frac{\delta_{\kappa+1}^u}{\theta_n \tau^n} - \nabla \cdot \boldsymbol{\sigma}(\delta_{\kappa+1}^u, \delta_{\kappa+1}^p) = 0 & \text{in } \Omega, \quad (\text{a}) \\ \nabla \cdot \delta_{\kappa+1}^u = 0 & \text{in } \Omega, \quad (\text{b}) \\ \rho_s h \frac{\delta_{\kappa+1}^u - \delta_{\kappa+1}^\xi}{\theta_n \tau^n} = \boldsymbol{\sigma}(\delta_{\kappa+1}^u, \delta_{\kappa+1}^p) \mathbf{n} - \boldsymbol{\sigma}(\delta_{\kappa+1}^u, \delta_{\kappa+1}^p) \mathbf{n} & \text{on } \Gamma. \quad (\text{c}) \end{cases} \quad (3.16)$$

We note that in this case, the structure equations (3.15) are complemented with homogeneous Dirichlet boundary conditions (2.2b), and the fluid equations (3.16) are complemented with the homogeneous Neumann boundary conditions. We multiply (3.15)(a) by $\mathcal{L}_s(\delta_{\kappa+1}^\eta)$ and (3.15)(b) by $\delta_{\kappa+1}^\xi$, integrate over Γ , and add to obtain

$$0 = \frac{1}{\theta_n \tau^n} \|\delta_{\kappa+1}^\eta\|_S^2 + \frac{\rho_s h}{\theta_n \tau^n} \|\delta_{\kappa+1}^\xi\|_{L^2(\Gamma)}^2 + \int_\Gamma \boldsymbol{\sigma}(\delta_{\kappa+1}^u, \delta_{\kappa+1}^p) \mathbf{n} \cdot \delta_{\kappa+1}^\xi.$$

For the fluid part, we multiply (3.16)(a) by $\delta_{\kappa+1}^u$ and (3.16)(b) by $\delta_{\kappa+1}^p$. Integrating over Ω , and using (3.16)(c) and the polarized identity (3.14), we obtain

$$0 = \frac{\rho_f}{\theta_n \tau^n} \|\delta_{\kappa+1}^u\|_{L^2(\Omega)}^2 + 2\mu \|\mathbf{D}(\delta_{\kappa+1}^u)\|_{L^2(\Omega)}^2 + \frac{\rho_s h}{2\theta_n \tau^n} \left(\|\delta_{\kappa+1}^u\|_{L^2(\Gamma)}^2 - \|\delta_{\kappa+1}^\xi\|_{L^2(\Gamma)}^2 \right) \\ + \frac{\rho_s h}{2\theta_n \tau^n} \|\delta_{\kappa+1}^u - \delta_{\kappa+1}^\xi\|_{L^2(\Gamma)}^2 - \int_{\Gamma} \boldsymbol{\sigma}(\delta_{\kappa}^u, \delta_{\kappa}^p) \mathbf{n} \cdot \delta_{\kappa+1}^u.$$

Therefore, the structure and fluid estimates combine to give

$$0 = \frac{1}{\theta_n \tau^n} \|\delta_{\kappa+1}^\eta\|_S^2 + \frac{\rho_f}{\theta_n \tau^n} \|\delta_{\kappa+1}^u\|_{L^2(\Omega)}^2 + 2\mu \|\mathbf{D}(\delta_{\kappa+1}^u)\|_{L^2(\Omega)}^2 + \frac{\rho_s h}{2\theta_n \tau^n} \left(\|\delta_{\kappa+1}^u\|_{L^2(\Gamma)}^2 + \|\delta_{\kappa+1}^\xi\|_{L^2(\Gamma)}^2 \right) \\ + \frac{\rho_s h}{2\theta_n \tau^n} \|\delta_{\kappa+1}^u - \delta_{\kappa+1}^\xi\|_{L^2(\Gamma)}^2 + \int_{\Gamma} \boldsymbol{\sigma}(\delta_{\kappa}^u, \delta_{\kappa}^p) \mathbf{n} \cdot (\delta_{\kappa+1}^\xi - \delta_{\kappa+1}^u).$$

Using again the boundary condition (3.16)(c) and the polarized identity (3.14), we have that

$$\int_{\Gamma} \boldsymbol{\sigma}(\delta_{\kappa}^u, \delta_{\kappa}^p) \mathbf{n} \cdot (\delta_{\kappa+1}^\xi - \delta_{\kappa+1}^u) \\ = \frac{\theta_n \tau^n}{2\rho_s h} \left(\|\boldsymbol{\sigma}(\delta_{\kappa+1}^u, \delta_{\kappa+1}^p) \mathbf{n}\|_{L^2(\Gamma)}^2 - \|\boldsymbol{\sigma}(\delta_{\kappa}^u, \delta_{\kappa}^p) \mathbf{n}\|_{L^2(\Gamma)}^2 \right) - \frac{\rho_s h}{2\theta_n \tau^n} \|\delta_{\kappa+1}^\xi - \delta_{\kappa+1}^u\|_{L^2(\Gamma)}^2,$$

and therefore,

$$0 = \frac{1}{\theta_n \tau^n} \|\delta_{\kappa+1}^\eta\|_S^2 + \frac{\rho_f}{\theta_n \tau^n} \|\delta_{\kappa+1}^u\|_{L^2(\Omega)}^2 + 2\mu \|\mathbf{D}(\delta_{\kappa+1}^u)\|_{L^2(\Omega)}^2 + \frac{\rho_s h}{2\theta_n \tau^n} \left(\|\delta_{\kappa+1}^u\|_{L^2(\Gamma)}^2 + \|\delta_{\kappa+1}^\xi\|_{L^2(\Gamma)}^2 \right) \\ + \frac{\theta_n \tau^n}{2\rho_s h} \left(\|\boldsymbol{\sigma}(\delta_{\kappa+1}^u, \delta_{\kappa+1}^p) \mathbf{n}\|_{L^2(\Gamma)}^2 - \|\boldsymbol{\sigma}(\delta_{\kappa}^u, \delta_{\kappa}^p) \mathbf{n}\|_{L^2(\Gamma)}^2 \right).$$

Equivalently this can be written as

$$\|\delta_{\kappa+1}^\eta\|_S^2 + \rho_f \|\delta_{\kappa+1}^u\|_{L^2(\Omega)}^2 + 2\mu \theta_n \tau^n \|\mathbf{D}(\delta_{\kappa+1}^u)\|_{L^2(\Omega)}^2 + \frac{\rho_s h}{2} \left(\|\delta_{\kappa+1}^u\|_{L^2(\Gamma)}^2 + \|\delta_{\kappa+1}^\xi\|_{L^2(\Gamma)}^2 \right) \\ + \frac{|\theta_n \tau^n|^2}{2\rho_s h} \|\boldsymbol{\sigma}(\delta_{\kappa+1}^u, \delta_{\kappa+1}^p) \mathbf{n}\|_{L^2(\Gamma)}^2 = \frac{|\theta_n \tau^n|^2}{2\rho_s h} \|\boldsymbol{\sigma}(\delta_{\kappa}^u, \delta_{\kappa}^p) \mathbf{n}\|_{L^2(\Gamma)}^2, \quad (3.17)$$

which yields that, as $\kappa \nearrow \infty$, the sequences of iterations $\mathbf{u}_{(\kappa)}^{n+\theta_n}$, $\boldsymbol{\eta}_{(\kappa)}^{n+\theta_n}$, $\boldsymbol{\xi}_{(\kappa)}^{n+\theta_n}$ converge linearly to $\mathbf{u}^{n+\theta_n}$, $\boldsymbol{\eta}^{n+\theta_n}$, $\boldsymbol{\xi}^{n+\theta_n}$, respectively, in the strong topologies of $H^1(\Omega) \cap L^2(\Gamma)$, $H^1(\Gamma)$ and $L^2(\Gamma)$. $\square$

Remark 3.5. By multiplying (3.17) through by $\rho_s h / |\theta_n \tau^n|^2$, we can observe that the convergence slows down as ρ_s or h decrease, and speeds up if $\rho_f \ll \rho_s$. Furthermore, the speed of convergence can be improved by decreasing the time step. These observations agree with our numerical results presented in Section 5.

3.2. Stability-energy estimates

Denote by $\mathcal{E}^N$ is the sum of the elastic energy of the structure, kinetic energy of the structure and kinetic energy of the fluid

$$\mathcal{E}^N = \frac{1}{2} \|\boldsymbol{\eta}^N\|_S^2 + \frac{\rho_s h}{2} \|\boldsymbol{\xi}^N\|_{L^2(\Gamma)}^2 + \frac{\rho_f}{2} \|\mathbf{u}^N\|_{L^2(\Omega)}^2,$$

and by $\mathcal{D}^N$ the fluid viscous dissipation

$$\mathcal{D}^N = 2\mu \sum_{n=2}^{N-1} \tau^n \|\mathbf{D}(\mathbf{u}^{n+\theta_n})\|_{L^2(\Omega)}^2.$$

The stability of the scheme presented in Algorithm 1 is given in the following theorem.

Theorem 2. Let $\{(\boldsymbol{\xi}^n, \boldsymbol{\eta}^n, \mathbf{u}^n, p^n)\}_{2 \leq n \leq N}$ be the solution of Algorithm 1, assuming that the system is isolated, i.e., $\mathbf{f}_f = 0$, $p_{in} = 0$ and $p_{out} = 0$. Then, for $\theta_n \geq \frac{1}{2}$, the method is unconditionally energy stable, and the following

a priori energy equality holds

$$\mathcal{E}^N + \mathcal{D}^N + \mathcal{N}^N = \mathcal{E}^2,$$

where $\mathcal{N}^N$ denotes the numerical dissipation

$$\begin{aligned} \mathcal{N}^N = & \sum_{n=2}^{N-1} \frac{(\tau^n)^2(2\theta_n - 1)}{2} \|\xi^{n+\theta_n}\|_S^2 + \frac{\rho_s h}{2} \sum_{n=2}^{N-1} (2\theta_n - 1) \|\xi^{n+1} - \xi^n\|_{L^2(\Gamma)}^2 \\ & + \frac{\rho_f}{2} \sum_{n=2}^{N-1} (2\theta_n - 1) \|\mathbf{u}^{n+1} - \mathbf{u}^n\|_{L^2(\Omega)}^2. \end{aligned}$$

Proof. We multiply (3.7)(a) by $\theta_n \mathcal{L}_s \eta^{n+\theta_n}$ and (3.7)(b) by $\theta_n \xi^{n+\theta_n}$, integrate over Γ , add and apply (3.14) to obtain

$$\begin{aligned} 0 = & \frac{1}{2\tau^n} \left(\|\eta^{n+\theta_n}\|_S^2 - \|\eta^n\|_S^2 + \|\eta^{n+\theta_n} - \eta^n\|_S^2 \right) \\ & + \frac{\rho_s h}{2\tau^n} \left(\|\xi^{n+\theta_n}\|_{L^2(\Gamma)}^2 - \|\xi^n\|_{L^2(\Gamma)}^2 + \|\xi^{n+\theta_n} - \xi^n\|_{L^2(\Gamma)}^2 \right) + \theta_n \int_{\Gamma} \sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} \cdot \xi^{n+\theta_n}. \end{aligned}$$

Similarly, multiplying (3.12)(a) by $(1 - \theta_n) \mathcal{L}_s \eta^{n+\theta_n}$ and (3.12)(b) by $(1 - \theta_n) \xi^{n+\theta_n}$, we derive

$$\begin{aligned} 0 = & \frac{1}{2\tau^n} \left(\|\eta^{n+1}\|_S^2 - \|\eta^{n+\theta_n}\|_S^2 - \|\eta^{n+1} - \eta^{n+\theta_n}\|_S^2 \right) \\ & + \frac{\rho_s h}{2\tau^n} \left(\|\xi^{n+1}\|_{L^2(\Gamma)}^2 - \|\xi^{n+\theta_n}\|_{L^2(\Gamma)}^2 - \|\xi^{n+1} - \xi^{n+\theta_n}\|_{L^2(\Gamma)}^2 \right) \\ & + (1 - \theta_n) \int_{\Gamma} \sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} \cdot \xi^{n+\theta_n}. \end{aligned}$$

Hence, from the structure part, we have

$$\begin{aligned} 0 = & \frac{1}{2\tau^n} \left(\|\eta^{n+1}\|_S^2 - \|\eta^n\|_S^2 - \|\eta^{n+1} - \eta^{n+\theta_n}\|_S^2 + \|\eta^{n+\theta_n} - \eta^n\|_S^2 \right) \\ & + \frac{\rho_s h}{2\tau^n} \left(\|\xi^{n+1}\|_{L^2(\Gamma)}^2 - \|\xi^n\|_{L^2(\Gamma)}^2 - \|\xi^{n+1} - \xi^{n+\theta_n}\|_{L^2(\Gamma)}^2 + \|\xi^{n+\theta_n} - \xi^n\|_{L^2(\Gamma)}^2 \right) \\ & + \int_{\Gamma} \sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} \cdot \xi^{n+\theta_n}. \end{aligned}$$

Using again the displacement equations (3.12)(a) and (3.7)(a), we have

$$-\|\eta^{n+1} - \eta^{n+\theta_n}\|_S^2 + \|\eta^{n+\theta_n} - \eta^n\|_S^2 = (\tau^n)^2(2\theta_n - 1) \|\xi^{n+\theta_n}\|_S^2,$$

while the velocity equation (3.9)(b) yields

$$-\|\xi^{n+1} - \xi^{n+\theta_n}\|_{L^2(\Gamma)}^2 + \|\xi^{n+\theta_n} - \xi^n\|_{L^2(\Gamma)}^2 = (2\theta_n - 1) \|\xi^{n+1} - \xi^n\|_{L^2(\Gamma)}^2.$$

Hence the energy estimate of the structure part gives

$$\begin{aligned} 0 = & \frac{1}{2\tau^n} \left(\|\eta^{n+1}\|_S^2 - \|\eta^n\|_S^2 \right) + \frac{\rho_s h}{2\tau^n} \left(\|\xi^{n+1}\|_{L^2(\Gamma)}^2 - \|\xi^n\|_{L^2(\Gamma)}^2 \right) + \frac{\tau^n(2\theta_n - 1)}{2} \|\xi^{n+\theta_n}\|_S^2 \\ & + \frac{\rho_s h(2\theta_n - 1)}{2\tau^n} \|\xi^{n+1} - \xi^n\|_{L^2(\Gamma)}^2 + \int_{\Gamma} \sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} \cdot \xi^{n+\theta_n}. \end{aligned} \quad (3.18)$$

For the fluid part, we multiply (3.8)(a) by $\theta_n \mathbf{u}^{n+\theta_n}$ and (3.8)(b) by $\theta_n p^{n+\frac{1}{2}}$. Integrating over Ω , adding, and using (3.8)(c) and the homogeneous Neumann boundary conditions, we obtain

$$\begin{aligned} 0 = & \frac{\rho_f}{2\tau^n} \left(\|\mathbf{u}^{n+1}\|_{L^2(\Omega)}^2 - \|\mathbf{u}^n\|_{L^2(\Omega)}^2 - \|\mathbf{u}^{n+1} - \mathbf{u}^{n+\theta_n}\|_{L^2(\Omega)}^2 + \|\mathbf{u}^{n+\theta_n} - \mathbf{u}^n\|_{L^2(\Omega)}^2 \right) \\ & + 2\mu \|\mathbf{D}(\mathbf{u}^{n+\theta_n})\|_{L^2(\Omega)}^2 - \int_{\Gamma} \sigma(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} \cdot \xi^{n+\theta_n}. \end{aligned}$$

Taking into account the flow equation (3.10), we have

$$-\|\mathbf{u}^{n+1} - \mathbf{u}^{n+\theta_n}\|_{L^2(\Omega)}^2 + \|\mathbf{u}^{n+\theta_n} - \mathbf{u}^n\|_{L^2(\Omega)}^2 = (2\theta_n - 1)\|\mathbf{u}^{n+1} - \mathbf{u}^n\|_{L^2(\Omega)}^2.$$

Hence, the fluid part of the energy estimates gives

$$\begin{aligned} 0 &= \frac{\rho_f}{2\tau^n} (\|\mathbf{u}^{n+1}\|_{L^2(\Omega)}^2 - \|\mathbf{u}^n\|_{L^2(\Omega)}^2) + \frac{\rho_f(2\theta_n - 1)}{2\tau^n} \|\mathbf{u}^{n+1} - \mathbf{u}^n\|_{L^2(\Omega)}^2 + 2\mu \|\mathbf{D}(\mathbf{u}^{n+\theta_n})\|_{L^2(\Omega)}^2 \\ &\quad - \int_{\Gamma} \boldsymbol{\sigma}(\mathbf{u}^{n+\theta_n}, p^{n+\theta_n}) \mathbf{n} \cdot \boldsymbol{\xi}^{n+\theta_n}. \end{aligned} \quad (3.19)$$

The structure (3.18) and fluid (3.19) estimates combine to give

$$\begin{aligned} 0 &= \frac{1}{2\tau^n} (\|\boldsymbol{\eta}^{n+1}\|_S^2 - \|\boldsymbol{\eta}^n\|_S^2) + \frac{\rho_s h}{2\tau^n} (\|\boldsymbol{\xi}^{n+1}\|_{L^2(\Gamma)}^2 - \|\boldsymbol{\xi}^n\|_{L^2(\Gamma)}^2) + \frac{\tau^n(2\theta_n - 1)}{2} \|\boldsymbol{\xi}^{n+\theta_n}\|_S^2 \\ &\quad + \frac{\rho_s h(2\theta_n - 1)}{2\tau^n} \|\boldsymbol{\xi}^{n+1} - \boldsymbol{\xi}^n\|_{L^2(\Gamma)}^2 + \frac{\rho_f}{2\tau^n} (\|\mathbf{u}^{n+1}\|_{L^2(\Omega)}^2 - \|\mathbf{u}^n\|_{L^2(\Omega)}^2) \\ &\quad + \frac{\rho_f(2\theta_n - 1)}{2\tau^n} \|\mathbf{u}^{n+1} - \mathbf{u}^n\|_{L^2(\Omega)}^2 + 2\mu \|\mathbf{D}(\mathbf{u}^{n+\theta_n})\|_{L^2(\Omega)}^2. \end{aligned} \quad (3.20)$$

Summation from $n = 2$ to $N - 1$ and multiplication by τ^n yields the desired estimate. $\square$

Remark 3.6. We note that when $\theta_n = \frac{1}{2}$, for all n , we have $\mathcal{N}^N = 0$, and the method is conservative.

Corollary 1. Let $\{(\boldsymbol{\xi}^n, \boldsymbol{\eta}^n, \mathbf{u}^n, p^n)\}_{2 \leq n \leq N}$ be the solution of Algorithm 1, assuming non-zero volume and boundary forcing. Then, for $\theta_n \geq \frac{1}{2}$, the method is unconditionally energy stable, and the following a priori energy inequality holds

$$\mathcal{E}^N + \frac{1}{2}\mathcal{D}^N + \mathcal{N}^N \leq \mathcal{E}^2 + \mathcal{F}^N,$$

where $\mathcal{F}^N$ denotes the forcing terms

$$\mathcal{F}^N = \frac{C_1}{\mu} \|\mathbf{f}_f(t^{n+\theta_n})\|_{L^2(\Omega)}^2 + \frac{C_2}{\mu} \|p_{in}(t^{n+\theta_n})\|_{L^2(\Gamma_{in})}^2 + \frac{C_2}{\mu} \|p_{out}(t^{n+\theta_n})\|_{L^2(\Gamma_{out})}^2.$$

Proof. The main steps of the proof are the same as in Theorem 2. We estimate the additional terms due to non-zero volume and boundary forcing as follows. Using the Cauchy–Schwarz, trace, Poincaré and Korn inequalities [31], we have

$$\begin{aligned} &\int_{\Omega} \mathbf{f}_f(t^{n+\theta_n}) \cdot \mathbf{u}^{n+\theta_n} - \int_{\Gamma_{in}} p_{in}(t^{n+\theta_n}) \mathbf{u}^{n+\theta_n} \cdot \mathbf{n} - \int_{\Gamma_{out}} p_{out}(t^{n+\theta_n}) \mathbf{u}^{n+\theta_n} \cdot \mathbf{n} \\ &\leq \frac{C_1}{\mu} \|\mathbf{f}_f(t^{n+\theta_n})\|_{L^2(\Omega)}^2 + \frac{C_2}{\mu} \|p_{in}(t^{n+\theta_n})\|_{L^2(\Gamma_{in})}^2 + \frac{C_2}{\mu} \|p_{out}(t^{n+\theta_n})\|_{L^2(\Gamma_{out})}^2 \\ &\quad + \mu \|\mathbf{D}(\mathbf{u}^{n+\theta_n})\|_{L^2(\Omega)}^2. \end{aligned} \quad (3.21)$$

Combining (3.21) with (3.20), summing from $n = 2$ to $N - 1$ and multiplying by τ^n proves the Corollary. $\square$

4. Computing the local truncation error

The time step adaptivity can be implemented in numerous ways (see e.g. [47]). In this work, we compute the local truncation error using the Milne's device [48–50], i.e., the difference between the second-order midpoint solution, denoted by $y_{midpoint}^{n+1}$, and a second-order approximation given by a formula similar to the explicit Adams–Bashforth two-step (AB2) method, denoted by y_{AB2}^{n+1} . The difference between this method and the classical AB2 formula is that the function values are evaluated at half-times, as described in [7]. The solution obtained using the AB2 method is computed as

$$y_{AB2}^{n+1} = y^n \frac{(\tau^n + \tau^{n-1})(\tau^n + \tau^{n-1} + \tau^{n-2})}{\tau^{n-1}(\tau^{n-1} + \tau^{n-2})} - y^{n-1} \frac{\tau^n(\tau^n + \tau^{n-1} + \tau^{n-2})}{\tau^{n-1}\tau^{n-2}} + y^{n-2} \frac{\tau^n(\tau^n + \tau^{n-1})}{\tau^{n-2}(\tau^{n-1} + \tau^{n-2})}.$$

The local truncation error for the AB2 method, under localization assumption [47,51], can be written as

$$T_{AB2}^{n+1} = (\tau^n)^3 y'''(t^{n+\frac{1}{2}}) \mathcal{R}^n, \quad \text{where} \quad \mathcal{R}^n = \frac{1}{24} + \frac{1}{8} \left(1 + \frac{\tau^{n-1}}{\tau^n}\right) \left(1 + 2 \frac{\tau^{n-1}}{\tau^n} + \frac{\tau^{n-2}}{\tau^n}\right). \quad (4.1)$$

The local truncation error for the midpoint method, as well as the ‘ θ -like’ method for $\theta_n = \frac{1}{2} + \frac{1}{2}(\tau^n)^2$, is given by

$$\hat{T}^{n+1} = \frac{1}{24}(\tau^n)^3 y'''(t^{n+\frac{1}{2}}) + \mathcal{O}((\tau^n)^5).$$

Using (4.1), the local truncation error of the midpoint method can be written as

$$\hat{T}^{n+1} = \left(y_{midpoint}^{n+1} - y_{AB2}^{n+1}\right) \frac{1}{1 - 1/(24\mathcal{R}^n)}. \quad (4.2)$$

This relation will be used to compute the local truncation error in Step 3 of Algorithm 1.

5. Numerical examples

For the spatial discretization of Algorithm 1, we use the finite element method with uniform, conforming meshes. The problem is implemented in the finite element solver FreeFem++ [52]. We investigate the performance of the proposed method in four numerical examples. In the first example, we study the convergence rates of Algorithm 1 when used with a fixed time step on a benchmark problem based on the method of manufactured solutions. We also compare the average number of iterations in the sub-iterative process needed by Algorithm 1 and two other strongly-coupled schemes commonly used in the literature. In the second example, the adaptive time-stepping is applied on the same benchmark problem. In the third example we consider a benchmark problem describing pressure propagation in a two-dimensional channel commonly used to test FSI solvers, and compare different fixed and the variable time-stepping approaches. Finally, in the fourth example, we consider a moving domain, lid driven cavity with a flexible bottom, and present an extension of Algorithm 1 to moving domain FSI problems.

5.1. Example 1

In this example, we assume that the time step is fixed, and study the convergence rates of Algorithm 1. For this purpose, we use the method of manufactured solution. The fluid domain is defined as $\Omega = (-0.5, 0.5) \times (0, 1)$, and $\Gamma = (-0.5, 0.5) \times \{1\}$ represent the structure domain.

We model the structure using a thin wall model defined on Γ , which is based on the elastic Koiter shell model [21], where the 4th order derivative is neglected. The model accounts for both tangential (horizontal) and transverse (vertical) displacements η_x and η_y , and is given by

$$\rho_s h \partial_{tt} \eta_x - C_2 \partial_x \eta_y - C_3 \partial_{xx} \eta_x = f_{s,x}, \quad (5.1)$$

$$\rho_s h \partial_{tt} \eta_y + C_0 \eta_y - C_1 \partial_{xx} \eta_y + C_2 \partial_x \eta_x = f_{s,y}. \quad (5.2)$$

We note that due to the fluid–structure coupling, we have $\mathbf{f}_s = -\sigma \mathbf{n}$. The exact solutions are given by

$$\begin{aligned} \boldsymbol{\eta}^{ref} &= (\eta_x^{ref}, \eta_y^{ref})^T = \begin{bmatrix} 10^{-3} e^t \sin(\pi x) \sin(\pi y) \\ -10^{-3} \frac{e^t \cos(\pi x)}{\pi(C_2 - \mu)} (\rho_s h \sin(\pi y) + C_3 \pi^2 \sin(\pi y) + \mu \pi \cos(\pi y)) \end{bmatrix}, \\ \mathbf{u}^{ref} &= (u_x^{ref}, u_y^{ref})^T = \begin{bmatrix} 10^{-3} e^t \sin(\pi x) \sin(\pi y) \\ -10^{-3} \frac{e^t \cos(\pi x)}{\pi(C_2 - \mu)} (\rho_s h \sin(\pi y) + C_3 \pi^2 \sin(\pi y) + \mu \pi \cos(\pi y)) \end{bmatrix}, \\ p^{ref} &= (\rho_s h + C_0) u_y^{ref} - C_1 \frac{\partial^2 u_y^{ref}}{\partial x^2} + C_2 \frac{\partial u_x^{ref}}{\partial x} + 2\mu \frac{\partial u_y^{ref}}{\partial y}, \end{aligned}$$

using which the forcing term $\mathbf{f}_f$ is computed. We note that the exact solutions satisfy the coupling conditions Eqs. (2.3)–(2.4). Based on the exact solution, we impose Dirichlet boundary conditions on the bottom of the fluid domain, and Neumann boundary conditions on the sides. We also impose homogeneous Dirichlet boundary conditions for the structure. The parameters used in this problem are $\rho_f = \rho_s = h = C_0 = C_1 = C_2 = C_3 = 1$ and $\mu = 0.5$. The problem is solved until the final time $T = 10$ is reached.

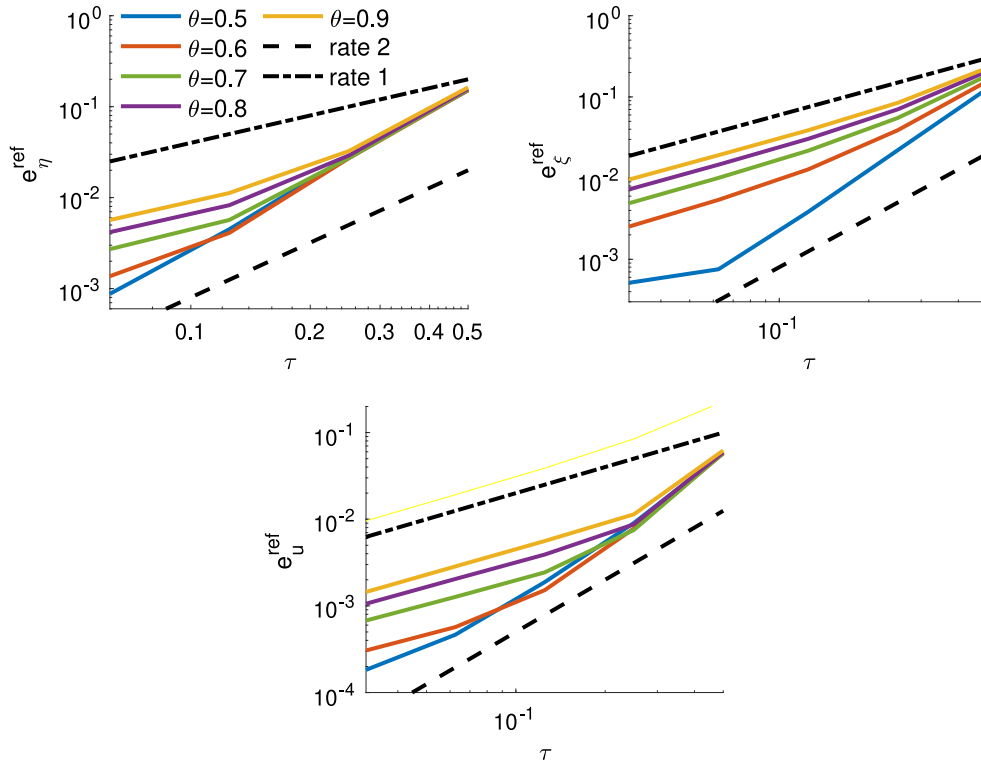


Fig. 2. Relative errors for the structure displacement (top-left), structure velocity (top-right), and fluid velocity (bottom) obtained using $\epsilon = 10^{-4}$.

To discretize the problem in space, we use $\mathbb{P}_2$ elements for the fluid velocity and solid displacement and velocity, and $\mathbb{P}_1$ elements for the pressure. In order to compute the rates of convergence of our scheme, we first define the errors for the solid displacement and velocity, and fluid velocity, respectively, as follows

$$e_{\eta}^{ref} = \frac{\|\eta - \eta^{ref}\|_S^2}{\|\eta^{ref}\|_S^2}, \quad e_{\xi}^{ref} = \frac{\|\xi - \xi^{ref}\|_{L^2(\Gamma)}}{\|\xi^{ref}\|_{L^2(\Gamma)}}, \quad e_u^{ref} = \frac{\|u - u^{ref}\|_{L^2(\Omega)}}{\|u^{ref}\|_{L^2(\Omega)}}, \quad (5.3)$$

where

$$\|\eta\|_S^2 = C_2 \|\partial_x \eta_x + \eta_y\|_{L^2(\Gamma)}^2 + (C_3 - C_2) \|\partial_x \eta_x\|_{L^2(\Gamma)}^2 + (C_0 - C_2) \|\eta_y\|_{L^2(\Gamma)}^2 + C_1 \|\partial_x \eta_y\|_{L^2(\Gamma)}^2.$$

The sub-iterative portion of [Algorithm 1](#), defined by Eqs. (3.5)–(3.6), is computed until the relative errors between two consecutive approximations for the fluid velocity, structure velocity and displacement are less than a given tolerance, ϵ . In the first test, we set $\epsilon = 10^{-4}$ and use the following set of discretization parameters

$$\{\tau, \Delta x\} = \left\{ \frac{0.02}{2^i}, \frac{0.25}{2^i} \right\}_{i=0}^3,$$

where Δx is the mesh size. [Fig. 2](#) shows the convergence rates obtained using different values of θ . We note that the second-order convergence is expected when $\theta = \frac{1}{2}$, because in this case the refactorized Cauchy's method corresponds to the midpoint rule. For $\theta = \frac{1}{2}$, we observe a second-order convergence for all the variables when the values of τ are large. However, for the smallest value of τ used in this example, sub-optimal convergence is observed in the fluid and solid velocities, while the structure displacement even exceeds the convergence rate of 2. As θ begins to increase, the rates start to deteriorate, approaching first-order convergence. We note that when $\theta = 0.5$, the errors are the smallest, which is especially apparent in the structure velocity.

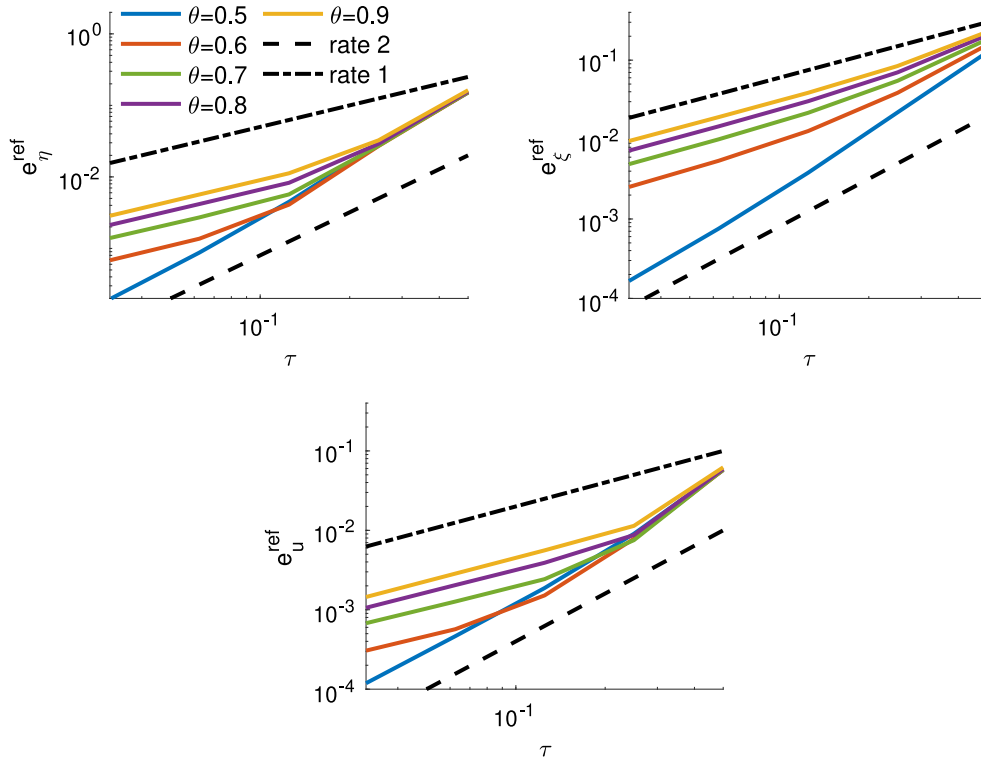


Fig. 3. Relative errors for the structure displacement (top-left), structure velocity (top-right), and fluid velocity (bottom) obtained using by decreasing ϵ at the same rate as τ .

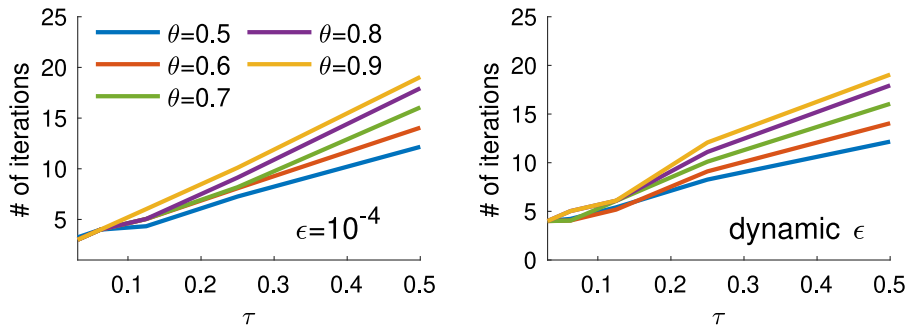


Fig. 4. Average number of sub-iterations obtained for different values of θ when $\epsilon = 10^{-4}$ (left) and when ϵ is changing at the same rate as τ (right).

To improve the sub-optimality observed in Fig. 2, we repeat the previous simulations, but this time we decrease the tolerance ϵ at the same rate at τ . In particular, we use the following set of parameters

$$\{\tau, \Delta x, \epsilon\} = \left\{ \frac{0.02}{2^i}, \frac{0.25}{2^i}, \frac{10^{-4}}{2^i} \right\}_{i=0}^3.$$

Fig. 3 shows the convergence rates across different values of θ . We note when $\theta = 0.6, 0.7, 0.8$ and 0.9 , the errors for all the variables are almost identical to those in Fig. 2. The errors also stay similar when $\theta = 0.5$ and τ is large. However, in this case smaller errors are obtained when $\theta = 0.5$ and $\tau = 3.125 \cdot 10^{-3}$, yielding the expected second-order accuracy for all the variables.

While computing the rates of convergence, we also calculated the average number of sub-iterations needed in the iterative part of our method. Fig. 4 shows the results obtained using $\epsilon = 10^{-4}$ (left), and the dynamic update

Table 1

Example 1: The number of iterations required by the proposed method (Algorithm 1), the Robin–Neumann (RN) method and the Robin–Robin (RR) method [16] for different parameter values.

τ	Δx	ρ_F	ρ_S	ϵ	RN	RR	Algorithm 1
$1.25 \cdot 10^{-1}$	10^{-1}	1	1	10^{-4}	9	5	5.2
$6.25 \cdot 10^{-2}$	10^{-1}	1	1	10^{-4}	6	5	4.1
$1.25 \cdot 10^{-1}$	$5 \cdot 10^{-2}$	1	1	10^{-4}	12.9	6	4.2
$1.25 \cdot 10^{-1}$	10^{-1}	10	1	10^{-4}	9	9	5.2
$6.25 \cdot 10^{-2}$	10^{-1}	1	10	10^{-4}	4	4	3.1
$6.25 \cdot 10^{-2}$	10^{-1}	1	1	10^{-3}	7	4	4

of ϵ , where ϵ is decreased at the same rate as τ . We note that in both cases, the average number of sub-iterations decreases with τ . For the smallest value of τ , the number of sub-iterations averages around 3 when ϵ is fixed, and 4 when ϵ is changing, for all values of θ . We also note that the number of sub-iterations increases with θ , leaving $\theta = 0.5$ an excellent choice since it features the smallest number of sub-iterations, as well as the best accuracy. Across all values of θ , a slightly larger number of sub-iterations is needed when ϵ is dynamically changing.

We compared the average number of iterations needed by Algorithm 1 and other commonly used strongly-coupled schemes in the literature. In particular, we considered the Robin–Neumann method and the Robin–Robin method described in [15,16]. The comparison of the results across different parameter values is shown in Table 1. We note that $\theta = 0.5$ was used in Algorithm 1. For most values considered in Table 1, a smaller number of sub-iterations is required by Algorithm 1 than by the Robin–Neumann and Robin–Robin methods.

5.2. Example 2

In this example, we consider the same setting as in Example 1, but we adapt the time step dynamically throughout the simulation instead of taking a fixed value. To adapt the time step, we compute the local truncation error for the fluid velocity, $\mathbf{u}$, and the structure displacement, $\boldsymbol{\eta}$, according to formula (4.2). In particular, the local truncation error is computed for u_x, u_y, η_x and η_y . The norm of the local truncation error is then computed in the L^2 -sense, separately for the velocity and displacement. In particular, we compute

$$\|\hat{T}_u^{n+1}\| = \left(\int_{\Omega} (\hat{T}_{u_x}^{n+1})^2 + (\hat{T}_{u_y}^{n+1})^2 \right)^{\frac{1}{2}}, \quad \|\hat{T}_\eta^{n+1}\| = \left(\int_{\Gamma} (\hat{T}_{\eta_x}^{n+1})^2 + (\hat{T}_{\eta_y}^{n+1})^2 \right)^{\frac{1}{2}}. \quad (5.4)$$

We first test the performance of the method by defining the local truncation error as

$$\|\hat{T}^{n+1}\| = \max\{\|\hat{T}_u^{n+1}\|, \|\hat{T}_\eta^{n+1}\|\}.$$

The initial time step is $\tau^0 = 10^{-1}$ and tolerance $\delta = 10^{-4}$ is used. As in the previous example, $T = 10$. We take $\epsilon = 10^{-4}$, $\Delta x = 0.025$, $s = 0.95$, $r_{min} = 0.2$, $r_{max} = 1.5$ and $\theta = \frac{1}{2}$, and start the time adaptation process after 10 iterations. The parameter values are the same as in Example 1. Fig. 5 shows the evolution of $\|\hat{T}_u\|$ (top-left) and $\|\hat{T}_\eta\|$ (bottom-left), as well as the evolution of the time step (top-right) and the number of trials needed at each iteration (bottom-right). To better illustrate the behavior of the local truncation error, $\|\hat{T}_u\|$ and $\|\hat{T}_\eta\|$ are shown on the interval $[1.45, 1.57]$. Due to the slow decrease of $\|\hat{T}_u\|$, the time step rapidly drops, and at time $t = 1.57$ is equal to $5.68 \cdot 10^{-33}$. In the next iteration, the time step keeps decreasing and the algorithm stops when it becomes too close to zero. Before the simulation breaks, seven trials are needed on average at each time step in order to obtain $\|\hat{T}^{n+1}\| < \delta$. In contrast to $\|\hat{T}_u\|$, $\|\hat{T}_\eta\|$ exhibits much faster convergence to zero.

Since the $\|\hat{T}_u^{n+1}\|$ dominates $\|\hat{T}_\eta^{n+1}\|$, a similar dynamics is also observed when the local truncation error is defined as

$$\|\hat{T}^{n+1}\| = \left(\|\hat{T}_u^{n+1}\|^2 + \|\hat{T}_\eta^{n+1}\|^2 \right)^{\frac{1}{2}}.$$

Hence, we define the local truncation error as

$$\|\hat{T}^{n+1}\| = \|\hat{T}_\eta^{n+1}\|,$$

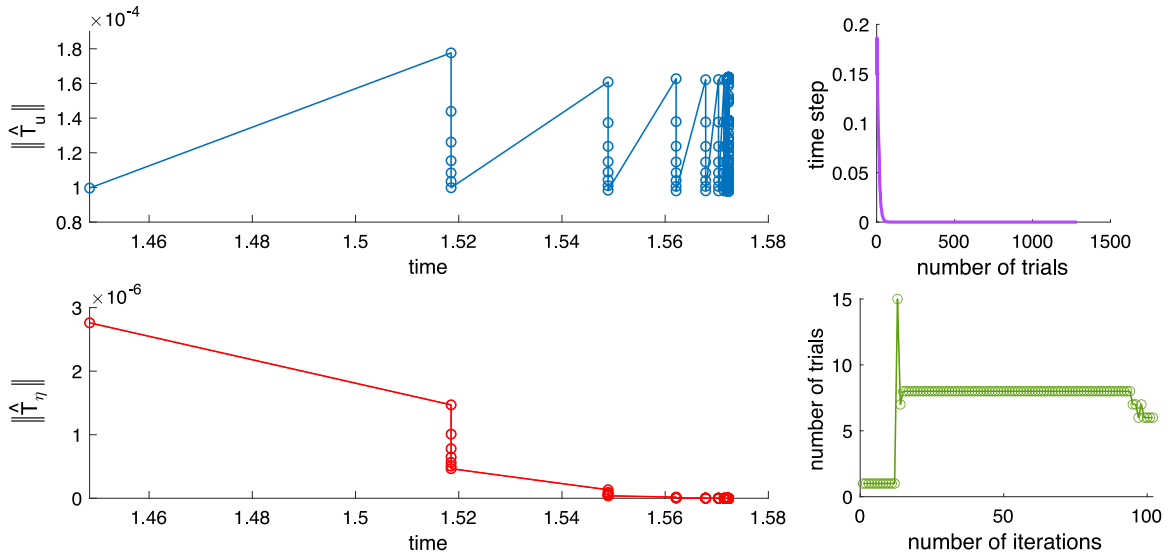


Fig. 5. Left: The local truncation errors for the fluid velocity (top) and the structure displacement (bottom). Right: Time evolution of the time step (top) and the number of trials in each time interval (bottom). The results were obtained defining the local truncation error as $\|\hat{T}^{n+1}\| = \|\hat{T}_u^{n+1}\|$.

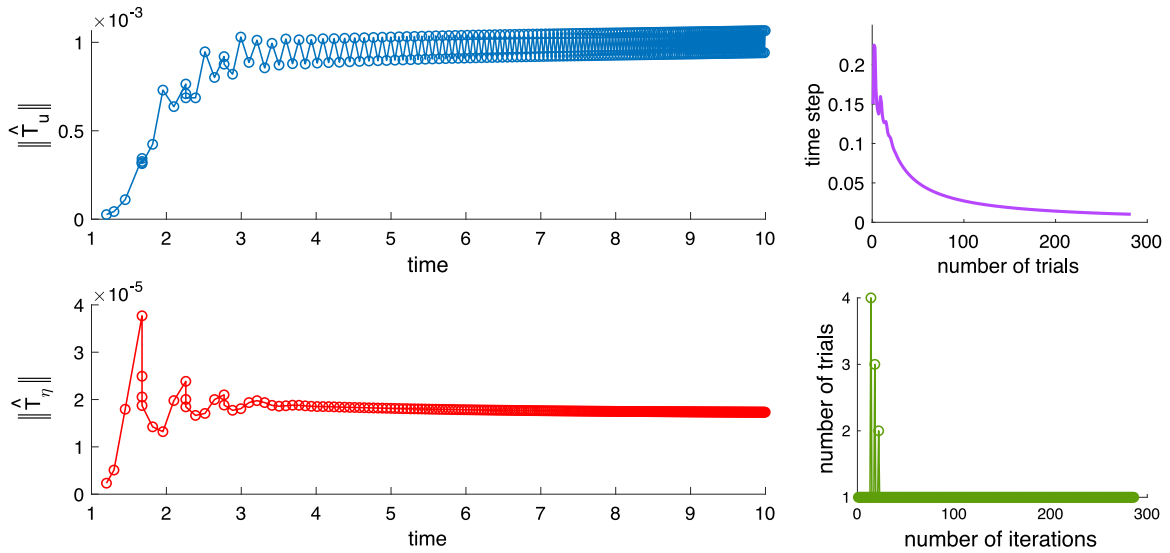


Fig. 6. Left: The local truncation errors for the fluid velocity (top) and the structure displacement (bottom). Right: Time evolution of the time step (top) and the number of trials in each time interval (bottom). The results were obtained defining the local truncation error as $\|\hat{T}^{n+1}\| = \|\hat{T}_\eta^{n+1}\|$.

and perform numerical simulations using parameters $\tau^0 = 10^{-1}$, $s = 0.95$, $r_{min} = 0.2$, $r_{max} = 1.5$, $\delta = 2 \cdot 10^{-5}$, $\epsilon = 10^{-4}$, $\Delta x = 0.025$, and $\theta = \frac{1}{2}$. As in the previous example, $T = 10$, and the time adaptation starts after 10 iterations. We note that a smaller value of δ is used here compared to the previous case because $\|\hat{T}_\eta^{n+1}\|$ is smaller than $\|\hat{T}_u^{n+1}\|$, as shown in Fig. 5.

The local truncation errors $\|\hat{T}_u^{n+1}\|$ and $\|\hat{T}_\eta^{n+1}\|$ obtained with this choice of $\|\hat{T}^{n+1}\|$, as well as the evolution of the time-step and the number of trials are shown in Fig. 6. Looking at the left panel, we observe that both $\|\hat{T}_u^{n+1}\|$ and $\|\hat{T}_\eta^{n+1}\|$ remain bounded, even though $\|\hat{T}_u^{n+1}\|$ was not included in the computation of $\|\hat{T}^{n+1}\|$. The number

Table 2

Relative errors e_u^{ref} , e_ξ^{ref} , $e_{\eta, L^2(\Gamma)}^{ref}$ and e_η^{ref} obtained using the kinematically coupled β -scheme [21,25], Algorithm 1 with a fixed time step, Algorithm 1 with a variable time step and fixed ϵ and Algorithm 1 with a variable time step and variable ϵ .

$\delta = 2 \cdot 10^{-3}$	e_u^{ref}	e_ξ^{ref}	$e_{\eta, L^2(\Gamma)}^{ref}$	e_η^{ref}
Kinematically coupled β -scheme	$9.51 \cdot 10^{-3}$	$8.62 \cdot 10^{-2}$	$3.14 \cdot 10^{-2}$	$3.24 \cdot 10^{-2}$
Algorithm 1 w/fixed time-step	$1.63 \cdot 10^{-3}$	$2.49 \cdot 10^{-3}$	$1.35 \cdot 10^{-3}$	$1.37 \cdot 10^{-3}$
Algorithm 1 w/adaptive time-step and fixed ϵ	$2.65 \cdot 10^{-4}$	$2.87 \cdot 10^{-4}$	$3.16 \cdot 10^{-4}$	$5.47 \cdot 10^{-4}$
Algorithm 1 w/adaptive time-step and ϵ	$2.65 \cdot 10^{-4}$	$2.86 \cdot 10^{-4}$	$3.16 \cdot 10^{-4}$	$5.47 \cdot 10^{-4}$
$\delta = 2 \cdot 10^{-5}$	e_u^{ref}	e_ξ^{ref}	$e_{\eta, L^2(\Gamma)}^{ref}$	e_η^{ref}
Kinematically coupled β -scheme	$7.16 \cdot 10^{-4}$	$1.70 \cdot 10^{-2}$	$5.14 \cdot 10^{-4}$	$1.04 \cdot 10^{-3}$
Algorithm 1 w/fixed time-step	$1.47 \cdot 10^{-4}$	$2.90 \cdot 10^{-4}$	$2.44 \cdot 10^{-4}$	$5.14 \cdot 10^{-4}$
Algorithm 1 w/adaptive time-step and fixed ϵ	$3.98 \cdot 10^{-5}$	$2.52 \cdot 10^{-4}$	$2.46 \cdot 10^{-4}$	$5.29 \cdot 10^{-4}$
Algorithm 1 w/adaptive time-step and ϵ	$3.98 \cdot 10^{-5}$	$2.52 \cdot 10^{-4}$	$2.46 \cdot 10^{-4}$	$5.29 \cdot 10^{-4}$

of trials is greater than one only three times in the first part of the simulation, as shown in the bottom-right panel. After that, only one trial is needed for the rest of the simulation. The time step, shown in the top-right panel, is decreasing throughout the simulation, albeit slowly toward the end. The time step at the end of the simulation is equal to 10^{-2} . Since both $\|\hat{T}_u^{n+1}\|$ and $\|\hat{T}_\eta^{n+1}\|$ remain bounded in this example, the time step evolution is reasonable and the number of trials is low, we use $\|\hat{T}_u^{n+1}\| = \|\hat{T}_\eta^{n+1}\|$ in the remainder of the paper.

Since it was shown in Section 5.1 that the tolerance, ϵ , used in the sub-iterative part of the algorithm needs to be varied together with the time step in order to retain a second-order convergence rate, we also test the performance of the method using the same parameters as in the previous case, but this time adapting ϵ together with the time step. However, we set an upper bound on ϵ to preserve the accuracy of the sub-iterative solution. In particular, we set

$$\epsilon^{new} = \min \left\{ \epsilon^n \min \left\{ r_{max}, \max \left\{ r_{min}, s \left(\frac{\delta}{\|\hat{T}_\eta^{n+1}\|} \right)^{\frac{1}{3}} \right\} \right\}, \epsilon^0 \right\}, \quad (5.5)$$

and adapt it together with the time step. We perform numerical simulations by using both fixed and adaptive values of ϵ , and the adaptivity tolerances $\delta = 2 \cdot 10^{-5}$ and $2 \cdot 10^{-3}$. In each case, we count the total number of trials needed in the adaptive algorithm, and then perform simulations using Algorithm 1 with a fixed time step obtained by dividing the final time by the total number of trials. Using the same time step, we also perform simulations using the kinematically coupled β -scheme [21,25]. At the end of each simulation, we compute the relative error between the approximated and the exact solution. For this purpose, in addition to errors defined in (5.3), we also introduce the L^2 -error for the structure displacement, defined as

$$e_{\eta, L^2(\Gamma)}^{ref} = \frac{\|\boldsymbol{\eta} - \boldsymbol{\eta}^{ref}\|_{L^2(\Gamma)}^2}{\|\boldsymbol{\eta}^{ref}\|_{L^2(\Gamma)}^2}.$$

Table 2 shows a comparison of the relative errors obtained using the kinematically coupled β -scheme, Algorithm 1 with a fixed time step, Algorithm 1 with a variable time step and fixed ϵ , and Algorithm 1 with a variable time step and variable ϵ . When $\delta = 2 \cdot 10^{-3}$, the errors obtained using the adaptive time-stepping are by an order of magnitude smaller than the errors obtained with methods that use a fixed time step. For a smaller value of δ , the adaptive time-stepping still gives better approximations of the fluid and solid velocities. However, errors for the displacement obtained using Algorithm 1 with fixed and variable time-stepping are comparable, but still significantly smaller than the ones obtained by the kinematically coupled β -scheme. We also note that for both values of δ , the errors obtained using the adaptive algorithm with fixed and variable ϵ are nearly identical.

5.3. Example 3

In this example, we consider a classical benchmark problem describing the flow in a two-dimensional channel with a deformable wall. The fluid domain is $\Omega = (0, L) \times (0, R)$, where $L = 5$ cm and $R = 0.5$ cm. We assume

Table 3

Fluid and structure parameters used in Example 3.

Parameters	Values	Parameters	Values
Fluid density ρ_f (g/cm ³)	1	Dyn. viscosity μ (dyn s/cm ²)	0.035
Wall density ρ_s (g/cm ³)	1.1	Wall thickness h_s (cm)	0.1
Young's mod. E (dyn/cm ²)	0.75×10^6	Poisson's ratio ν	0.5

that the top boundary is deformable, allowing only deformation in the radial direction. Hence, $\boldsymbol{\eta} = (0, \eta_y)$, and the structure dynamics is described by

$$\rho_s h \partial_{tt} \eta_y + C_0 \eta_y - C_1 \partial_{xx} \eta_y = f_{s,y},$$

where

$$C_0 = \frac{hE}{R^2(1-\nu^2)}, \quad C_1 = \frac{hE}{2(1+\nu)},$$

and E and ν denote the Young's modulus and Poisson's ratio, respectively. We assume that the structure is fixed at the edges. At the bottom fluid boundary we prescribe symmetry boundary conditions, given by

$$u_y = 0, \quad \partial_y u_x = 0.$$

The flow is driven by prescribing a time-dependent pressure drop at the inlet and outlet sections, as defined in (2.1c)–(2.1d), where

$$p_{in}(t) = \begin{cases} \frac{p_{max}}{2} \left[1 - \cos\left(\frac{2\pi t}{t_{max}}\right) \right], & \text{if } t \leq t_{max} \\ 0, & \text{if } t > t_{max} \end{cases}, \quad p_{out} = 0, \quad (5.6)$$

for all $t \in (0, T)$. The pressure pulse is in effect for $t_{max} = 0.003$ s with maximum pressure $p_{max} = 1.333 \times 10^4$ dyn/cm². The final time is $T = 10$ ms. The fluid and structure parameters, which are within physiologically realistic values of blood flow in compliant arteries, are given in Table 3. In this example, we set $\theta = \frac{1}{2}$ and initial tolerance $\epsilon^0 = 10^{-4}$, which is afterwards updated dynamically according to (5.5).

We use $\mathbb{P}_2 - \mathbb{P}_1$ elements for the fluid velocity and pressure, respectively, and $\mathbb{P}_2$ elements for the structure velocity and displacement on a mesh containing 16,000 elements in the fluid domain and 400 elements in the structure domain. The problem is solved using Algorithm 1 with both fixed and adaptive time steps and the kinematically coupled β -scheme [21,25]. The results are compared to the reference data, obtained using a second-order monolithic scheme.

We first solve the problem using Algorithm 1 with an adaptive time step. We use $\delta = 4 \cdot 10^{-4}$, $s = 0.95$, $r_{min} = 0.2$, $r_{max} = 1.5$, and the initial time step of $\tau^0 = 2 \cdot 10^{-4}$, resulting in 46 trials. Dividing the final time ($T = 0.0101922$) with the number of trials, we get the time step of $2.216 \cdot 10^{-4}$, which is used in the fixed time-stepping version of Algorithm 1 and the kinematically coupled β -scheme. For the monolithic method, the time step is obtained by dividing the final time by 1000. The evolution of the variable time step, compared to the value of the fixed time step obtained using this process, is shown in the top-left panel of Fig. 7. We observe that due to the number of rejected trials, the value of the constant time step is smaller than the values of the variable time step during most of the simulation. Therefore, to reduce the number of rejected trials, and to decrease the range of the possible ratios between two consecutive time steps (which is more appropriate for stiff problems such as this benchmark), we repeat the simulation using $\delta = 4 \cdot 10^{-4}$, $s = 0.85$, $r_{min} = 0.5$, $r_{max} = 1.2$, starting from the same initial time step of $\tau^0 = 2 \cdot 10^{-4}$. The comparison of the time step evolution of the variable time step and the fixed time step, shown in the top-right panel of Fig. 7, indicates that in this case, the variable time step is initially larger than the fixed time step, but as the inlet pressure reduces to zero, the variable time step becomes smaller than the fixed one.

The structure displacement, and pressure and axial velocity at the bottom boundary, at the end of the simulation, are shown in Fig. 8. The values obtained using $s = 0.95$, $r_{min} = 0.2$, $r_{max} = 1.5$ are shown in the left panel and the values obtained using $s = 0.85$, $r_{min} = 0.5$, $r_{max} = 1.2$ are shown in the right panel. In the case shown in the left panel, the fixed time step is smaller than the variable time step most of the time, so the results obtained using

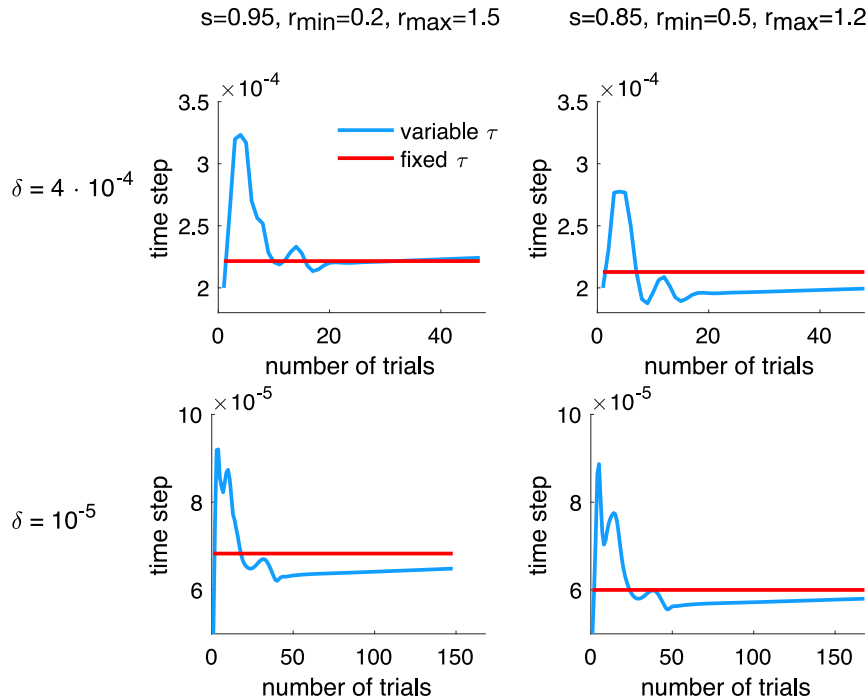


Fig. 7. Comparison of the variable and fixed time steps obtained using $s = 0.95, r_{\min} = 0.2, r_{\max} = 1.5$ (left) and $s = 0.85, r_{\min} = 0.5, r_{\max} = 1.2$ (right). The top row is obtained with tolerance $\delta = 4 \cdot 10^{-4}$, and the bottom row with $\delta = 10^{-5}$.

the fixed time-stepping version of [Algorithm 1](#) are slightly closer to the monolithic results than the ones obtained using the variable time-stepping. When parameters $s = 0.85, r_{\min} = 0.5, r_{\max} = 1.2$ are used, the results obtained using the variable time-stepping are improved, providing a slightly better agreement with the monolithic method than the ones obtained using the fixed time step. In both cases shown in [Fig. 7](#), the results obtained using the fixed and variable time-stepping versions of [Algorithm 1](#) only slightly differ, and are very close to the monolithic ones even though relatively large time steps are used. Furthermore, they provide a significantly better agreement than the ones obtained using the kinematically coupled β -scheme.

We repeat the tests performed in this example by taking a smaller tolerance, $\delta = 10^{-5}$, and starting from a smaller initial time-step, $\tau^0 = 5 \cdot 10^{-5}$. As in the previous example, parameter sets $s = 0.95, r_{\min} = 0.2, r_{\max} = 1.5$ and $s = 0.85, r_{\min} = 0.5, r_{\max} = 1.2$ are used. The time evolution of the variable time step is shown in the bottom panel of [Fig. 7](#). The comparison of the structure displacement, and pressure and axial velocity at the bottom boundary obtained using the two parameter sets are shown in [Fig. 9](#). We observe that the results obtained using [Algorithm 1](#) provide an excellent agreement with the monolithic scheme. Even though there are instances where the fixed or variable versions of [Algorithm 1](#) give slightly better approximation, overall both approaches are very close together for both sets of parameters.

5.4. Example 4

In this example, we consider a moving domain, lid driven cavity with a flexible bottom. A similar problem, but with a different structural model, was previously studied in [\[53\]](#). The fluid domain is a square with dimensions $100 \text{ cm} \times 100 \text{ cm}$. At the top boundary, a periodic velocity is prescribed by

$$u_x = 100 \left(1 - \cos \left(\frac{2\pi t}{5} \right) \right) \text{ cm/s}, \quad u_y = 0.$$

At each side, the first five nodes from the top are unconstrained to allow free inflow and outflow of fluid, so that the structural displacement is not constrained by the fluid's incompressibility [\[54\]](#). At the remaining nodes on the left

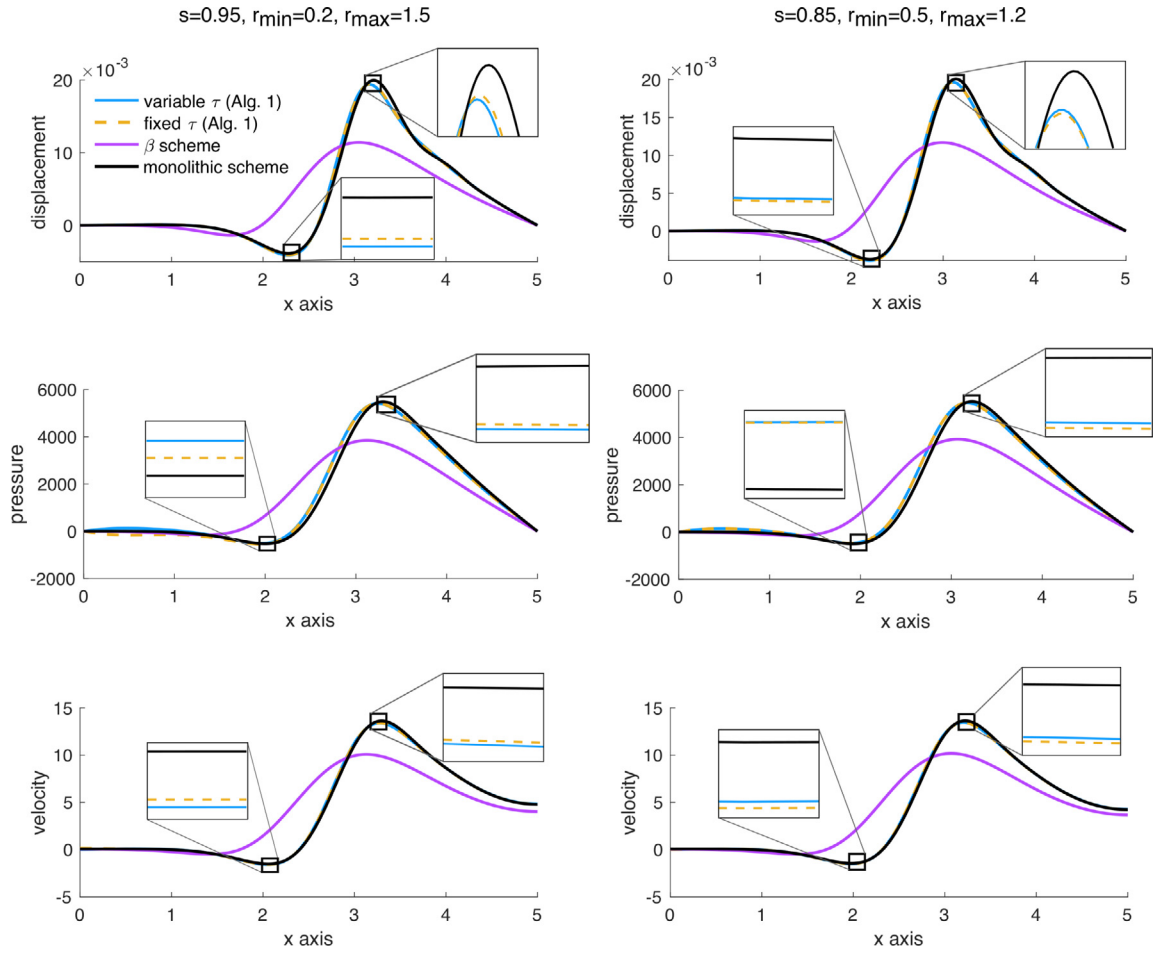


Fig. 8. Comparison of the structure displacement (top), pressure at the bottom boundary (middle) and axial velocity at the bottom boundary (bottom) obtained using Algorithm 1 with a variable time-step, Algorithm 1 with a fixed time-step, the kinematically coupled β scheme [21,25], and a monolithic scheme. Algorithm 1 with a variable time-step was solved using $s = 0.95, r_{min} = 0.2, r_{max} = 1.5$ (left) and $s = 0.85, r_{min} = 0.5, r_{max} = 1.2$ (right). In both cases, tolerance $\delta = 4 \cdot 10^{-4}$ is used.

and right sides, the no-slip boundary conditions are imposed. The bottom boundary represents an elastic structure which deforms only in the vertical direction, i.e., $\eta = (0, \eta_y)$, modeled by

$$\rho_s h \partial_{tt} \eta_y - C_1 \partial_{xx} \eta_y = f_{s,y},$$

where

$$C_1 = \frac{hE}{2(1+\nu)},$$

and E and ν denote the Young's modulus and Poisson's ratio, respectively. We assume that the structure is fixed at the edges. To model the fluid flow, we use the Navier–Stokes equations. The parameters used in this example are given in Table 4.

The fluid velocity and pressure are discretized using $\mathbb{P}_2 - \mathbb{P}_1$ elements, while $\mathbb{P}_2$ elements are used for the structure. The problem is solved on a uniform 50×50 element mesh. The final time is $T = 32$ s. For the time adaptivity, we use $s = 0.85, r_{min} = 0.5, r_{max} = 1.2$ and $\delta = 2 \cdot 10^{-6}$. The fluid and structure subproblems are iteratively solved in the BE part of the algorithm until the tolerance of $\epsilon = 10^{-4}$ is reached. The problem is solved using $\theta = 0.5$.

To deal with the motion of the fluid domain, we use the Arbitrary Lagrangian–Eulerian approach. The extension of Algorithm 1 to moving domain problems is outlined in Fig. 10.

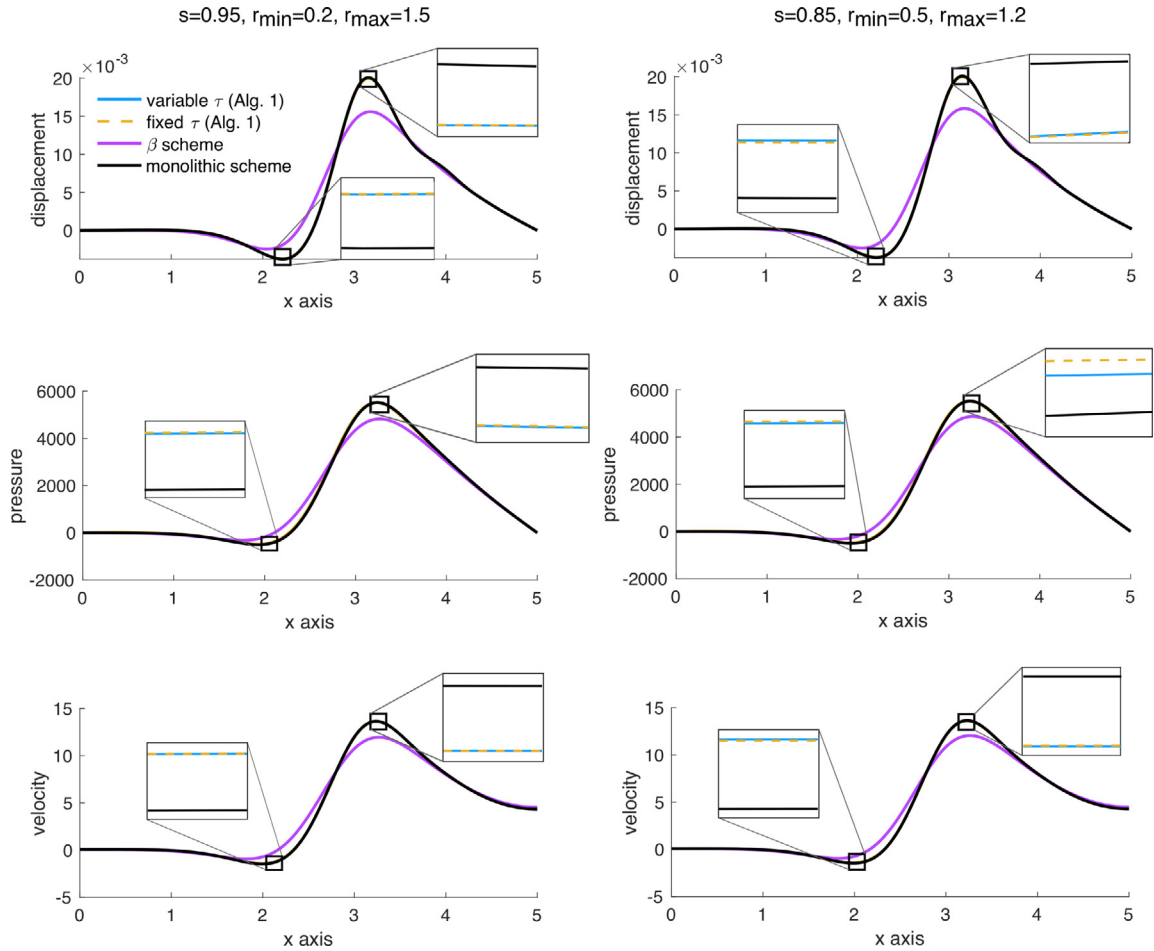


Fig. 9. Comparison of the structure displacement (top), pressure at the bottom boundary (middle) and axial velocity at the bottom boundary (bottom) obtained using Algorithm 1 with a variable time-step, Algorithm 1 with a fixed time-step, the kinematically coupled β scheme [21,25], and a monolithic scheme. Algorithm 1 with a variable time-step was solved using $s = 0.95$, $r_{min} = 0.2$, $r_{max} = 1.5$ (left) and $s = 0.85$, $r_{min} = 0.5$, $r_{max} = 1.2$ (right). In both cases, tolerance $\delta = 10^{-5}$ is used.

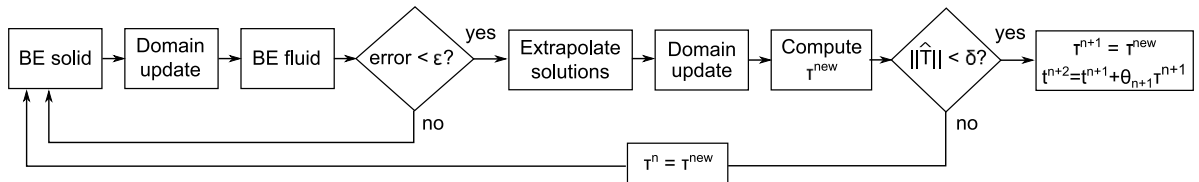


Fig. 10. The extension of Algorithm 1 to moving domain problems.

Fig. 11 shows the structure displacement in the center of the domain over time. One can see that the periodic regime is quickly reached. The solution obtained using Algorithm 1 with an adaptive time step is compared to the solution obtained using Algorithm 1 with a fixed time step. An excellent agreement is observed.

The evolution of the time step is shown in Fig. 12. We note that the time step also reaches an almost periodic regime, allowing the time step to oscillate between 0.0065 and 0.0292. With these values, the number of trials remains low, as shown in Fig. 13. In particular, in most cases, one trial is enough to advance in time, while occasionally two trials are needed, resulting in the average number of trials equal to 1.017.

Table 4

Fluid and structure parameters used in Example 4.

Parameters	Values	Parameters	Values
Fluid density ρ_f (g/cm ³)	10^{-3}	Dyn. viscosity μ (dyn s/cm ²)	0.1
Wall density ρ_s (g/cm ³)	0.5	Wall thickness h_s (cm)	0.2
Young's mod. E (dyn/cm ²)	2.5×10^4	Poisson's ratio ν	0.4

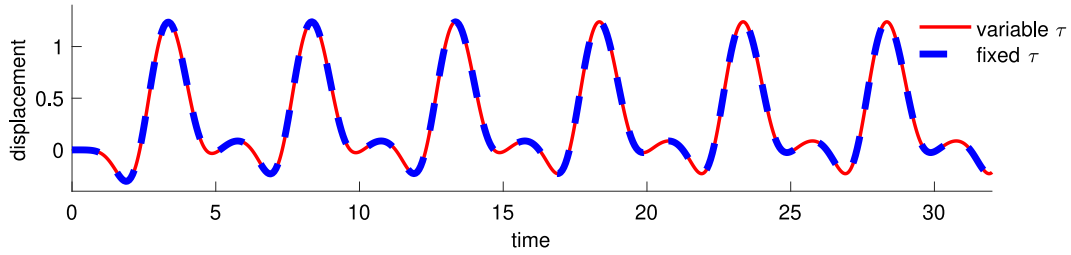


Fig. 11. The displacement at the center of the domain over time obtained using Algorithm 1 with variable (solid red line) and fixed (dashed blue line) time stepping. (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

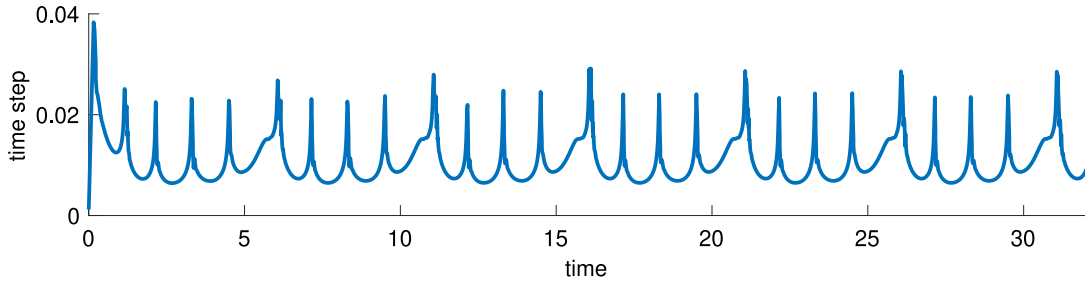


Fig. 12. The evolution of the time step versus time.

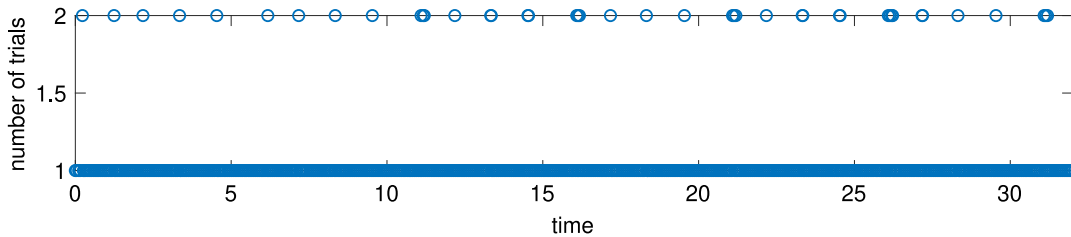


Fig. 13. The number of trials versus time.

6. Conclusions

We proposed a novel, adaptive, strongly-coupled partitioned method for the interaction between an incompressible, viscous fluid and a thin elastic structure. The proposed method is based on the refactorized Cauchy's one-legged ' θ -like' method and the kinematically coupled β -scheme. The fluid and structure sub-problems are first solved sub-iteratively until convergence, and then linearly extrapolated. This process yields a second-order convergence rate when $\theta = \frac{1}{2}$. We proved that the sub-iterative process is linearly convergent, and that the method is unconditionally energy bounded/stable provided $\theta \geq \frac{1}{2}$.

The algorithm is computationally tested on four numerical examples. We note that the proposed method is novel even when it is considered with a fixed time step, in which case it can be seen as a second-order extension of the kinematically coupled β -scheme when $\beta = 1$. Therefore, in the first example, we studied the accuracy of the

algorithm used with a fixed time step on a benchmark problem based on the method of manufactured solutions. We confirmed a second-order convergence rate when $\theta = \frac{1}{2}$ and the tolerance used in the sub-iterative process is changed dynamically with the time step. We also showed that the average number of sub-iterations between the fluid and structure sub-problems is smaller than the one obtained by other strongly-coupled methods commonly used in the literature for most of cases considered in this study.

In the other examples, we applied the proposed algorithm using both fixed and adaptive time steps, and the proposed algorithm is extended to model a moving domain FSI problem in the last example. Our results indicate that the variable time-stepping approach can have a significant advantage over a fixed time-stepping when larger adaptivity tolerances are used, yielding larger time steps, especially in less stiff benchmark problems. In stiff problems, to obtain a better performance, the parameters used in the adaptivity process need to be changed to reduce the ratio between two consecutive time steps, as well as the number of rejected trials. In all examples considered in this study, the approximations obtained using fixed and variable time-stepping versions of [Algorithm 1](#) are nearly indistinguishable when the adaptivity tolerance is small, and provide an excellent agreement when compared to the reference data.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

The work of MB was partially supported by the NSF, USA under grants DMS 1912908 and DCSD 1934300.

References

- [1] G. Dahlquist, W. Liniger, O. Nevanlinna, Stability of two-step methods for variable integration steps, *SIAM J. Numer. Anal.* 20 (5) (1983) 1071–1085.
- [2] E. Hairer, S. Nørsett, G. Wanner, *Solving Ordinary Differential Equations I: Nonstiff Problems: With 105 Figures*, Springer-Verlag, 1987.
- [3] G. Akrivis, *Numerical Methods for Initial Value Problems*, in: *Lecture Notes from a Course Taught at BCAM*, Basque Center for Applied Mathematics, Bilbao, Basque Country, Spain, 2012.
- [4] H. Stetter, *Analysis of Discretization Methods for Ordinary Differential Equations*, Vol. 23, Springer, 1973.
- [5] O. Nevanlinna, W. Liniger, Contractive methods for stiff differential equations. I, *BIT* 18 (4) (1978) 457–474, <http://dx.doi.org/10.1007/BF01932025>, URL <https://doi-org.pitt.idm.oclc.org/10.1007/BF01932025>.
- [6] O. Nevanlinna, W. Liniger, Contractive methods for stiff differential equations. II, *BIT* 19 (1) (1979) 53–72, <http://dx.doi.org/10.1007/BF01931222>, URL <https://doi-org.pitt.idm.oclc.org/10.1007/BF01931222>.
- [7] J. Burkardt, C. Trenchea, Refactorization of the midpoint rule, *Appl. Math. Lett.* 107 (2020) 106438.
- [8] M. Mayr, W. Wall, M. Gee, Adaptive time stepping for fluid-structure interaction solvers, *Finite Elem. Anal. Des.* 141 (2018) 55–69.
- [9] L. Failer, T. Wick, Adaptive time-step control for nonlinear fluid–structure interaction, *J. Comput. Phys.* 366 (2018) 448–477.
- [10] P. de Sampaio, P. Hallak, A. Coutinho, M. Pfeil, A stabilized finite element procedure for turbulent fluid–structure interaction using adaptive time–space refinement, *Internat. J. Numer. Methods Fluids* 44 (6) (2004) 673–693.
- [11] P. Birken, K. Quint, S. Hartmann, A. Meister, A time-adaptive fluid-structure interaction method for thermal coupling, *Comput. Vis. Sci.* 13 (7) (2010) 331–340.
- [12] P. Birken, T. Gleim, D. Kuhl, A. Meister, Fast solvers for unsteady thermal fluid structure interaction, *Internat. J. Numer. Methods Fluids* 79 (1) (2015) 16–29.
- [13] H. Baek, G. Karniadakis, A convergence study of a new partitioned fluid–structure interaction algorithm based on fictitious mass and damping, *J. Comput. Phys.* 231 (2) (2012) 629–652.
- [14] Y. Yu, H. Baek, G. Karniadakis, Generalized fictitious methods for fluid–structure interactions: analysis and simulations, *J. Comput. Phys.* 245 (2013) 317–346.
- [15] S. Badia, F. Nobile, C. Vergara, Fluid-structure partitioned procedures based on robin transmission conditions, *J. Comput. Phys.* 227 (2008) 7027–7051.
- [16] S. Badia, F. Nobile, C. Vergara, Robin-Robin preconditioned krylov methods for fluid-structure interaction problems, *Comput. Methods Appl. Mech. Engrg.* 198 (33) (2009) 2768–2784.
- [17] M. Fernández, Incremental displacement-correction schemes for incompressible fluid-structure interaction: stability and convergence analysis, *Numer. Math.* 123 (1) (2013) 21–65.
- [18] J. Banks, W. Henshaw, D. Schwendeman, An analysis of a new stable partitioned algorithm for FSI problems. Part II: Incompressible flow and structural shells, *J. Comput. Phys.* 268 (2014) 399–416.

- [19] M. Lukáčová-Medvid'ová, G. Rusnáková, A. Hundertmark-Zaušková, Kinematic splitting algorithm for fluid–structure interaction in hemodynamics, *Comput. Methods Appl. Mech. Engrg.* 265 (2013) 83–106.
- [20] O. Oyekole, C. Trenchea, M. Bukac, A second-order in time approximation of fluid-structure interaction problem, *SIAM J. Numer. Anal.* 56 (1) (2018) 590–613.
- [21] M. Bukač, S. Čanić, R. Glowinski, J. Tambača, A. Quaini, Fluid-structure interaction in blood flow capturing non-zero longitudinal structure displacement, *J. Comput. Phys.* 235 (2012) 515–541.
- [22] M. Bukač, C. Trenchea, Boundary update via resolvent for fluid-structure interaction, *J. Numer. Math.* 29 (1) (2021) 1–22, <http://dx.doi.org/10.1515/jnma-2019-0081>, URL <https://doi-org.pitt.idm.oclc.org/10.1515/jnma-2019-0081>.
- [23] A. Seboldt, M. Bukač, A non-iterative domain decomposition method for the interaction between a fluid and a thick structure, *Numer. Methods Partial Differential Equations* 37 (4) (2021) 2803–2832, <http://dx.doi.org/10.1002/num.22771>, URL <https://doi-org.pitt.idm.oclc.org/10.1002/num.22771>.
- [24] M. Bukač, A. Seboldt, C. Trenchea, Refactorization of Cauchy's method: a second-order partitioned method for fluid-thick structure interaction problems, *J. Math. Fluid Mech.* 23 (3) (2021) <http://dx.doi.org/10.1007/s00021-021-00593-z>, Paper No. 64, 25. URL <https://doi-org.pitt.idm.oclc.org/10.1007/s00021-021-00593-z>.
- [25] M. Bukac, B. Muha, Stability and convergence analysis of the extensions of the kinematically coupled scheme for the fluid-structure interaction, *SIAM J. Numer. Anal.* 54 (5) (2016) 3032–3061.
- [26] E. Burman, M. Fernández, Stabilization of explicit coupling in fluid-structure interaction involving fluid incompressibility, *Comput. Methods Appl. Mech. Engrg.* 198 (2009) 766–784.
- [27] J. Banks, W. Henshaw, D. Schwendeman, An analysis of a new stable partitioned algorithm for FSI problems. Part I: Incompressible flow and elastic solids, *J. Comput. Phys.* 269 (2014) 108–137.
- [28] Y. Bazilevs, K. Takizawa, T.E. Tezduyar, *Computational Fluid-Structure Interaction: Methods and Applications*, John Wiley & Sons, 2013.
- [29] Y. Bazilevs, V. Calo, T. Hughes, Y. Zhang, Isogeometric fluid-structure interaction: theory, algorithms, and computations, *Comput. Mech.* 43 (1) (2008) 3–37.
- [30] H. Brezis, *Functional Analysis, Sobolev Spaces and Partial Differential Equations*, in: Universitext, Springer, New York, 2011, p. xiv+599.
- [31] M. Bukač, I. Yotov, P. Zunino, An operator splitting approach for the interaction between a fluid and a multilayered poroelastic structure, *Numer. Methods Partial Differential Equations* 31 (4) (2015) 1054–1100.
- [32] A.-L. Cauchy, *équations Différentielles Ordinaires*, Éditions Études Vivantes, Ltée., Ville Saint-Laurent, QC; Johnson Reprint Corp., New York, 1981, p. lviii+147, Cours inédit. Fragment. [Unpublished course. Fragment], With a preface by Jean Dieudonné, With an introduction by Christian Gilain.
- [33] V. Girault, P.-A. Raviart, *Finite Element Approximation of the Navier-Stokes Equations*, in: *Lecture Notes in Mathematics*, vol. 749, 1979.
- [34] J. Butcher, N. Goodwin, *Numerical Methods for Ordinary Differential Equations*, Vol. 2, Wiley Online Library, 2008.
- [35] G. Dahlquist, A. Björck, *Numerical Methods*, Dover Publications, Inc., Mineola, NY, 2003, Translated from the Swedish by Ned Anderson, Reprint of the 1974 English translation.
- [36] G. Dahlquist, On Stability and Error Analysis for Stiff Non-linear Problems PART I, Tech. rep., CM-P00069396, 1975.
- [37] W. Gear, *Numerical Initial Value Problems in Ordinary Differential Equations*, Vol. 1, Prentice Hall, 1971.
- [38] E. Godlewski, P.-A. Raviart, *Numerical Approximation of Hyperbolic Systems of Conservation Laws*, Vol. 118, Springer Science & Business Media, 2013.
- [39] U.M. Ascher, S. Reich, The midpoint scheme and variants for Hamiltonian systems: advantages and pitfalls, *SIAM J. Sci. Comput.* 21 (3) (1999) 1045–1065, <http://dx.doi.org/10.1137/S1064827597316059>.
- [40] P.B. Bochev, C. Scovel, On quadratic invariants and symplectic structure, *BIT* 34 (3) (1994) 337–345, <http://dx.doi.org/10.1007/BF01935643>.
- [41] F. Ceschino, Modification de la longueur du pas dans l'intégration numérique par les méthodes à pas liés, *Chiffres* 4 (1961) 101–106.
- [42] E. Hairer, S.P. Nørsett, G. Wanner, *Solving Ordinary Differential Equations. I*, second ed., in: *Springer Series in Computational Mathematics*, vol. 8, Springer-Verlag, Berlin, 1993, p. xvi+528, Nonstiff problems.
- [43] G.Y. Kulikov, S.K. Shindin, One-leg variable-coefficient formulas for ordinary differential equations and local-global step size control, *Numer. Algorithms* 43 (1) (2006) 99–121, <http://dx.doi.org/10.1007/s11075-006-9043-5>, URL <https://doi-org.pitt.idm.oclc.org/10.1007/s11075-006-9043-5>.
- [44] G.Y. Kulikov, S.K. Shindin, On multistep interpolation-type methods with automatic control of global error, *Comput. Math. Math. Phys.* 44 (8) (2004) 1314–1333.
- [45] M. Crouzeix, F.J. Lisbona, The convergence of variable-stepsize, variable-formula, multistep methods, *SIAM J. Numer. Anal.* 21 (3) (1984) 512–534, <http://dx.doi.org/10.1137/0721037>, URL <https://doi-org.pitt.idm.oclc.org/10.1137/0721037>.
- [46] C.W. Gear, K.W. Tu, The effect of variable mesh size on the stability of multistep methods, *SIAM J. Numer. Anal.* 11 (1974) 1025–1043, <http://dx.doi.org/10.1137/0711079>, URL <https://doi-org.pitt.idm.oclc.org/10.1137/0711079>.
- [47] D. Griffiths, D. Higham, *Numerical Methods for Ordinary Differential Equations: Initial Value Problems*, Springer Science & Business Media, 2010.
- [48] W.E. Milne, Numerical integration of ordinary differential equations, *Amer. Math. Monthly* 33 (9) (1926) 455–460, <http://dx.doi.org/10.2307/2299609>, URL <https://doi-org.pitt.idm.oclc.org/10.2307/2299609>.
- [49] F. Moulton, *New Methods in Exterior Ballistics*, Univ. Chicago Press, 1926.
- [50] F.R. Moulton, Questions and discussions: Discussions: New methods in exterior ballistics, *Amer. Math. Monthly* 35 (5) (1928) 246–250, <http://dx.doi.org/10.2307/2299587>, URL <https://doi-org.pitt.idm.oclc.org/10.2307/2299587>.

- [51] J.D. Lambert, Numerical Methods for Ordinary Differential Systems, John Wiley & Sons, Ltd., Chichester, 1991, p. x+293, The initial value problem.
- [52] F. Hecht, New development in freefem++, J. Numer. Math. 20 (3–4) (2012) 251–265.
- [53] U. Küttler, W.A. Wall, Fixed-point fluid–structure interaction solvers with dynamic relaxation, Comput. Mech. 43 (1) (2008) 61–72.
- [54] U. Küttler, C. Förster, W.A. Wall, A solution for the incompressibility dilemma in partitioned fluid–structure interaction with pure Dirichlet fluid domains, Comput. Mech. 38 (4) (2006) 417–429.