

Multirobot Control Strategies for Collective Transport

Hamed Farivarnejad and Spring Berman

School for Engineering of Matter, Transport and Energy, Arizona State University, Tempe,
Arizona, USA; email: hamed.farivarnejad@asu.edu, spring.berman@asu.edu

Annu. Rev. Control Robot. Auton. Syst. 2022.
5:205–19

First published as a Review in Advance on
November 10, 2021

The *Annual Review of Control, Robotics, and
Autonomous Systems* is online at
control.annualreviews.org

<https://doi.org/10.1146/annurev-control-042920-095844>

Copyright © 2022 by Annual Reviews.
All rights reserved

Keywords

collective transport, cooperative manipulation, multirobot systems,
robotic swarms, centralized control, leader–follower control,
decentralized control

Abstract

One potential application of multirobot systems is collective transport, a task in which multiple robots collaboratively move a payload that is too large or heavy for a single robot. In this review, we highlight a variety of control strategies for collective transport that have been developed over the past three decades. We characterize the problem scenarios that have been addressed in terms of the control objective, the robot platform and its interaction with the payload, and the robots' capabilities and information about the payload and environment. We categorize the control strategies according to whether their sensing, computation, and communication functions are performed by a centralized supervisor or specialized robot or autonomously by the robots. We provide an overview of progress toward control strategies that can be implemented on robots with expanded autonomous functionality in uncertain environments using limited information, and we suggest directions for future work on developing such controllers.

**ANNUAL
REVIEWS CONNECT**

www.annualreviews.org

- Download figures
- Navigate cited references
- Keyword search
- Explore related articles
- Share via email or social media

1. INTRODUCTION

In many applications that are suitable for robotic systems, in that they involve repetitive actions or take place in hazardous or remote locations, an object must be transported to a new location, manipulated into a new configuration, or accelerated to a target velocity. Examples of such applications include construction, manufacturing, assembly in space and underwater, transportation and delivery, search-and-rescue operations, disaster response, mining, and even biomedical applications at the micro/nanoscale (1, 2). When the payload is too large, bulky, or heavy to be moved by a single robot, a group of robots can be deployed to achieve the desired objective by exerting forces on the payload simultaneously or in quick succession, as illustrated in **Figure 1**. This task is described in the literature as transport or manipulation, with the modifiers collective, cooperative, coordinated, collaborative, or group used to indicate that the payload's movement is produced by the efforts of multiple robots. In this review, we refer to the task as collective transport or cooperative manipulation.

Controllers for cooperative object manipulation were first designed in the late 1980s and early 1990s for two or three stationary robotic manipulators with multiple degrees of freedom (DOFs). The accelerated development of mobile robots in the mid-1990s led to research on control of collective transport by groups of mobile robots. The proposed controllers often required reference inputs (such as a target payload location or trajectory) and information about the system parameters and state (such as geometric and inertial properties of the payload and measurements of its position and velocity) that the robots can only obtain from an external observer or a specialized teammate, i.e., a centralized node. These requirements limit the robots' ability to operate autonomously during transport using their own sensor data and computations and enforce their dependence on potential single points of failure.

In this review, we provide an overview of control strategies for collective transport that have been developed over the past three decades in terms of the extent of autonomous functionality that they implement in the robot transporters. The organization of the literature from this

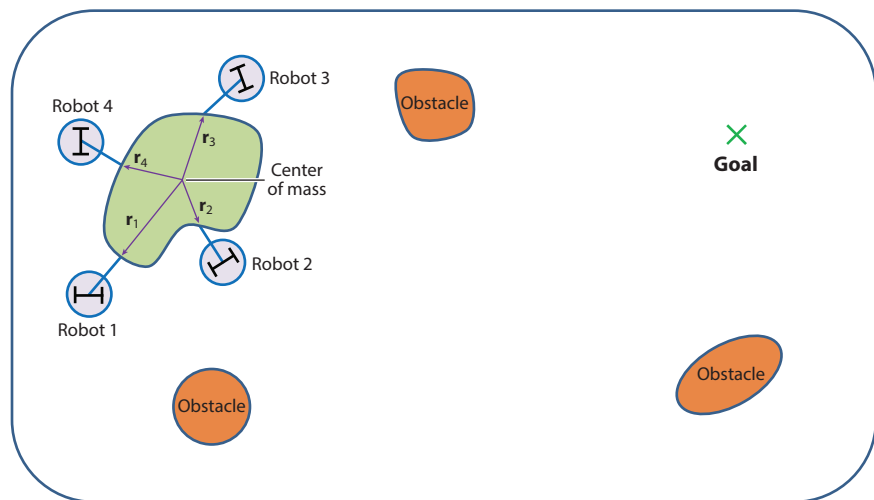


Figure 1

A planar collective transport task performed by four robots in a bounded domain containing obstacles. Each robot is attached to the payload with a one-degree-of-freedom manipulator.

perspective distinguishes this review from previous reviews, which classify collective transport strategies according to the type of controller employed (3) or the interaction mechanisms between the robots and the payload, such as pushing, grasping, and caging (4, 5). In Section 2, we characterize collective transport problems in terms of the control objective, the type of robot platform, kinematic constraints between the robots and the payload, and assumptions about the robots' capabilities and information about the payload and environment. We review control strategies that have been developed to address these problems in Section 3, categorizing the controllers according to the degree to which their sensing, computation, and communication functions are centralized. In Section 4, we discuss the state of the art in work toward controller design for collective transport in uncertain, unstructured environments, which requires more autonomous functionality by the robot transporters. We conclude in Section 5 with potential directions for future research on control strategies for such environments.

2. PROBLEM DESCRIPTION

Controllers for multirobot collective transport have been designed for different problem scenarios, which we characterize here in terms of the control objectives of the transport task, the type of robot platform used in the transport team, the kinematic constraints on the composite robot–payload system, the robots' sensing and communication capabilities, and the robots' information about the payload and the environment.

2.1. Transport Control Objectives

Prior works on control strategies for collective transport have generally focused on achieving one or more of the following objectives. Common primary objectives include stabilizing the payload's configuration and/or velocity to specified reference values (e.g., moving the payload to a target location) and driving these variables to track reference trajectories. Secondary objectives, which enable the robots to complete the primary objectives, include regulating or minimizing the interaction forces between the robots and the payload in order to prevent excessively large forces that could damage the payload or the robots and avoiding collisions with obstacles in partially or fully unknown environments. In the case where the control strategy requires explicit interrobot communication, another secondary objective may be the maintenance of a connected communication network among the robots.

2.2. Type of Robot Platform

Collective transport control strategies have been developed predominantly for nonholonomic wheeled mobile robots, which have nonholonomic constraints between their rotational and translational motion. In some works, the robots move the payload by pushing against it with their mobile bases, while in others, the robots are each equipped with a one-DOF gripper or pincer that they use to grasp the payload. Many works propose controllers for mobile manipulators, which are composed of a mobile base with a multi-DOF manipulator mounted on top. Mobile manipulators are designed to have sufficient redundancy in their DOFs to control the configuration and velocity of the robots and the payload as well as regulate the interaction forces between each robot and the payload. More recently, mobile robots with three or four omnidirectional wheels and a pincer or multi-DOF manipulator have been used for collective transport. Such omnidirectional robots have unconstrained kinematics. In addition to ground robots, collective transport strategies have been designed for aerial robots (6), surface vehicles (7, 8), and underwater robots (9, 10).

2.3. Kinematic Constraints Between the Robots and the Payload

The robots' attachment to the payload introduces kinematic constraints on the motion of the composite robot-payload system. The type of attachment determines the number of DOFs of the entire system and governs the motion of the robots with respect to the payload. Early works on cooperative object manipulation by stationary manipulators typically assumed a rigid grasp between each end effector and the payload, for which the end effector's position and orientation relative to the payload's configuration remain constant. Each attachment of this type eliminates six DOFs from the total number of DOFs of the robot-payload system in its configuration space, and thus the manipulators must be highly redundant in order to perform the task while avoiding deadlock configurations. Given this limitation, researchers considered another type of attachment called a point grasp, for which the end effector's position relative to the payload's center of mass remains constant while its relative orientation about one axis can change; i.e., the end effector is connected by a pin joint at a unique point. This type of attachment is used mostly for planar manipulation tasks rather than for manipulation in three-dimensional space.

To simplify the controller design and analysis, robots performing collective transport are often modeled as point masses with double-integrator dynamics. For robots represented as point masses, a point contact models a rigid attachment of a robot to the payload. In some collective transport control strategies, particularly ones designed for large populations of expendable, interchangeable robots called robotic swarms, the robots repeatedly attach to and detach from the payload, changing the composition of the transport team over time. Due to these transient contacts with the payload, time-invariant kinematic constraints on the robot-payload system cannot be derived.

2.4. Robot Sensing and Communication Capabilities

The robots' onboard sensors and communication devices, as well as any measurements that they can obtain from external instruments, are key specifications in the formulation of collective transport problems. In this section, we summarize common assumptions in prior work about the capabilities of the robots.

Feedback controllers are used to stabilize the position, orientation, translational velocity, and angular velocity of a mobile robot to reference values or trajectories. The time evolution of these state variables is given by the solution of a dynamical model describing the robot's motion, for which several candidates are described in the previous subsection. To execute these controllers, the robot must obtain measurements or estimates of the current values of these variables. One approach is to receive this information from an external localization system, such as GPS or an indoor positioning system. For example, in indoor settings, the robots and payload can be localized by tagging them with identification markers and tracking the markers in real time using an overhead camera and image-processing algorithms. Another approach is for the robots to measure or estimate the variables using their onboard sensors and computational devices. Mobile robots can use odometry sensor measurements (e.g., from wheel encoders) fused with data from inertial measurement units to improve the accuracy of their estimated configuration. Robotic manipulators can use encoders and tachometers to measure their joint angles and joint rates, respectively, in order to determine the position and velocity of their end effector with respect to their base, which is a mobile robot in the case of a mobile manipulator. Moreover, mobile manipulators can measure interaction forces using a force sensor at the robot's attachment point on the payload.

Many collective transport strategies require the robots to explicitly communicate information to one another using a wireless ad hoc network or a central router that establishes connections between the robots. This information often consists of the robots' configurations and velocities, and can include estimates of the payload's state variables and geometric and dynamic parameters

if they are unknown and are needed to implement the robots' feedback control laws. Using communication protocols that are designed to achieve consensus (11), the robots can arrive at a common estimate of the payload's position, velocity, mass, and other properties. Additionally, interrobot communication can be introduced to improve the stability properties of adaptive control strategies for collective transport (12).

2.5. Information About the Payload and Environment

Most works on collective transport assume that the robots have prior information about the dynamics and geometry of the payload or that they obtain this information during transport through sensor measurements or communication. The payload's mass and moment of inertia are commonly assumed to be known to the robots. Many transport strategies that employ centralized control require that all robots know the magnitude and orientation of the vector from the payload's center of mass to the attachment point of each robot on the payload (the vectors $\mathbf{r}_i$ in **Figure 1**), e.g., in order to compute the grasp matrix (13). In works where the control objective is trajectory tracking by the payload, it is common to assume that the robots regularly receive measurements of the position and velocity of the payload's center of mass and the payload's orientation and angular velocity during transport. These measurements are usually transmitted to the robots by a global observer or a leader robot.

Information about the environment, in particular a map of the free space where the transport team can travel, is implicitly assumed in most research on collective transport. In many works, reference trajectories for the configuration and velocity of the robots and/or payload are computed offline by a motion planner, which generates collision-free, reachable trajectories based on prior information about obstacles and inaccessible regions in the environment. In a few works, the transport team includes a leader robot that has this prior information (whereas the other robots do not) and assumes the role of the motion planner. The leader robot is given the reference trajectory offline, or in some cases computes this trajectory online while the transport team moves the payload. The leader explicitly communicates the next waypoint on the trajectory to the follower robots, or it conveys this information through implicit communication, in which the followers estimate the leader's intended motion using their local sensor measurements. A few recent works have considered scenarios in which none of the robots are assigned desired trajectories for the robots or payload, as discussed in Section 4.

3. EXISTING CONTROL APPROACHES

In this section, we review control strategies for collective transport that have been developed for the problem scenarios characterized in Section 2. The control strategies can be broadly classified according to their degree of reliance on a single component of the system for the following functions: acquisition of sensor measurements, computation of control commands based on this sensor feedback, and communication of these commands to the robots' actuators to move the payload. In a given control strategy, each of these functions may be centralized, meaning that it is performed by a single stationary or mobile unit, or decentralized (also called distributed), meaning that each robot performs the function independently using its own onboard resources, possibly incorporating information that is explicitly shared by other robots within its local communication range. Centralized functions may be performed by a supervisory agent (14) that does not physically participate in the transport (i.e., operates externally to the transport team) or by a member of the transport team called a leader robot, which has particular sensing, computation, communication, and/or actuation capabilities that the other team members—the follower robots—lack. In the second case, the control strategy is called a leader-follower controller.

The dependence of a controller on centralized functions reduces its robustness to errors, failures, and disturbances, since a component that performs such a function is a potential single point of failure; its loss would render the entire system inoperative. Decentralized functions introduce redundancy into the system's operation, thereby improving its robustness properties. Moreover, decentralized functions can be performed by robots with local sensing and communication capabilities and are scalable with the number of robots, making them particularly suited to implementation on robotic swarms. These advantages have motivated the development of collective transport controllers with decentralized functions.

The following subsections group existing controllers for collective transport into three categories, depending on whether their sensing, computation, and communication functions are centralized or decentralized. If the three functions are all centralized or all decentralized, then we refer to the controller as fully centralized or fully decentralized, respectively. If at least one of the functions is decentralized and the other(s) are centralized, we refer to the controller as partially decentralized. We note that the robot control laws in the fully decentralized strategies may require a reference input that is provided offline, such as the target payload position or velocity.

3.1. Fully Centralized Controllers

Fully centralized control schemes rely on models of the kinematics and dynamics of the robots and payload and measurements of their configurations and velocities, and possibly the interaction forces between the robots and the payload. A supervisory agent obtains these measurements and uses them to compute control commands, which it then transmits to the robots. The first controllers for cooperative manipulation, developed for stationary robotic manipulators in the late 1980s and early 1990s, were fully centralized. One of the earliest works extended a hybrid position/force controller, originally designed for a single manipulator, to multiple manipulators (15). Feedback linearization via a nonlinear feedback control law, which was motivated by the widely used computed torque method, was frequently applied to obtain decoupled linear closed-loop dynamical models for the robots and the payload (16, 17).

Schneider & Cannon (18) proposed a cooperative manipulation strategy based on impedance control of the payload, in which the manipulators control the payload's motion such that it tracks a specified impedance behavior as it converges to a desired configuration. Multiple impedance control, proposed by Moosavian & Papadopoulos (19), is a modification of this technique that controls the impedance behavior of the manipulators as well as the payload for improved stability properties. Chang et al. (20) presented the augmented object model, an equivalent model for the dynamics of the composite manipulator-object system that inherits the configuration space of the object. A controller that is designed to achieve a desired objective in the augmented object model, such as position regulation, trajectory tracking, or impedance control, will impose the same behavior on the manipulated object. Nikou et al. (21) presented a centralized nonlinear model predictive controller for cooperative manipulation. This controller requires a mathematical model of the kinematics and dynamics of every robot and the robot-payload system, as well as information about the location and geometry of each obstacle in the environment. The energy-optimal controller developed by Verginis & Dimarogonas (22) is based on a centralized strategy that minimizes the internal forces, which are the components of the interaction forces that do not contribute to the payload's motion.

Centralized control approaches have also been proposed for collective transport by robotic swarms. Becker et al. (23) used a single input signal to steer a swarm of robots around an environment and push an object encountered by the swarm to a target configuration. Another example is the controller presented by Shahrokhi et al. (24), where an external observer (a human or a central computer) tracks the mean position and mean velocity of the robots in the swarm and

communicates appropriate control commands to the robots in order to push the payload toward a target location.

3.2. Partially Decentralized Controllers

Leader–follower controllers with decentralized components began to be developed in the late 1990s and early 2000s. Many works delegated certain functions of the central supervisory unit to one or more leader robots, which, unlike the follower robots, may have information about the transport team, the payload, and the environment. Some leader–follower control schemes employ centralized sensing and communication with decentralized computation: The leader acquires data (through its own measurements) on the payload’s position and velocity and transmits this information to the followers, which calculate and execute the control commands using their onboard processors. Other leader–follower strategies use decentralized sensing with centralized computation and communication: Each follower collects data with its onboard sensors and transmits these measurements to the leader, which then calculates the control commands and sends them back to the followers to execute.

One of the earliest leader–follower controllers for collective transport, proposed by Stilwell & Bay (25), does not rely on explicit interrobot communication. In this control strategy, the leader knows the target direction of transport and applies a force to drive the payload in this direction. The followers estimate the leader’s intended direction of motion through force sensor measurements at their points of contact with the payload, stabilize the payload’s rotation, and move it in this direction. Kosuge et al. (26, 27) employed a similar strategy, in which the robot dynamics are modeled by a first-order differential equation under the assumption that each robot’s velocity is controlled with appropriate feedback compensation. Chaimowicz et al. (28) and Sugar & Kumar (29) proposed controllers that maintain prescribed forces at the robots’ attachment points on the payload. The controllers rely on explicit communication between the leader and the followers, and different robots can assume the leadership role during transport; e.g., a follower that detects an obstacle can request leadership in order to avoid it.

The leader–follower strategy used by Wang & Schwager (30, 31) is a consensus-based approach that does not rely on explicit communication between the robots. The leader knows the desired payload trajectory to the goal and can exert a torque on the payload and measure its angular velocity, and the followers use their local measurements of the payload’s motion to reach a consensus on the magnitude and direction of their applied forces. In another work by the same authors (32), the leader—which could be a robot or a human teleoperator or physical teammate—applies a force to move the load over a predefined path, and the followers estimate the direction of the object movement using force measurements at their attachment points and apply forces in this estimated direction to assist the leader. Tsiamis et al. (33) employed a similar strategy, in which the leader achieves a desired trajectory tracking behavior via an impedance control law, and the followers estimate the leader’s intended motion using a prescribed performance estimator and apply a similar impedance control law.

Another approach, presented by Yufka & Ozkan (34), considers the payload to be the leader; the followers (the transporting robots) use a path-planning approach to preserve their initial positions and orientations with respect to the virtual leader (the payload) during the transport. Verginis et al. (35) proposed a decentralized nonlinear model predictive control approach that relies on the leader’s information about the dynamics and geometry of the payload and communication to the followers, and the followers compute their own control inputs. The decentralized impedance controller presented by Carey & Werfel (36) requires the leader to initiate the payload motion by applying a force in the direction of the target position, and does not require explicit communication or information about the physical properties of the payload.

Gabellieri et al. (37) described a control strategy that can utilize multiple leaders and does not rely on explicit communication. This work employed a force regulation scheme at each robot's attachment point on the payload and studied the effect of the number of leaders on the controller performance at stabilizing the payload to a desired configuration.

3.3. Fully Decentralized Controllers

Fully decentralized controllers for collective transport were initially developed in the mid-2000s. One of the earliest works on decentralized control of cooperating robots proposed the application of the augmented object model at each robot's grasp point (38). Dickson et al. (39) presented a decentralized impedance control scheme that avoids the need for a centralized controller—which was required in the work by Schneider & Cannon (18)—by using a decentralized algorithm to estimate external forces on the payload. The decentralized impedance control strategy developed by Pierri et al. (40), which was designed for trajectory tracking by a payload with initially unknown inertial properties, includes an initialization phase in which the robots estimate the inertia tensor of the payload. Liu et al. (41) proposed a decentralized computed torque scheme that requires a dynamical model of each robot and analyzed its efficacy for cases with and without force-sensing capabilities. Krovi and colleagues (42, 43) addressed decentralized kinematic control of cooperative payload manipulation by nonholonomic mobile manipulators.

In many fully decentralized control approaches to collective transport, all robots in the transport team are assumed to have identical hardware and controllers. The decentralized potential-based approach presented by Song & Kumar (44) requires the robots to have information about the payload's position at each time instant. The authors showed that the stability of the proposed method is affected by the robots' configuration around the payload. In the decentralized coordination algorithm proposed by Kennedy et al. (45), the robots use explicit communication with their neighbors to converge to a distribution that minimizes their interaction forces and achieves a desired wrench to move the payload. Fink et al. (46, 47) presented a decentralized control strategy for collective transport without explicit communication in a bounded domain containing circular obstacles. The positions and radii of the obstacles and the equation of the domain boundary are known to the robots, and the controller composes vector fields that guide the robots to approach the payload, surround it, and transport it to a goal location while avoiding interrobot collisions. Chen et al. (48) considered a scenario where the payload is significantly larger than the robots, and the robots push the payload only if it occludes their line of sight to the goal. Habibi et al. (49) presented four algorithms that enable the robots to estimate the centroid of the payload, rotate the payload, and transport it over certain marked points that can be recognized by a guide robot.

Bai & Wen (50, 51) considered the transport of a flexible payload, modeling the reaction force between each robot and the payload as the gradient of a nonlinear potential function that describes the load deformation. In the strategy used by Bais et al. (52), the payload weight is distributed among robots with heterogeneous load-carrying capabilities, and the payload is transported along a desired trajectory. Kalat et al. (53) proposed a decentralized control approach in which each robot coordinates its actions with a virtual teammate located at the robot's mirror position with respect to the payload's center of mass. Rubenstein et al. (54) used an approach that assumes that all the robots know the target direction to the goal, and the robots' applied forces on the payload are calculated from a simple velocity feedback control law.

In the decentralized approach presented by Culbertson & Schwager (55), the robots have a common reference model for the desired payload motion and use an adaptive controller to compensate for the effect of friction on the payload. Adaptive robust control approaches have been recently proposed for planar and three-dimensional cooperative manipulation (12, 56–62). These

approaches combine a stabilizing term with a regression term in the controller in order to achieve stabilization in the presence of parameter uncertainties. They require either prior information about the robots' distribution around the payload or feedback on the payload's motion.

Recently, decentralized learning schemes have also been proposed for cooperative manipulation. Li et al. (63) used a dynamic recurrent neural network to solve a quadratic program, which computes cooperative kinematic controllers for redundant manipulators using partially known information about the payload and the teammates. Ding et al. (64) used reinforcement learning to design two decentralized approaches to cooperative manipulation: one that applies Q-learning with individual reward functions, and one that utilizes game-theoretic techniques. The first approach exhibits more robustness to different reward structures than the second. Zhang et al. (65) applied deep reinforcement learning to a collective transport task in a bounded environment, where two robots must transport a slender payload through a narrow passage in the boundary of the domain.

Some decentralized methods require robots to communicate their measurements to each other in order to estimate unknown parameters of the payload (66, 67). More recently, Dohmann & Hirche (68) proposed an event-triggered communication strategy with distributed impedance control to improve the stability and robustness of cooperative manipulation of unknown payloads in unknown environments. Other approaches do not rely on communication or prior information about the payload's dynamics (69) but require a supervisor to define trajectories beforehand for the robots and the payload (33, 70, 71). The distributed optimization algorithm presented by Shorinwa & Schwager (72) employs explicit interrobot communication to guarantee convergence of the payload's tracking errors to zero and ensure that the robots avoid collisions with obstacles in the environment.

4. CURRENT PROGRESS ON OPEN CHALLENGES

A majority of the control strategies discussed in Section 3 rely on at least one of the following assumptions: predefined trajectories for the payload or robots, explicit interrobot communication, knowledge of the robots' distribution around the payload, and information about the locations, dynamics, and geometry of the robots, the payload, and any obstacles in the domain. While these assumptions may be valid for collective transport applications in known, structured environments, such as automated warehouses and factories, they may not be realistic for applications in uncertain, unstructured environments. For example, debris that the robots are deployed to clear after a disaster, or materials that the robots extract in mines, can constitute both payloads and obstacles with unknown properties. The robots may not have access to a global localization system such as GPS when they transport payloads underwater, underground, and in extraterrestrial environments. Stable multirobot communication networks may be difficult or impossible to maintain due to restricted onboard power and limited communication range and bandwidth.

Applications of collective transport under these conditions motivate the development of new control strategies that can be implemented with minimal prior information, local sensor measurements, and no explicit interrobot communication or global localization. One striking source of inspiration in nature for such control strategies is the behavior of group food retrieval by particular species of ants (73–75). The actions of ants during group retrieval are decentralized, in the sense that they are influenced by locally perceived information as they navigate back to their nest. The ants are able to transport a wide range of food items even though they do not follow predefined trajectories, use explicit communication, or have prior information about the payload, the number and distribution of ants around it, or the locations and geometries of obstacles in the environment (76).

Thus far, efforts have been made toward developing multirobot transport strategies that exhibit this impressive robustness to uncertainty and individual failures and errors. A few works have proposed control strategies for robots with limited information about the payload and the environment. The motion-planning scheme presented by Desai et al. (77) employs a numerical optimization algorithm to produce collective transport by two mobile robots in an environment with static obstacles. The heuristic methodology of Pereira et al. (78) was one of the earliest works on collective transport in unstructured dynamic environments. The centralized kinematics controller proposed by Tanner et al. (79) was one of the first control strategies for collective transport to not require predefined trajectories; moreover, it does not require information about the payload dynamics. The positions and shapes of the obstacles are given to the robots, which apply potential-based control laws that are designed using a novel extension of navigation functions (80) to steer the payload around the obstacles without colliding with them or entering singular configurations.

Berman and colleagues (81, 82) used hybrid dynamical models of collective transport by ants, developed from experimental observations, to derive decentralized control policies for robots in obstacle-free environments. These robot controllers, as well as the controller described by Kube & Bonabeau (83), mimic the attachment–detachment behavior observed in ants, rely only on local sensor information, and do not require prior information about the payload. The decentralized controllers described in other papers by Berman and colleagues (84–86) address position and velocity control of the payload in obstacle-free environments without predefined trajectories or information about the payload geometry or dynamics. Bechlioulis & Kyriakopoulos (87) presented a leader–follower control strategy in which the leader knows the desired payload pose and the positions and shapes of obstacles in the environment. Following the gradient of a navigation function (80), the leader steers the payload around the obstacles while the followers estimate the leader’s intended trajectory for the payload via prescribed performance estimation laws.

5. CONCLUSION

In this review, we have formulated problem scenarios for collective transport by multirobot systems that have commonly been addressed in the literature, and we have categorized different approaches to these problems according to the degree to which they rely on sensor information and control commands from a single centralized component. We have also discussed progress on the open challenge of developing controllers for collective transport that can be implemented on robots with limited information in uncertain environments. We conclude here with suggestions on how to approach the development of controllers for collective transport in problem scenarios that still present unsolved challenges.

It remains an open problem to design fully decentralized control strategies for collective transport in environments that contain obstacles with unknown positions and geometries where robots lack global position information and have limited onboard resources. For robots with identical capabilities and information, a possible first step is to model the robots as point masses with double-integrator dynamics, since the simplicity of the resulting dynamical model of the composite payload–robot system facilitates the controller design and analysis. A controller can first be formulated for collective transport in a bounded convex domain that contains unknown convex obstacles. The controller can be based on obstacle avoidance control schemes that require limited information about the obstacles, such as the optimization method presented by Arslan & Koditschek (88) and controllers based on navigation-like functions described by Farivarnejad (89). The main challenge in applying these methods is to derive conditions that guarantee collision avoidance and the absence of locally stable equilibrium points (local minima) that could trap the transport team.

These works do not address the elimination of local minima in domains that have a nonconvex boundary and/or contain nonconvex obstacles. A possible starting point to do so is to design a controller for a single robot in this scenario by redesigning a controller from Arslan & Koditschek (88) or Farivarnejad (89) or applying the closed-form approach for moving obstacles presented by Huber et al. (90), and then adapting the controller to collective transport tasks. Other candidate approaches include the use of deep learning and reinforcement learning algorithms or the techniques of regular extremum seeking (91) and stochastic extremum seeking (92). Controllers for point-mass robots can be extended to be implementable on mobile manipulators, whose redundancy can be utilized to achieve secondary control objectives. Such objectives can include the regulation of interaction forces between the robots and the payload; the minimization of internal forces within the payload, which do not contribute to the payload's motion and could be large enough to break it; and the resolution of deadlocks if the transport team becomes stuck between obstacles.

DISCLOSURE STATEMENT

The authors are not aware of any affiliations, memberships, funding, or financial holdings that might be perceived as affecting the objectivity of this review.

ACKNOWLEDGMENTS

This work was supported by the Arizona State University Global Security Initiative.

LITERATURE CITED

1. Christensen HI, ed. 2020. *A roadmap for US robotics: from internet to robotics*. Tech. Rep., Comput. Comm. Consort. and Univ. Calif., San Diego. <http://www.hichristensen.com/pdf/roadmap-2020.pdf>
2. Schranz M, Umlauf M, Sende M, Elmenreich W. 2020. Swarm robotic behaviors and current applications. *Front. Robot. AI* 7:36
3. Caccavale F, Uchiyama M. 2016. Cooperative manipulation. In *Springer Handbook of Robotics*, ed. B Siciliano, O Khatib, pp. 989–1006. Cham, Switz.: Springer
4. Parker L. 2015. Collective manipulation and construction. In *Springer Handbook of Computational Intelligence*, ed. J Kacprzyk, W Pedrycz, pp. 1395–406. Berlin: Springer
5. Tuci E, Alkilabi MH, Akanyeti O. 2018. Cooperative object transport in multi-robot systems: a review of the state-of-the-art. *Front. Robot. AI* 5:59
6. Chung SJ, Paranjape AA, Dames P, Shen S, Kumar V. 2018. A survey on aerial swarm robotics. *IEEE Trans. Robot.* 34:837–55
7. Esposito JM. 2010. Decentralized cooperative manipulation with a swarm of mobile robots: the approach problem. In *2010 American Control Conference (ACC)*, pp. 4762–67. Piscataway, NJ: IEEE
8. Esposito J, Feemster M, Smith E. 2008. Cooperative manipulation on the water using a swarm of autonomous tugboats. In *2008 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 1501–6. Piscataway, NJ: IEEE
9. Heshmati-alamdari S, Karras GC, Kyriakopoulos KJ. 2021. A predictive control approach for cooperative transportation by multiple underwater vehicle manipulator systems. *IEEE Trans. Control Syst. Technol.* In press. <https://doi.org/10.1109/TCST.2021.3085121>
10. Heshmati-alamdari S, Bechlioulis CP, Karras GC, Kyriakopoulos KJ. 2020. Cooperative impedance control for multiple underwater vehicle manipulator systems under lean communication. *IEEE J. Ocean. Eng.* 46:447–65
11. Ren W, Beard RW. 2008. *Distributed Consensus in Multi-Vehicle Cooperative Control: Theory and Applications*. London: Springer
12. Marino A. 2017. Distributed adaptive control of networked cooperative mobile manipulators. *IEEE Trans. Control Syst. Technol.* 26:1646–60

13. Murray RM, Li Z, Sastry SS. 2017. *A Mathematical Introduction to Robotic Manipulation*. Boca Raton, FL: CRC
14. Michael N, Fink J, Loizou S, Kumar V. 2010. Architecture, abstractions, and algorithms for controlling large teams of robots: experimental testbed and results. In *Robotics Research: The 13th International Symposium ISRR*, ed. M Kaneko, Y Nakamura, pp. 409–19. Berlin: Springer
15. Hayati S. 1986. Hybrid position/force control of multi-arm cooperating robots. In *1986 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 3, pp. 82–89. Piscataway, NJ: IEEE
16. Tarn T, Bejczy A, Yun X. 1986. Coordinated control of two robot arms. In *1986 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 3, pp. 1193–202. Piscataway, NJ: IEEE
17. Yun X, Kumar V. 1991. An approach to simultaneous control of trajectory and interaction forces in dual-arm configurations. *IEEE Trans. Robot. Autom.* 7:618–25
18. Schneider S, Cannon R. 1992. Object impedance control for cooperative manipulation: theory and experimental results. *IEEE Trans. Robot. Autom.* 8:383–94
19. Moosavian S, Papadopoulos E. 1997. On the control of space free-flyers using multiple impedance control. In *1997 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 1, pp. 853–58. Piscataway, NJ: IEEE
20. Chang K, Holmberg R, Khatib O. 2000. The augmented object model: cooperative manipulation and parallel mechanism dynamics. In *2000 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 470–75. Piscataway, NJ: IEEE
21. Nikou A, Verginis C, Heshmati-alamdari S, Dimarogonas DV. 2017. A Nonlinear Model Predictive Control scheme for cooperative manipulation with singularity and collision avoidance. In *2017 25th Mediterranean Conference on Control and Automation (MED)*, pp. 707–12. Piscataway, NJ: IEEE
22. Verginis CK, Dimarogonas DV. 2020. Energy-optimal cooperative manipulation via provable internal-force regulation. In *2020 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 9859–65. Piscataway, NJ: IEEE
23. Becker A, Habibi G, Werfel J, Rubenstein M, McLurkin J. 2013. Massive uniform manipulation: controlling large populations of simple robots with a common input signal. In *2013 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 520–27. Piscataway, NJ: IEEE
24. Shahrokhi S, Lin L, Ertel C, Wan M, Becker AT. 2018. Steering a swarm of particles using global inputs and swarm statistics. *IEEE Trans. Robot.* 34:207–19
25. Stilwell D, Bay J. 1993. Toward the development of a material transport system using swarms of ant-like robots. In *1993 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 1, pp. 766–71. Piscataway, NJ: IEEE
26. Kosuge K, Oosumi T, Chiba K. 1997. Load sharing of decentralized-controlled multiple mobile robots handling a single object. In *1997 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 4, pp. 3373–78. Piscataway, NJ: IEEE
27. Kosuge K, Hirata Y, Asama H, Kaetsu H, Kawabata K. 1999. Motion control of multiple autonomous mobile robots handling a large object in coordination. In *1999 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 4, pp. 2666–73. Piscataway, NJ: IEEE
28. Chaimowicz L, Sugar T, Kumar V, Campos M. 2001. An architecture for tightly coupled multi-robot cooperation. In *2001 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 3, pp. 2992–97. Piscataway, NJ: IEEE
29. Sugar T, Kumar V. 2002. Control of cooperating mobile manipulators. *IEEE Trans. Robot. Autom.* 18:94–103
30. Wang Z, Schwager M. 2016. Multi-robot manipulation without communication. In *Distributed Autonomous Robotic Systems: The 12th International Symposium*, ed. NY Chong, YJ Cho, pp. 135–49. Tokyo: Springer
31. Wang Z, Schwager M. 2015. Multi-robot manipulation with no communication using only local measurements. In *2015 54th IEEE Conference on Decision and Control (CDC)*, pp. 380–85. Piscataway, NJ: IEEE
32. Wang Z, Schwager M. 2016. Kinematic multi-robot manipulation with no communication using force feedback. In *2016 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 427–32. Piscataway, NJ: IEEE

33. Tsiamis A, Verginis CK, Bechlioulis CP, Kyriakopoulos KJ. 2015. Cooperative manipulation exploiting only implicit communication. In *2015 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 864–69. Piscataway, NJ: IEEE
34. Yufka A, Ozkan M. 2015. Formation-based control scheme for cooperative transportation by multiple mobile robots. *Int. J. Adv. Robot. Syst.* 12. <https://doi.org/10.5772/60972>
35. Verginis CK, Nikou A, Dimarogonas DV. 2018. Communication-based decentralized cooperative object transportation using nonlinear model predictive control. In *2018 European Control Conference (ECC)*, pp. 733–38. Piscataway, NJ: IEEE
36. Carey NE, Werfel J. 2021. Collective transport of unconstrained objects via implicit coordination and adaptive compliance. In *2021 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 12603–9. Piscataway, NJ: IEEE
37. Gabellieri C, Tognon M, Sanalidro D, Pallottino L, Franchi A. 2020. A study on force-based collaboration in swarms. *Swarm Intell.* 14:57–82
38. Khatib O, Yokoi K, Chang K, Ruspini D, Holmberg R, Casal A. 1996. Coordination and decentralized cooperation of multiple mobile manipulators. *J. Robot. Syst.* 13:755–64
39. Dickson W, Cannon R, Rock S. 1997. A decentralized object impedance controller for object/robot-team systems: theory and experiments. In *1997 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 4, pp. 3589–96. Piscataway, NJ: IEEE
40. Pierri F, Nigro M, Muscio G, Caccavale F. 2020. Cooperative manipulation of an unknown object via omnidirectional unmanned aerial vehicles. *J. Intell. Robot. Syst.* 100:1635–49
41. Liu YH, Arimoto S, Ogasawara T. 1996. Decentralized cooperation control: non-communication object handling. In *1996 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 3, pp. 2414–19. Piscataway, NJ: IEEE
42. Tang CP, Bhatt R, Abou-Samah M, Krovı V. 2006. Screw-theoretic analysis framework for cooperative payload transport by mobile manipulator collectives. *IEEE/ASME Trans. Mechatron.* 11:169–78
43. Abou-Samah M, Tang CP, Bhatt RM, Krovı V. 2006. A kinematically compatible framework for cooperative payload transport by nonholonomic mobile manipulators. *Auton. Robots* 21:227–42
44. Song P, Kumar V. 2002. A potential field based approach to multi-robot manipulation. In *2002 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 2, pp. 1217–22. Piscataway, NJ: IEEE
45. Kennedy MD III, Guerrero L, Kumar V. 2015. Decentralized algorithm for force distribution with applications to cooperative transport. In *Proceedings of the ASME 2015 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*, Vol. 5C: 39th Mechanisms and Robotics Conference, pap. V05CT08A013. New York: Am. Soc. Mech. Eng.
46. Fink J, Michael N, Kumar V. 2008. Composition of vector fields for multi-robot manipulation via caging. In *Robotics: Science and Systems III*, ed. W Burgard, O Brock, C Stachniss, pp. 25–32. Cambridge, MA: MIT Press
47. Fink J, Hsieh MA, Kumar V. 2008. Multi-robot manipulation via caging in environments with obstacles. In *2008 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 1471–76. Piscataway, NJ: IEEE
48. Chen J, Gauci M, Li W, Kolling A, Groß R. 2015. Occlusion-based cooperative transport with a swarm of miniature mobile robots. *IEEE Trans. Robot.* 31:307–21
49. Habibi G, Zachary K, Xie W, Jellins M, McLurkin J. 2015. Distributed centroid estimation and motion controllers for collective transport by multi-robot systems. In *2015 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 1282–88. Piscataway, NJ: IEEE
50. Bai H, Wen JT. 2009. Motion coordination through cooperative payload transport. In *2009 American Control Conference (ACC)*, pp. 1310–15. Piscataway, NJ: IEEE
51. Bai H, Wen JT. 2010. Cooperative load transport: a formation-control perspective. *IEEE Trans. Robot.* 26:742–50
52. Bais AZ, Erhart S, Zaccarian L, Hirche S. 2015. Dynamic load distribution in cooperative manipulation tasks. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 2380–85. Piscataway, NJ: IEEE
53. Kalat ST, Faal SG, Onal CD. 2018. A decentralized, communication-free force distribution method with application to collective object manipulation. *J. Dyn. Syst. Meas. Control* 140:091012

54. Rubenstein M, Cabrera A, Werfel J, Habibi G, McLurkin J, Nagpal R. 2013. Collective transport of complex objects by simple robots: theory and experiments. In *Proceedings of the 2013 International Conference on Autonomous Agents and Multi-Agent Systems*, pp. 47–54. Richland, SC: Int. Found. Auton. Agents Multiagent Syst.
55. Culbertson P, Schwager M. 2018. Decentralized adaptive control for collaborative manipulation. In *2018 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 278–85. Piscataway, NJ: IEEE
56. Kim S, Seo H, Shin J, Kim HJ. 2018. Cooperative aerial manipulation using multirotors with multi-DOF robotic arms. *IEEE/ASME Trans. Mechatron.* 23:702–13
57. Lee H, Kim H, Kim W, Kim HJ. 2018. An integrated framework for cooperative aerial manipulators in unknown environments. *IEEE Robot. Autom. Lett.* 3:2307–14
58. Sadati N, Ghaffarkhah A. 2007. Decentralized position and force control of nonredundant multi-manipulator systems. In *2007 International Conference on Control, Automation and Systems*, pp. 2223–29. Piscataway, NJ: IEEE
59. Dai GB, Liu YC. 2017. Distributed coordination and cooperation control for networked mobile manipulators. *IEEE Trans. Ind. Electron.* 64:5065–74
60. Lee H, Kim H, Kim HJ. 2016. Planning and control for collision-free cooperative aerial transportation. *IEEE Trans. Autom. Sci. Eng.* 15:189–201
61. Pliego-Jimenez J, Arteaga-Perez M. 2017. On the adaptive control of cooperative robots with time-varying holonomic constraints. *Int. J. Adapt. Control Signal Process.* 31:1217–31
62. Verginis CK, Mastellaro M, Dimarogonas DV. 2020. Robust cooperative manipulation without force/torque measurements: control design and experiments. *IEEE Trans. Control Syst. Technol.* 28:713–29
63. Li X, Xu Z, Li S, Wu H, Zhou X. 2020. Cooperative kinematic control for multiple redundant manipulators under partially known information using recurrent neural network. *IEEE Access* 8:40029–38
64. Ding G, Koh JJ, Merckaert K, Vanderborght B, Nicotra MM, et al. 2020. Distributed reinforcement learning for cooperative multi-robot object manipulation. In *Proceedings of the 19th International Conference on Autonomous Agents and Multi-Agent Systems*, pp. 1831–33. Richland, SC: Int. Found. Auton. Agents Multiagent Syst.
65. Zhang L, Sun Y, Barth A, Ma O. 2020. Decentralized control of multi-robot system in cooperative object transportation using deep reinforcement learning. *IEEE Access* 8:184109–119
66. Franchi A, Pettiti A, Rizzo A. 2014. Distributed estimation of the inertial parameters of an unknown load via multi-robot manipulation. In *2014 IEEE Conference on Decision and Control (CDC)*, pp. 6111–16. Piscataway, NJ: IEEE
67. Marino A, Muscio G, Pierri F. 2017. Distributed cooperative object parameter estimation and manipulation without explicit communication. In *2017 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 2110–16. Piscataway, NJ: IEEE
68. Dohmann PBG, Hirche S. 2020. Distributed control for cooperative manipulation with event-triggered communication. *IEEE Trans. Robot.* 36:1038–52
69. Marino A, Pierri F. 2018. A two stage approach for distributed cooperative manipulation of an unknown object without explicit communication and unknown number of robots. *Robot. Auton. Syst.* 103:122–33
70. Gueaieb W, Karray F, Al-Sharhan S. 2003. A robust adaptive fuzzy position/force control scheme for cooperative manipulators. *IEEE Trans. Control Syst. Technol.* 11:516–28
71. Li Z, Yang C, Su CY, Deng S, Sun F, Zhang W. 2015. Decentralized fuzzy control of multiple cooperating robotic manipulators with impedance interaction. *IEEE Trans. Fuzzy Syst.* 23:1044–56
72. Shorinwa O, Schwager M. 2020. Scalable collaborative manipulation with distributed trajectory planning. In *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 9108–15. Piscataway, NJ: IEEE
73. Czaczkes TJ, Ratnieks FL. 2013. Cooperative transport in ants (Hymenoptera: Formicidae) and elsewhere. *Myrmecol. News* 18:1–11
74. McCreery HF, Breed M. 2014. Cooperative transport in ants: a review of proximate mechanisms. *Insectes Sociaux* 61:99–110
75. Feinerman O, Pinkoviezky I, Gelblum A, Fonio E, Gov NS. 2018. The physics of cooperative transport in groups of ants. *Nat. Phys.* 14:683–93

76. Medina O, Hacoheh S, Shvalb N. 2020. Robotic swarm motion planning for load carrying and manipulating. *IEEE Access* 8:53141–50
77. Desai J, Wang CC, Zefran M, Kumar V. 1996. Motion planning for multiple mobile manipulators. In *1996 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 3, pp. 2073–78. Piscataway, NJ: IEEE
78. Pereira G, Pimentel B, Chaimowicz L, Campos M. 2002. Coordination of multiple mobile robots in an object carrying task using implicit communication. In *2002 IEEE International Conference on Robotics and Automation (ICRA)*, Vol. 1, pp. 281–86. Piscataway, NJ: IEEE
79. Tanner H, Loizou S, Kyriakopoulos K. 2003. Nonholonomic navigation and control of cooperating mobile manipulators. *IEEE Trans. Robot. Autom.* 19:53–64
80. Rimón E, Koditschek DE. 1992. Exact robot navigation using artificial potential functions. *IEEE Trans. Robot. Autom.* 8:501–18
81. Berman S, Lindsey Q, Sakar M, Kumar V, Pratt S. 2011. Study of group food retrieval by ants as a model for multi-robot collective transport strategies. In *Robotics: Science and Systems VI*, ed. Y Matsuoka, H Durrant-Whyte, J Neira, pp. 259–66. Cambridge, MA: MIT Press
82. Wilson S, Pavlic TP, Kumar GP, Buffin A, Pratt SC, Berman S. 2014. Design of ant-inspired stochastic control policies for collective transport by robotic swarms. *Swarm Intell.* 8:303–27
83. Kube CR, Bonabeau E. 2000. Cooperative transport by ants and robots. *Robot. Auton. Syst.* 30:85–101
84. Farivarnejad H, Wilson S, Berman S. 2016. Decentralized sliding mode control for autonomous collective transport by multi-robot systems. In *2016 IEEE Conference on Decision and Control (CDC)*, pp. 1826–33. Piscataway, NJ: IEEE
85. Farivarnejad H, Berman S. 2018. Stability and convergence analysis of a decentralized proportional-integral control strategy for collective transport. In *2018 American Control Conference (ACC)*, pp. 2794–801. Piscataway, NJ: IEEE
86. Farivarnejad H, Berman S. 2020. Decentralized PD control for multi-robot collective transport to a target location using minimal information. In *Unmanned Systems Technology XXII*, ed. HG Nguyen, PL Muench, CM Shoemaker, pap. 1142506. Bellingham, WA: SPIE
87. Bechlioulis CP, Kyriakopoulos KJ. 2018. Collaborative multi-robot transportation in obstacle-cluttered environments via implicit communication. *Front. Robot. AI* 5:90
88. Arslan O, Koditschek DE. 2019. Sensor-based reactive navigation in unknown convex sphere worlds. *Int. J. Robot. Res.* 38:196–223
89. Farivarnejad H. 2020. *Decentralized control of collective transport by multi-robot systems with minimal information*. PhD Thesis, Ariz. State Univ., Tempe
90. Huber L, Billard A, Slotine JJ. 2019. Avoidance of convex and concave obstacles with convergence ensured through contraction. *IEEE Robot. Autom. Lett.* 4:1462–69
91. Krstić M, Wang HH. 2000. Stability of extremum seeking feedback for general nonlinear dynamic systems. *Automatica* 36:595–601
92. Stankovic MS, Stipanovic DM. 2009. Stochastic extremum seeking with applications to mobile sensor networks. In *2009 American Control Conference (ACC)*, pp. 5622–27. Piscataway, NJ: IEEE



Contents

An Historical Perspective on the Control of Robotic Manipulators <i>Mark W. Spong</i>	1
Cognitive Science as a Source of Forward and Inverse Models of Human Decisions for Robotics and Control <i>Mark K. Ho and Thomas L. Griffiths</i>	33
Internal Models in Control, Bioengineering, and Neuroscience <i>Michelangelo Bin, Jie Huang, Alberto Isidori, Lorenzo Marconi, Matteo Mischianti, and Eduardo Sontag</i>	55
Behavior Trees in Robot Control Systems <i>Petter Ögren and Christopher I. Sprague</i>	81
Methods for Robot Behavior Adaptation for Cognitive Neurorehabilitation <i>Alyssa Kubota and Laurel D. Riek</i>	109
Grappling Spacecraft <i>Carl Glen Henshaw, Samantha Glassner, Bo Naasz, and Brian Roberts</i>	137
Design and Control of Drones <i>Mark W. Mueller, Seung Jae Lee, and Raffaello D'Andrea</i>	161
Contact and Physical Interaction <i>Neville Hogan</i>	179
Multirobot Control Strategies for Collective Transport <i>Hamed Farivarnejad and Spring Berman</i>	205
Observer Design for Nonlinear Systems with Equivariance <i>Robert Mabony, Pieter van Goor, and Tarek Hamel</i>	221
Partially Observable Markov Decision Processes and Robotics <i>Hanna Kurniawati</i>	253
Increasingly Intelligent Micromachines <i>Tian-Yun Huang, Hongri Gu, and Bradley J. Nelson</i>	279
Magnetic Micro- and Nanoagents for Monitoring Enzymatic Activity In Vivo <i>Michael G. Christiansen, Matej Vizovišek, and Simone Schuerle</i>	311

From Theoretical Work to Clinical Translation: Progress in Concentric Tube Robots <i>Zisis Mitros, S.M. Hadi Sadati, Ross Henry, Lyndon Da Cruz, and Christos Bergeles</i>	335
Medical Robotics: Opportunities in China <i>Yao Guo, Weidong Chen, Jie Zhao, and Guang-Zhong Yang</i>	361
Probabilistic Model Checking and Autonomy <i>Marta Kwiatkowska, Gethin Norman, and David Parker</i>	385
Safe Learning in Robotics: From Learning-Based Control to Safe Reinforcement Learning <i>Lukas Brunke, Melissa Greeff, Adam W. Hall, Zhaocong Yuan, Siqi Zhou, Jacopo Panerati, and Angela P. Schoellig</i>	411
Secure Networked Control Systems <i>Henrik Sandberg, Vijay Gupta, and Karl H. Johansson</i>	445
Energy-Aware Controllability of Complex Networks <i>Giacomo Baggio, Fabio Pasqualetti, and Sandro Zampieri</i>	465
Control of Microparticle Assembly <i>Xun Tang and Martha A. Grover</i>	491
Stimuli-Responsive Polymers for Soft Robotics <i>Yusen Zhao, Mutian Hua, Yichen Yan, Shuwang Wu, Yousif Alsaïd, and Ximin He</i>	515
Control of the Stefan System and Applications: A Tutorial <i>Shumon Koga and Miroslav Krstic</i>	547
Turbulence and Control of Wind Farms <i>Carl R. Shapiro, Genevieve M. Starke, and Dennice F. Gayme</i>	579
Autonomous Airborne Wind Energy Systems: Accomplishments and Challenges <i>Lorenzo Fagiano, Manfred Quack, Florian Bauer, Lode Cernel, and Espen Oland</i>	603
Analysis and Control of Autonomous Mobility-on-Demand Systems <i>Gioele Zardini, Nicolas Lanzetti, Marco Pavone, and Emilio Frazzoli</i>	633
Control as an Enabler for Electrified Mobility <i>Andrew G. Alleyne and Christopher T. Aksland</i>	659
Stability and Control of Power Grids <i>Tao Liu, Yue Song, Lipeng Zhu, and David J. Hill</i>	689

Errata

An online log of corrections to *Annual Review of Control, Robotics, and Autonomous Systems* articles may be found at <http://www.annualreviews.org/errata/control>