

# Nonlinear multimode photonics: nonlinear optics with many degrees of freedom

LOGAN G. WRIGHT,<sup>1,2,\*</sup> WILLIAM H. RENNINGER,<sup>3</sup> DEMETRI N. CHRISTODOULIDES,<sup>4</sup> AND FRANK W. WISE<sup>2,5</sup>

<sup>1</sup>Physics & Informatics Laboratories, NTT Research, Inc., 940 Stewart Drive, Sunnyvale, California 94085, USA

<sup>2</sup>School of Applied and Engineering Physics, Cornell University, Ithaca, New York 14853, USA

<sup>3</sup>Institute of Optics, University of Rochester, Rochester, New York 14627, USA

<sup>4</sup>CREOL/College of Optics and Photonics, University of Central Florida, Orlando, Florida 32816, USA

<sup>5</sup>e-mail: frank.wise@cornell.edu

\*Corresponding author: lgw32@cornell.edu

Received 21 April 2022; revised 14 June 2022; accepted 15 June 2022; published 19 July 2022

The overall goal of photonics research is to understand and control light in new and richer ways to facilitate new and richer applications. Many major developments to this end have relied on nonlinear optical techniques, such as lasing, mode-locking, and parametric downconversion, to enable applications based on the interactions of coherent light with matter. These processes often involve nonlinear interactions between photonic and material degrees of freedom spanning multiple spatiotemporal scales. While great progress has been made with relatively simple optimizations, such as maximizing single-mode coherence or peak intensity alone, the ultimate achievement of coherent light engineering is complete, multidimensional control of light–light and light–matter interactions through tailored construction of complex optical fields and systems that exploit all of light’s degrees of freedom. This capability is now within sight, due to advances in telecommunications, computing, algorithms, and modeling. Control of highly multimode optical fields and processes also facilitates quantitative and qualitative advances in optical imaging, sensing, communication, and information processing since these applications directly depend on our ability to detect, encode, and manipulate information in as many optical degrees of freedom as possible. Today, these applications are increasingly being enhanced or enabled by both multimode engineering and nonlinearity. Here, we provide a brief overview of multimode nonlinear photonics, focusing primarily on spatiotemporal nonlinear wave propagation and, in particular, on promising future directions and routes to applications. We conclude with an overview of emerging processes and methodologies that will enable complex, coherent nonlinear photonic devices with many degrees of freedom. © 2022 Optica Publishing Group under the terms of the [Optica Open Access Publishing Agreement](#)

<https://doi.org/10.1364/OPTICA.461981>

## 1. INTRODUCTION

Future advances enabled by nonlinear optics will probably be increasingly due to devices whose underlying physics and design involve many degrees of freedom (DOFs), i.e., many photonic DOFs, such as spatial modes, frequencies, and polarizations, and many design parameters, such as the space- and time-dependent distributions of refractive index and loss/gain in photonic structures. This is an easy prediction to make: as photonics researchers, we are part of a tradition that has always sought to control light in more, and more intricate, ways. Increasingly urgent open questions for nonlinear optical science and engineering, thus, include: When and how can nonlinear photonic devices benefit from more modes? What new capabilities and applications await discovery and invention in the domain of nonlinear optical physics and design with many DOFs?

Control of light with many spatial modes, so-called structured light, has advanced over the past decade, driving progress in optical

particle manipulation and imaging [1–3]. Manipulating light in time and frequency domains is also mature and is the domain in which nonlinear techniques, such as mode-locking [4–12] and supercontinuum generation [13–17], have so far played the most crucial role. In comparison, spatiotemporal light control has lagged behind. Why? One reason for this is that simulation of spatiotemporal nonlinear wave propagation is much harder than purely spatial (2 + 1-dimensional) or purely temporal (1 + 1-dimensional) wave propagation; simulation complexity generally scales exponentially with the number of dimensions. A second reason is that conceptual tools, like modes or solitons, and experimental tools, like pulse/wavefront shaping, are more challenging to apply in general spatiotemporal wave settings. Nonetheless, initial steps ranging from extreme-intensity laser accelerators [18–21] to sources of entangled states [22–29] show that motivation and progress are present here too.

Here we present an overview of emerging applications and platforms for *multimode nonlinear photonics*, as well as emerging

methodologies to address the scientific and engineering challenge of multimode nonlinear optical design. Although our scope is multimode nonlinear photonics generally, this paper places an emphasis on spatiotemporal physics and devices because these represent the ultimate control over light, because they remain immature compared to control in pure-time or pure-space domains, and because this is the domain closest to the authors' collective expertise. Our perspective here is meant to be primarily an engineering-oriented one, since the physics of multimode and spatiotemporal nonlinear optical systems have been reviewed elsewhere [30–33], and because we believe the time is right to begin developing applications, both by judicious engineering based on existing laboratory platforms and by development of new, engineering-friendly platforms for applications of multimode nonlinear optical physics.

### The era of multimode photonics has already begun.

Although the development of nonlinear photonics has been driven by many causes, here we consider several representative slices of the field's history—optical telecommunications, imaging, and spectroscopy, and their coupling to advanced nonlinear photonic light sources (Fig. 1). In the past, single-mode structures like fibers and cavities enabled light sources with unprecedented coherence and peak intensity, facilitating new applications. Now, the trend is toward systems that utilize richer, multimode forms of coherent light to improve on applications of single-mode light, as well as to facilitate qualitatively new capabilities and applications.

The terminology “mode” has a varied usage throughout photonics literature [65] and is even more challenging to specify in nonlinear and strongly dissipative settings. For the purposes of this article, we can loosely define “modes” as distinct dimensions or DOF of light, usually in the form of spatial or spatiotemporal eigenfunctions of a relevant linearized system description.


Optical telecommunications has driven the development and refinement of many optical devices—fibers, lasers, amplifiers, modulators, filters, and measurement devices—that have enabled a much wider range of research and smaller-market applications. Nonlinear fiber optics [66] and fiber lasers [67,68], as well as their applications in imaging or manufacturing, are two well-known examples, but nearly every experimental photonics paper published today uses some equipment that was developed

or enhanced for optical telecommunications. Trends in optical telecommunications, thus, foreshadow the future of nonlinear photonic devices. Today, optical communications is increasingly pressed against the limits of single-mode devices. State-of-the-art research systems now overwhelmingly rely on multimode optics to increase information capacity [34,69,70]. It is difficult to predict exactly when and how multimode telecommunications will impact commercial systems. Nonetheless, it is not difficult to expect that multimode nonlinear photonic devices will benefit from these advances, regardless of how and when multimode optical telecommunications reaches its tipping point.


Optical imaging and spectroscopy are ancient optical applications that have expanded and refined as new light sources have become available. Initially, both relied on incoherent light. While incoherent versions remain important, these techniques were enhanced by the introduction of coherent single-mode laser light, and then further by forms of multimode coherent light, as in mode-locked lasers. To push beyond the limits of linear imaging and spectroscopy, new techniques increasingly capitalize on high-intensity or quantum-correlated light [35,36]. Major advances have arisen from structured coherent light in space, as in stimulated-emission-depletion (STED) microscopy [37], structured illumination microscopy [38,39], and light-sheet imaging [40], or in time, as in multiphoton [41] or stimulated Raman imaging [42,43]. Whereas trends in light source development have recently followed telecommunication developments, the trend with imaging and spectroscopy has been more diverse. The laser and stabilized frequency comb were developed with spectroscopic motivations [44], and early laser workers envisioned many other applications, such as in surgery [45]. But most techniques enabled by nonlinear optical light sources were not anticipated by their inventors and were instead invented by others, many years after the requisite light source capabilities were first introduced.

**If properly designed and controlled, devices and processes based on multimode optical physics offer significant advantages over single-mode approaches.**

The motivation for harnessing multimode coherent light is now fairly obvious: In concrete situations we know of, process or device performance is expected to grow linearly, and perhaps superlinearly, with the number of controlled modes. In

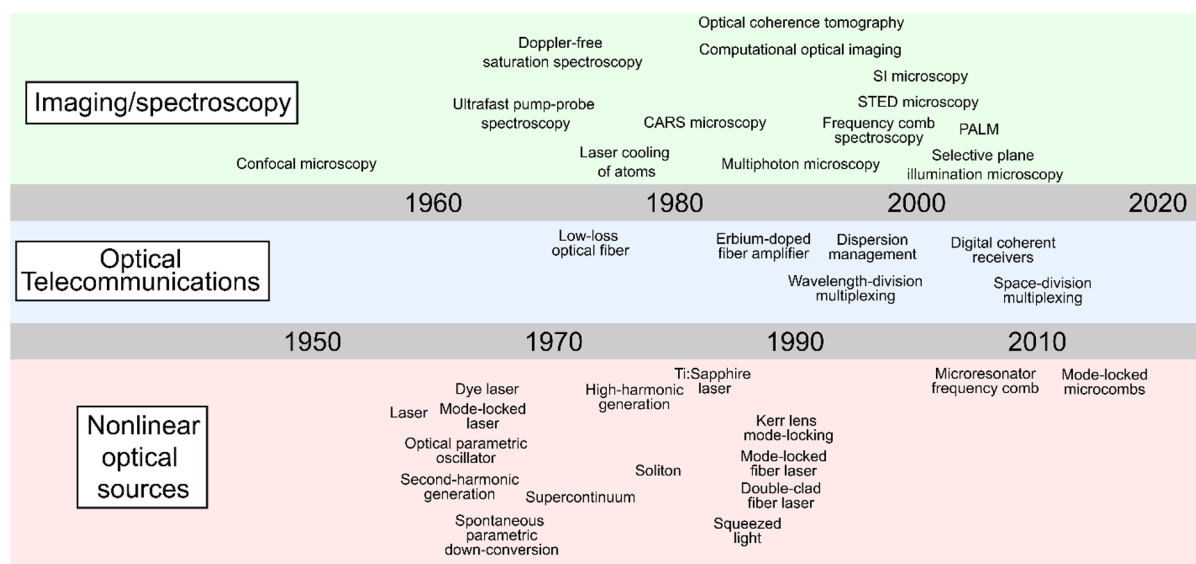

**Fig. 1.** Timeline of major developments in optical imaging and spectroscopy, optical telecommunications, and nonlinear optical light sources [34–64].

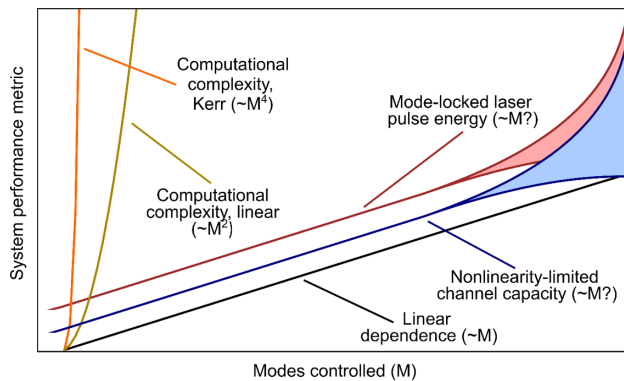

**Fig. 2.** Scaling of various photonic system performance metrics with the number of controlled modes ( $M$ ). Communication capacity and laser pulse energy nominally scale linearly with modes, while the computational complexity—an upper bound for the useful computational capacity—scales more rapidly. For some metrics, research has yet to establish large- $M$  scaling, although encouraging signs suggest superlinear scaling for both channel capacity and stable mode-locked laser pulse energy.

optical telecommunications, increasing the number of spatial modes in a fiber channel leads to a nominally linear increase in the Kerr-nonlinearity-limited Shannon capacity of the fiber channel, assuming the modal propagation is properly controlled [34,69,70]. Without increasing the size of the fiber cable, an improvement of 1000 or more is possible. However, once the multimode physics of the waveguide is considered, it turns out that the intrinsic disordered mode coupling that occurs in multimode waveguides may suppress the rate of Kerr-induced cross talk between transmission channels relative to an equal number of single-mode channels [71,72]. In effect, the scaling of capacity with the number of modes controlled may turn out to be even greater than linear (Fig. 2). Similar considerations apply to mode-locked fiber lasers or amplifiers, where the Kerr nonlinearity sets a similar bound on achievable pulse energy [73–75]. Here, it appears that different intracavity pulse evolutions [75] and multimode mode-locking mechanisms exist that can fundamentally tolerate greater amounts of nonlinearity—allowing for similar superlinear scaling with respect to number of modes controlled [73–75]. As an additional example, linear optical computers effectively perform matrix-vector multiplication, a computation whose complexity scales quadratically with the number of dimensions [76,77]. In optical computing devices that exploit nonlinear optical operations, the computational complexity could scale cubically or quartically [78], and in quantum information processing the scaling may even be exponential. In general, the more modes, properly controlled, the better.

What do we mean by “properly controlled”? In general, multimode light is properly controlled if it has *controlled intermodal phases*: the relative phase relationship of all modes should be fixed or controlled over time, not varying stochastically. While incoherent light, which is characterized by stochastic, time-varying intermodal phases, can be useful, e.g., for suppressing speckle artifacts in imaging, most new applications of multimode light require precise control of intermodal phases. Even in settings where spatial disorder is fundamental, such as wavefront shaping through complex media [79,80], or using strong fiber disorder to reduce multiple-input multiple-output (MIMO) processing complexity

[81,82], stably controlling the phase relationship between modes is a necessity.

Overall, controlling light in increasingly more modes is perhaps the most obvious way to fundamentally advance the capabilities of light and light-based devices, and its relevance to enhancing and enabling new applications is increasingly diverse. As the intertwined history of nonlinear optical light sources and measurements suggests, many of the most important applications are likely to be discovered and developed in the future. Nonetheless, among the wide range of proposed and existing applications, we can identify several overarching themes regarding where multimode coherent light is desirable for nonlinear optical processes:


- Spatiotemporal wave vector matching in nonlinear interactions, as in nonlinear photonics in bulk or multimode systems [83–91] or control of the spatiotemporal characteristics of spontaneous nonlinear processes, as in virtually all non-classical light generation [22,24–27,29,92–96].
- Control of light–matter interactions or light–light interactions involving very different time and spatial scales, such as in laser materials processing [97–101], the generation of THz or x ray radiation from optical pulses [83–85,88], electronic or plasma [18,19,21,102–110], and phononic interactions [111] or nonlinear microscopy [99,112–114]. These considerations are even more important for strong-field processes.
- Information capacity or complex functionality, as in photonic communication [34,69,70] and information processing [76–78,115,116], as well as for computational and/or high-throughput measurement modalities.

### We have hope for controlling multimode optical systems now due to several key developments over the last decade.

Well-controlled multimode photonics requires photonic designs and control systems with many DOFs, such as high-resolution optoelectronics or other reconfigurable substrates. These in turn usually require simulations with many-variable models, which require computing power and time. These requirements are even more stringent for well-controlled multimode *nonlinear* photonics because nonlinear systems are more costly to accurately simulate.

Figure 3 shows why these requirements can now be met: the growing accessibility of computing power and of high-resolution, high-performance optoelectronic interfaces, such as cameras, displays, and spatial light modulators (SLMs). Reconfigurable control of many modal DOFs can be achieved with SLMs or digital micromirror devices, which are now available with resolutions (i.e., number of pixels) close to  $10^7$ , or in fixed or reconfigurable means within nanofabricated photonic structures, such as those realized with the silicon photonics platform. In general, the number of design DOFs routinely available to optical scientists and engineers now exceeds by 3 to 5 orders of magnitude the technology of decades ago. This trend is likely to continue in coming decades. Figure 3(b) shows an important driving force for this trend: the ongoing transition of optical telecommunications from single- to multiple-spatial mode, space-division multiplexed (SDM) communication systems. Although the commercialization of such multimode photonic technologies will take years, the economic drive to develop low-cost, high-performance reconfigurable multimode photonics is already present.

We believe the last telling trend for the future of complex, nonlinear photonic system design is the tremendous and continuous

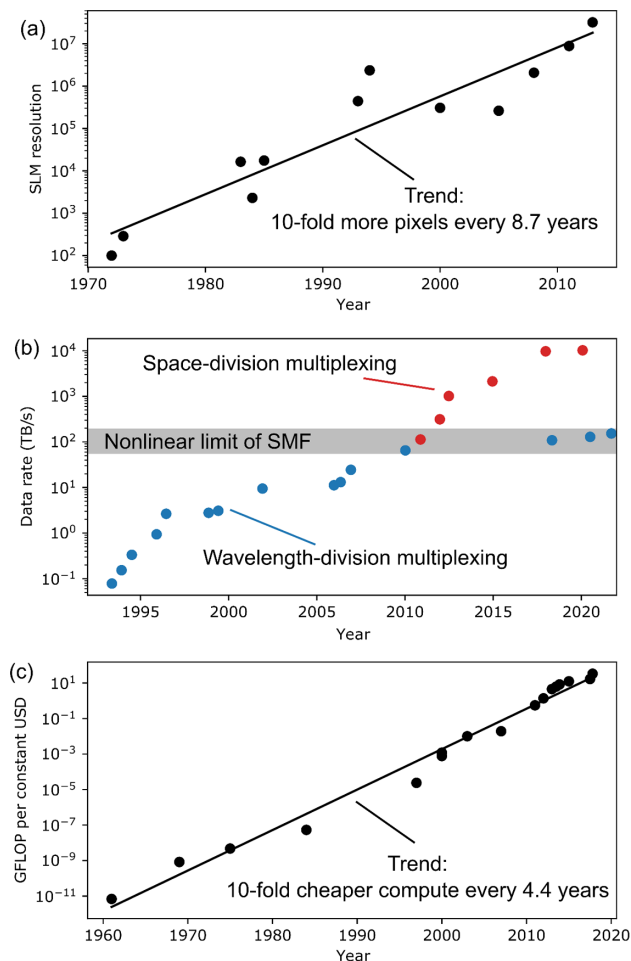

**Fig. 3.** Progress in computing and photonics. (a) Progress in reconfigurable photonic devices (SLM resolution, or number of pixels, data from [117–130]). (b) State-of-the-art laboratory demonstrations in optical telecommunications (total data rate of the optical channel, data from [70]). (c) Cost of computing (giga-floating-point-operations per USD, data from [131]). Our intention in (a) is to show a representative sampling of devices over time, so points include a variety of diverse SLM types, including both liquid-crystal-based and digital micromirror devices. SLM resolution grows by roughly a factor of 10 every 9 years, while GFLOP-per-constant-USD grows by 10 times every 4.2 years. The growth of telecommunications data rates has slowed, especially if multimode demonstrations are excluded, since systems are now operating very close to the single-mode Kerr-nonlinearity-limited Shannon capacity [34,69,70]. Since high-degree-of-freedom nonlinear photonics has usually been directly limited by the scale of computations that can be performed, it is poised to acutely benefit from ongoing improvements in computing costs.

progress in the cost of computation [Fig. 3(c)]. While some intuitive or analytical methods are emerging for design and prediction of highly multimode, spatiotemporal nonlinear optical systems (see Section 3), the tasks of predicting, designing, and controlling multimode, high-DOF nonlinear photonic systems are among the most computationally intensive endeavors in modern photonics. Since the availability and cost of computation has as a result often directly limiting what is possible in this area of photonics [32], we expect major progress in the coming years simply by leveraging new computational resources. This trend should motivate researchers to continue to explore and develop a wider range of computationally intensive techniques for high-DOF nonlinear photonics, to

enable the understanding of new physics, to produce new designs, and to automate complex experiments and devices [132].

For experimental control, such techniques include heuristic optimization algorithms like simulated annealing or genetic algorithms [133], data-driven neural network models and policies [134–139], and physics-informed machine learning models [140–143]. Methods developed for linear wave systems, such as transmission matrices [144–146], or concepts such as principal modes [147–151] and deformation eigenmodes [142], may also be generalizable to nonlinear systems [75,152]. For device design (and to a lesser extent, control), gradient-based optimization techniques, such as gradient descent using autodifferentiation (also known as differential programming) and the adjoint method [78,153–157], apply. These methods have proven surprisingly effective for optical device design, often defying human intuition. Through a combination of efficient algorithms and lowering costs of computing, we anticipate computer-assisted design of nonlinear photonic systems with ever-more DOFs. Deep learning is, in a nutshell, efficient gradient-based optimization of nonlinear functions with many DOFs. The unexpectedly favorable scaling of this paradigm with the number of adjustable DOFs has led to revolutionary progress in automated algorithms over the last decade [158]. A similar evolution appears likely for nonlinear photonics with many DOFs.

## 2. EMERGING PLATFORMS AND APPLICATIONS

### A. Multimode Frequency Conversion in Optical Fibers

From the earliest days of nonlinear fiber optics, multimode fibers have enabled remarkable frequency conversion capabilities, particularly for processes that involve large (10–100 THz) frequency shifts [159–162]. Large frequency differences between waves imply disparate propagation constants and velocities, along with possible multimode propagation of some of the participating waves. Multimode propagation creates challenges such as temporal walk-off for short pulses along with opportunities for phase-matching that build on concepts that have been extensively investigated in integrated waveguides. Frequency conversions of radiation from the continuous-wave to femtosecond domains, and from photon pairs to megawatt peak powers, have been demonstrated in multimode fibers [30]. Intermodal four-wave mixing (FWM) processes including the geometric parametric instability and spatiotemporal dispersive wave generation provide ways to generate spectral sidebands with large offsets [163–169] with either spatiotemporal phase-matching (i.e., chromatic dispersion is compensated by modal dispersion) or quasi-phase-matching through self-imaging propagation in graded-index (GRIN) fibers [170]. The use of radially symmetric higher-order  $LP_{0n}$  modes of step-index fiber allows long interactions of large-area modes, with anomalous dispersion [171] and enhanced phase-matching bandwidth for intermodal FWM [172]. Anomalous dispersion supports formation of Raman solitons, which underlie continuous frequency shifting over broad ranges in the near-infrared [173–175] and mid-infrared [176], and Raman beam-cleaning [177] may allow effective brightness-conversion in wavelength-shifting processes [178]. The impressive results described above are sometimes accompanied by complexity in design and implementation, and historically these have posed barriers to adoption of multimode techniques. Optimization of performance (such as spectral concentration of power) for specific

applications may increase the motivation to develop practical versions, which in some cases will require new perspectives.

One area where multimode nonlinear processes may find near-term application is telecommunications. FWM is the basis of several optical signal processing functions, and intermodal processes can be exploited to realize those functions in SDM systems. Following the observation that phase-matching of wavelengths several THz apart can be maintained over several km of multimode fiber [179], researchers have demonstrated selective conversion of wavelengths corresponding to different channels [180], as well efficient wavelength conversion with telecom-modulated signals while avoiding excessive noise arising from nonlinearity [181].

## B. Multimode Continuum Generation

Continuum generation in multimode fiber complements the capabilities of the now-common continua from single-mode fibers. Multimode continuum generation is extremely complex, with contributions from the phase-matched multi-wave mixing processes [182] mentioned in the prior section along with phase modulations and the production of solitons and dispersive waves in multiple transverse modes. Nevertheless, continua generated in multimode fiber can be controlled to some extent [133,183,184], and adequate beam quality for some applications can be achieved over wide spectral ranges [164,182,185]. Larger mode areas and the presence of modal dispersion in multimode fibers underlie scaling to higher pulse energy and power [186,187], but work remains to control the spectral coherence and temporal profile of slices of the continuum. Non-silica multimode fibers allow extension of continua to mid-infrared wavelengths [188–190]. Further advances in control of the spatial and temporal profiles will build on detailed comparison of theoretical and experimental results, as in [190], and will facilitate tailoring of continuum sources to applications.

## C. Multimode Propagation in Hollow-Core Fibers

Gas-filled hollow-core fibers (HCFs) offer major opportunities for exploration of multimode nonlinear wave propagation and engineering of high-performance sources of ultrashort pulses. Whether microstructure fiber or capillary, HCFs combine low modal dispersion with pressure-tunable chromatic dispersion and nonlinearity [191]. Multimode propagation effects have been invoked to explain aspects of frequency conversion ranging from the near-infrared to the vacuum-ultraviolet [192–195], compression of pulses to few-cycle duration accompanied by strong redshifting [196,197] or blueshifting [198], and the observation of new spatiotemporal wave packets [199]. High-harmonic generation (HHG) of ultraviolet light and x rays is an application that can benefit from multimode propagation for phase-matching [85,200–203] as well as from spatiotemporally localized fields [84] that form as a result of excitation of higher-order modes by plasma defocusing [204]. Direct driving of HHG by the wave packets reported in [199] offers exciting potential for practical extreme ultraviolet sources. Progress in engineering new sources across the spectrum will build on controlled excitation of higher-order modes of HCFs [205–207], will require better understanding of highly multimode propagation, and will benefit from the development of HCFs with lower losses for the higher-order modes [208].

## D. Multimode Short-Pulse Fiber Amplifiers


It will be interesting to look for nonlinear pulse evolutions in multimode fiber amplifiers that yield desirable spatiotemporal profiles. In dissipative systems, beam-cleaning processes can improve beam quality as measured by  $M^2$  and, thus, facilitate effective scaling of energy or power. Beam-cleaning accompanies amplification of sub-nanosecond pulses in doped GRIN fiber [209] and continuum generation in tapered doped GRIN fiber [210]. Wavefront shaping should be a useful tool for mitigating adverse spatial and temporal consequences of multimode propagation (and disorder), which should allow scaling of amplifier performance and generation of spatiotemporally controlled outputs [211]. Careful measurements of the spatiotemporal pulse evolution along with detailed theoretical modeling will be needed to fully exploit the potential of multimode fibers in short-pulse amplification. Extension of the concepts of principal modes [147] and deformation principal modes [142] to dissipative and nonlinear systems could be valuable for mitigation and possible exploitation of effects of mode coupling and disorder.

## E. Multimode Short-Pulse Fiber Lasers

Application of multimode engineering to fiber lasers could permit low-cost femtosecond lasers (and regenerative amplifiers) with dramatically higher pulse energy and average power, or that generate high-contrast customized spatiotemporal shapes. However, the high-dimensional dynamics that dictate how mode-locking occurs in these systems is challenging to predict. General insights such as the importance of low modal dispersion (e.g., through GRIN or multicore fiber designs) and spatial filtering to compensate modal dispersion enabled the first observations of spatiotemporal mode-locking (STML). [74,212–214]. Key mechanisms behind diverse forms of STML have been identified by “dissecting” a full laser model into nonlinear attractors [75], and numerical studies reveal a variety of spatiotemporal soliton, breather, and vortex solutions [215]. The practical impact of STML will likely be limited until ways to generate high-quality or intentionally structured beams are identified. Kerr beam-cleaning inside an STML laser can improve beam quality [216], and simulations provide glimpses of mode-locked states that yield high-power and near-Gaussian output beams [75]. While the occurrence of STML even in the presence of a significant manufacturing disorder is scientifically remarkable, for some applications disorder will need to be mitigated via intracavity wavefront shaping [217] or by novel fiber/cavity designs. On the other hand, disorder may present scientific opportunities such as investigation of lasing based on analogs of principal modes. A holy grail of multimode nonlinear engineering would be a design methodology that allows engineers to precisely control the dissipative, nonlinear self-organization that underlies STML to directly realize pulses with prescribed spatiotemporal features.

## F. Multimode Solid-State Lasers and Cavities

Major advances are occurring in engineering of multimode lasers [218], perhaps best exemplified by the demonstration of control of 300,000 transverse modes, allowing independent and high-resolution manipulation of the output structure in the near and far fields [219]. Interactions of the longitudinal and transverse cavity modes impact the spatial coherence of the output, which can be exploited for speckle suppression in imaging applications

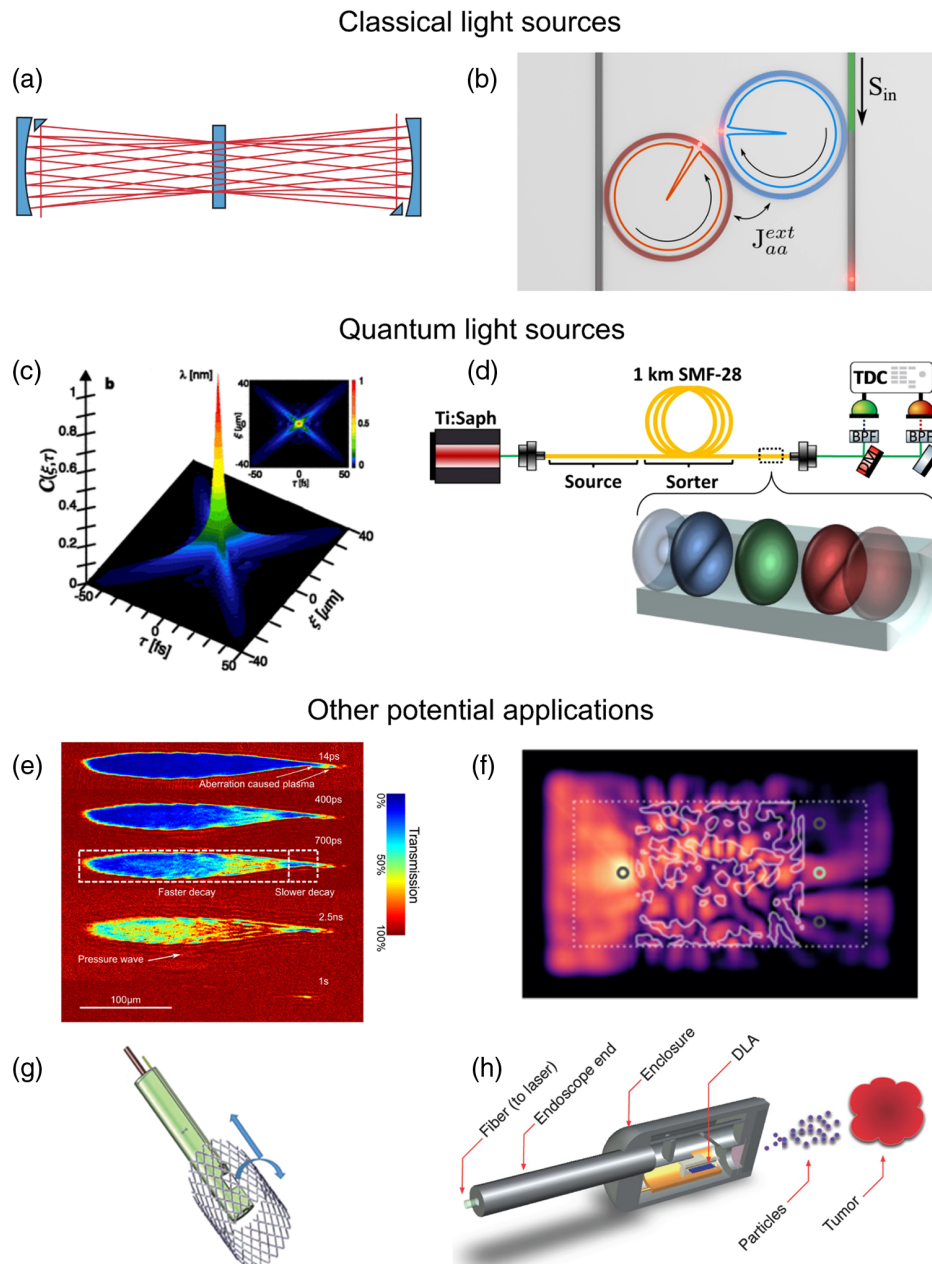

**Fig. 4.** Platforms and potential applications of multimode nonlinear photonics. (a) Multipass cells [234] and (b) integrated photonic structures [235] are flexible platforms wherein nonlinear multimode waves may be controlled to produce new forms of multimode coherent light. Spatiotemporal and multimode considerations are necessary to describe many spontaneous nonlinear processes for generating non-classical light, e.g., (c) in bulk media [92], or to engineer (d) fiber-based [236] or integrated [93] sources of non-classical multimode light. Applications that may benefit from coherent multimode light include the (e) intrinsically spatiotemporal interactions in laser materials processing and laser-plasma interactions [100]. Multimode nonlinear optical dynamics can be used for information processing, such as all-optical phase-retrieval [237], or (f) machine learning inference [115,238]. (g) Photoacoustic [239] and other biomedical optical imaging modalities, as well as (h) integrated laser-driven particle accelerators [110], may benefit from multimode fiber endoscope-based deployment [240–244]. Figures adapted from [92,100,110,234–236,238,245] with permission.

[220]. Modern short-pulse lasers now routinely operate in intensity regimes in which spatiotemporal nonlinear processes such as self-focusing are relevant [87,221–225]. Although self-focusing is often mitigated simply by larger beam dimensions, it plays an essential role in Kerr lens mode-locking [226,227], as well as bulk continuum generation [228–233]. Similar considerations apply, e.g., to multipass cell compressors (Fig. 4) and bulk multipass amplifiers [246,247], where spatiotemporal and self-focusing effects are typically avoided.

In all the systems above, the modes are perturbed modes of a “cold” cavity. Laser cavity solitons balance diffraction and self-focusing processes in otherwise unstable cavities [248]. Although most work in this area is in the spatial domain, spatiotemporal versions have been investigated [249,250]. Experiments are just scratching the surface of this area, with numerous theoretical investigations of systems that can support self-localized cavity “light bullets” and related wave packets [251–255]. Although multidimensional nonlinear optical waves have historically been harder

to control than their low-dimensional counterparts, experimental control of more complex DOFs that have no analog in lower dimensions, such as angular momentum and vortex structures, are increasingly being recognized as promising tools for reliable control of multidimensional nonlinear optical waves [31,239,256]. We think these and other innovations are worth pursuing: In single-mode fiber lasers, exploiting rather than avoiding nonlinear processes has boosted performance by over 3 orders of magnitude [73]; similar success with bulk ultrafast laser systems could enable compact, portable, and low-cost terawatt-class oscillators and petawatt-class master-oscillator power-amplifier systems.

### G. Multimode Bulk Nonlinear Photonic Devices

In high-intensity laser applications such as particle acceleration [18,19,21,104–106,110], light–plasma or light–electron interactions [107–109], and micromachining [97,100,101], careful engineering of the spatiotemporal structure of the driving laser pulses is required [257–259]. It is increasingly being appreciated that more complex spatial and spatiotemporal fields can lead to better performance or control in these processes than simple, unstructured Gaussian pulses. This is not surprising given that these processes typically involve a multitude of spatial and temporal scales [18,19,109,258]. While this endeavor is relatively new, we are optimistic that spatiotemporally tailored, high-intensity light sources will facilitate genuine breakthroughs both for enabling low-cost, compact devices with synchrotron-like capacities, as well as for pushing extreme light–matter interactions into qualitatively new regimes.

### H. Multimode Integrated Microresonator Frequency Combs

Microresonator frequency combs have attracted enormous interest for the efficient generation of stable octave-spanning frequency combs on an integrated semiconductor chip [260–263]. Broad bandwidths can be generated through Kerr-mediated parametric frequency generation in high quality factor microresonators with low ( $<1$  mW) drive powers. While many early combs featured low coherence [264] with phase variations between the frequency modes, the breakthrough observation of optical solitons enabled highly coherent mode-locked frequency combs [12,63,265]. Microresonators are highly multimode [266] with mode-crossings that complicate analysis, suppress soliton formation [267], and add characteristic features to the spectrum [268,269]. While operation is generally in a single mode, the existence of other modes enables dispersion engineering [270–275], reduced surface-scattering loss [276], thermal nonlinearity compensation [277], and single soliton generation [278]. Researchers have also demonstrated mutually stable solitons by use of a second polarization [279], propagation direction [280,281], frequency [282,283], coupled resonator [284], or spatial mode [283,285,286]. Two solitons in distinct spatial modes can be mutually coherent with distinct repetition rates [285], as well as synchronized in time [283,286], in a process comparable to STML in fiber lasers. The incorporation of gain by coupling to a fiber laser cavity allows the formation of laser cavity solitons, which underpin microcombs with dramatically reduced threshold power and dramatically enhanced mode efficiency [287]. While a recent study examines the topological properties of multiple coupled ring cavities [288], multiple-mode ( $>2$ ) operation of a microresonator has not yet been studied.

Operation of simultaneous multiple modes could add channels for entanglement [289,290], telecommunications [285,291–296], and signal processing [297–305], and could increase the power per comb for improved signal to noise for imaging [306,307], ranging [308,309], and spectroscopy [310–313]. In other words, integrated frequency combs provide a simple platform for exploring the coherent nonlinear interplay of multiple modes, and the effective control of these modes will directly benefit most established applications.

### I. Multimode Macroresonator Frequency Combs (Driven-Dissipative)

Beyond integrated devices, Kerr resonators have enabled important scientific and technological applications in macroscopic fiber and bulk optical platforms. The first soliton-forming Kerr resonators were demonstrated in fiber with unique benefits for photonic processing as an optical buffer [314,315]. More recently, fiber Kerr resonators have demonstrated the promise of complementing traditional mode-locked laser sources for short-pulse applications through their ability to generate high-performance ultrashort pulses in a versatile passive cavity without the fundamental wavelength and temporal limitations imposed by an active gain medium [316,317]. In parallel, bulk Kerr resonators have been established for the first time as an efficient approach to cavity enhancement, enabling record peak power enhancement for HHG [318]. While recent work shows how solitons in different polarizations of fiber can couple [319], form polarization domain walls [320], and support vectorial solitons [321], researchers have only just begun investigating nonlinear spatial mode coupling. A 2022 study examines STML in a Kerr resonator consisting of GRIN fiber, demonstrating high coherence and ultra-low timing jitter [286]. Looking forward, coherent control of multimode phenomena in macroscopic Kerr resonators has the potential for impressive processing power for telecommunications, unprecedented peak power performance, and versatility for short-pulse sources and enhancement cavities, as well beam control, combining, and spatiotemporal wave packet engineering.

### J. Multimode Quantum Nonlinear Photonic Devices

Multimode quantum light can facilitate efficient scaling of photonic quantum computing protocols, which usually require high-dimensional quantum states for error correction [322–324], quantum-enhanced imaging techniques [35], or other quantum-enhanced characteristics, such as super-classical pointing stability [325]. For large-scale photonic quantum information processing systems especially, multiple DOF and high-dimensional encodings are becoming increasingly attractive and even essential [326,327]. But multimode nonlinear photonics is not only useful for quantum photonic devices, it is in many respects fundamental to it. Spontaneous nonlinear processes, like parametric downconversion and FWM, supply the majority of non-classical light. Since these processes populate all available modes that are energy- and momentum-conserving, in bulk media or multimode structures their design *requires* a multimode, spatiotemporal formalism, even with continuous-wave pumping [22,24–27,29,92–96]. While single-mode waveguides simplify design, they inevitably increase loss. In photonic integrated circuits, integrated multimode waveguides also enable efficient routes toward larger linear quantum optical circuits including mode encodings, coherent conversion

schemes, and qubit or qudit states [93,326,328–331]. Quantum photonic systems based on free-space or multimode fiber [94,332–334] may, however, especially in the short-term, facilitate control of multimode quantum optical states with drastically lower loss and larger scale. Overall, quantum optics is increasingly multimode and high-dimensional both because of necessity—non-classical light generation is by default a spatiotemporal, multimode process—and opportunity—high-dimensional quantum light can be quantitatively superior for quantum computing, quantum sensing, and quantum manipulation.

### K. Other Integrated Multimode Nonlinear Photonic Devices

Nonlinear photonic devices with many DOFs have been proposed to perform a wide range of functions. The noisy, analog dynamics of nonlinear optical systems makes them poorly suited to digital computations but attractive for brain-like functions, such as heuristic optimization or deep neural network inference [78,239,335–338]. A primary goal of optical neuromorphic computers is to improve energy efficiency, so the power required for typical nonlinear optics is a challenge. One solution is enhancing nonlinearities through strong spatiotemporal confinement in emerging platforms like thin-film lithium niobate [339], or in exciton-polariton [340–342] or phonon-polariton [343,344] light-matter quasiparticles, which permit spatiotemporal nonlinear optics with light levels approaching the single-photon scale [342]. Integrated multimode nonlinear photonic devices may also include systems for particle acceleration [18,19,21,104–106,110,345] or, plausibly, miniaturized electron beam sources [107,108]. In general, controlling in many dimensions the behavior of intense laser light in tightly confined integrated settings should facilitate low-cost, portable versions of lab-scale devices as well as entirely new functions, such as analog computing.

## 3. EMERGING METHODOLOGIES

### A. Arbitrary Multimode Field Generation

The development of light sources with complete control of the spatiotemporal profile of the electromagnetic field will both enable and benefit from emerging concepts in multimode nonlinear photonics. Spatiotemporal light shaping [346–349] is rudimentary compared to spatial [1] or temporal [350,351] versions, but emerging techniques based on controlling spatio-spectral correlations (Fig. 5) [355] or coherently combining the outputs of multiple emitters (Fig. 5) [106,356,357] allow synthesis of a rich variety of localized spatiotemporal structures with separable [358] or non-separable [355] profiles. These include *X*-waves [359], wave packets with controllable group velocities [89,90,355,360], space-time toroidal vortices [361], and accelerating spatiotemporal packets [358,362]. The combination of a SLM and multi-plane light conversion [Figs. 5(a) and 5(b)] underlie mode-based synthesis of light fields completely controlled in space, time, and polarization [363]. A major open challenge is the generation of high-power multimode light, which will be a natural tool for nonlinear spatiotemporal interactions [111,364]. High intensities will mostly preclude “carving” desired fields after the light is generated and place a premium on production of structured light from the source [Fig. 5(b)]. Appropriately designed multimode or multicore sources may exploit competition for gain in lasers


[75,218,219,365] and/or scalable coherent combining schemes [106,357], and multimode propagation may even help mitigate pulse-distorting nonlinear processes.

### B. Beam Self-Cleaning in Multimode Light Sources

The observation of beam-cleaning in a conservative system was quite surprising. With input power well below the critical power for self-focusing, a speckled input beam launched into passive multimode GRIN fiber evolves to a bell-shaped intensity profile as it propagates. First observed with nanosecond pulses [366], experiments with continuum generation [186] and femtosecond pulses [367] exhibited beam-cleaning soon after [30]. Much excitement for potential applications naturally ensued, and beam-cleaning was quickly exploited to enhance photoacoustic microscopy [245] and to produce a diffraction-limited beam from a multimode mode-locked fiber laser [216]. Multi-octave continua with good beam quality can be generated in multimode fiber [186], and such a continuum was employed as a stable three-color source for multiphoton microscopy and endoscopy [Fig. 5(d)] [354]. Applications of beam-cleaning with greater impact than these initial demonstrations will require deeper understanding and control of coherence as well as the dramatic spatiotemporal dynamics [368,369] that can occur in beam-cleaning processes. It is now understood that conservative beam-cleaning based on the electronic Kerr nonlinearity cannot improve the beam quality parameter  $M^2$  [370,371], as expected from thermodynamic considerations. Nonetheless, light generated by geometric parametric instability [164] or stimulated Raman scattering [175,185,372] in multimode fibers may be dominated by the fundamental mode [177], and dissipative Kerr beam-cleaning processes may yield net benefits in fiber lasers [74,75] or amplifiers [209,210]. The judicious combination of beam-cleaning processes with dissipation offers exciting prospects for engineering light sources with enhanced performance.

### C. Applications of Optical Thermodynamics to Design of Multimode Optical Systems

While emerging multimode technologies could prove to be revolutionary, they pose a new set of fundamental challenges. These stem from the extreme complexity of multimode systems, which is generally exacerbated by nonlinearities [373,374]. Nonlinear multi-wave mixing processes induce energy exchange through a multitude of possible pathways [370,375–377], which can number in the billions even in the presence of only  $\sim 100$  modes. Modeling and harnessing the response of such complex configurations will be difficult even with the advanced computing resources and techniques described above. An equilibrium optical thermodynamic theory can effectively describe the processes of energy/power exchange in conservative multimode systems with weak nonlinear interactions [378–382], and it provides intuition about multimode nonlinear evolution through maximization of photonic entropy [Fig. 5(e)]. As thermodynamic approaches are validated by experiments [371,383–385] that include beam-cleaning, it will be interesting to apply them to the design of multimode sources of the kinds discussed in Section 2. Extensions to non-equilibrium versions of optical thermodynamics are challenging conceptually, but related work [386] suggests that such approaches may become effective tools for analyzing the dissipative environments of lasers and amplifiers.

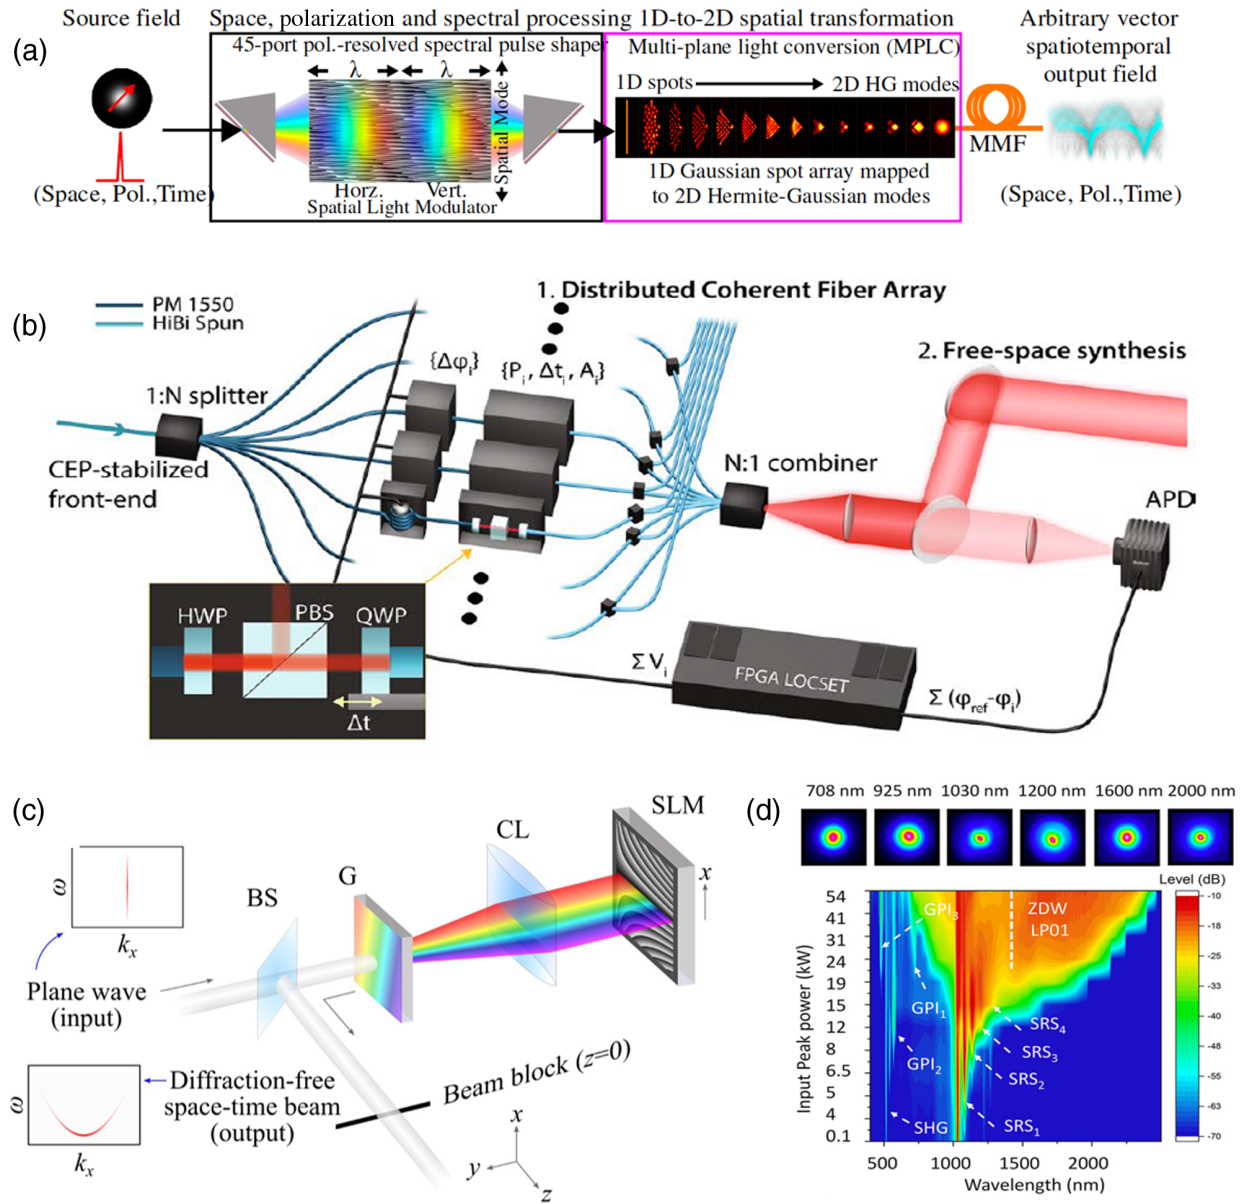

**Fig. 5.** Emerging methodologies relevant to multimode nonlinear photonics. (a) Schematic of a device capable of mapping an input vector spatiotemporal field onto an arbitrary vector spatiotemporal output field [352]. (b) Control of light “from the source”: schematic of system for coherent spatiotemporal beam combination, a power-scalable approach for spatiotemporal arbitrary waveform generation [106]. (c) Concept and schematic apparatus for creating a class of spatiotemporally shaped fields, including space-time light-sheets [353]. (d) Output beam profiles and continuum generated in multimode fiber [354]. GPI refers to geometric parametric instability, and SRS refers to stimulated Raman scattering. Adapted from [106,352–354] with permission.

#### D. Applications of Data-Driven and Inverse Multimode Design

Deep learning involves computational optimization of nonlinear networks, which can often be viewed as discrete approximations of high-dimensional nonlinear dynamical systems [78,387–389]. The surprising efficacy of deep learning is now understood to result from the remarkable properties of stochastic gradient descent in high-dimensional parameter spaces [158]. These virtues of high-dimensional gradient-based optimization, along with the shrinking cost of computing [Fig. 3(c)], make computational inverse design of multimode linear and nonlinear photonic devices an increasingly feasible and exciting prospect. While so far many applications of inverse design in photonics [153,157,390] have been for relatively simple, few-mode devices, optimizations of

multimode [156,391] and even multimode nonlinear photonic systems [154,238,336,338] are now appearing. To permit faster design of multimode systems with many DOFs, one family of strategies employs deep neural networks to either accelerate approximate simulations, and/or to express high-dimensional designs (often with discrete parameter spaces) in continuous lower-dimensional latent spaces [143,392–395]. Applying these techniques to multimode nonlinear devices will probably require improvements in neural network emulators of multimode nonlinear optical wave propagation, where early results are encouraging [396]. These strategies, employing relatively black-box models, may be improved on by techniques that incorporate physical insight [143,392,393]. Overall, designing nonlinear dynamics with many DOFs is challenging but increasingly feasible with

computer-assisted design methodologies due to both algorithmic advances and the steady improvements in the cost of computing.

## 4. CONCLUSION

Enormous progress has been made in engineering nonlinear optical systems based on systems that access limited numbers of modes or DOFs, and these find widespread application. Photonic systems with enhanced or new capabilities will be possible with control of light fields and light-matter interactions with many DOFs. Understanding and design of highly multimode nonlinear optical systems certainly present major technical and conceptual challenges. However, advances in understanding of multimode linear systems, along with development of optical components with many DOFs and enhanced computing resources, create a strong foundation for addressing these challenges. Armed with these tools, we expect that future photonics engineers may design nonlinear multimode devices and instruments in ways that are presently challenging or impossible. Extrapolating from the history of nonlinear optical devices to date (Fig. 1), we expect that this new class of complex nonlinear optical devices will have major impact on optical science and will facilitate a wide range of new applications.

**Funding.** Office of Naval Research (N00014-18-1-2347, N00014-20-1-2789); National Science Foundation (ECCS-1912742, EECS-1711230); Army Research Office (W911NF1710481); Simons Foundation (733682); United States-Israel Binational Science Foundation (2016381).

**Acknowledgment.** The authors thank S. Carbajo and G. Stewart for assistance with Fig. 5, and N. Bender and H. Haig for a critical reading of the paper.

**Disclosures.** The authors declare no conflicts of interest.

**Data availability.** Data underlying the results presented in this paper are not publicly available at this time but may be obtained from the authors upon reasonable request.

## REFERENCES

1. A. Forbes, M. de Oliveira, and M. R. Dennis, "Structured light," *Nat. Photonics* **15**, 253–262 (2021).
2. H. Rubinsztein-Dunlop, A. Forbes, M. V. Berry, *et al.*, "Roadmap on structured light," *J. Opt.* **19**, 013001 (2016).
3. M. Piccardo, V. Ginis, A. Forbes, *et al.*, "Roadmap on multimode light shaping," *J. Opt.* **24**, 013001 (2021).
4. P. W. Smith, "Mode-locking of lasers," *Proc. IEEE* **58**, 1342–1357 (1970).
5. H. A. Haus, "Mode-locking of lasers," *IEEE J. Sel. Top. Quantum Electron.* **6**, 1173–1185 (2000).
6. C. Spielmann, P. F. Curley, T. Brabec, and F. Krausz, "Ultrabroadband femtosecond lasers," *IEEE J. Quantum Electron.* **30**, 1100–1114 (1994).
7. S. A. Diddams, "The evolving optical frequency comb," *J. Opt. Soc. Am. B* **27**, B51–B62 (2010).
8. C. Xu and F. W. Wise, "Recent advances in fibre lasers for nonlinear microscopy," *Nat. Photonics* **7**, 875–882 (2013).
9. M. E. Fermann and I. Hartl, "Ultrafast fibre lasers," *Nat. Photonics* **7**, 868–874 (2013).
10. W. H. Renninger, A. Chong, and F. W. Wise, "Pulse shaping and evolution in normal-dispersion mode-locked fiber lasers," *IEEE J. Sel. Top. Quantum Electron.* **18**, 389–398 (2011).
11. N. Picqu and T. W. Hansch, "Frequency comb spectroscopy," *Nat. Photonics* **13**, 146–157 (2019).
12. T. J. Kippenberg, A. L. Gaeta, M. Lipson, and M. L. Gorodetsky, "Dissipative Kerr solitons in optical microresonators," *Science* **361**, eaan8083 (2018).
13. R. R. Alfano and S. L. Shapiro, "Direct distortion of electronic clouds of rare-gas atoms in intense electric fields," *Phys. Rev. Lett.* **24**, 1217–1220 (1970).
14. R. R. Alfano and S. L. Shapiro, "Observation of self-phase modulation and small-scale filaments in crystals and glasses," *Phys. Rev. Lett.* **24**, 592–594 (1970).
15. P. B. Corkum, C. Rolland, and T. Srinivasan-Rao, "Supercontinuum generation in gases," *Phys. Rev. Lett.* **57**, 2268–2271 (1986).
16. A. L. Gaeta, "Catastrophic collapse of ultrashort pulses," *Phys. Rev. Lett.* **84**, 3582–3585 (2000).
17. J. M. Dudley, G. Genty, and S. Coen, "Supercontinuum generation in photonic crystal fiber," *Rev. Mod. Phys.* **78**, 1135–1184 (2006).
18. S. Carbajo, E. A. Nanni, L. J. Wong, G. Moriena, P. D. Keathley, G. Laurent, R. J. D. Miller, and F. X. Kaertner, "Direct longitudinal laser acceleration of electrons in free space," *Phys. Rev. Accel. Beams* **19**, 021303 (2016).
19. S. W. Jolly, "On the importance of frequency-dependent beam parameters for vacuum acceleration with few-cycle radially polarized laser beams," *Opt. Lett.* **45**, 3865–3868 (2020).
20. S. W. Jolly, "Influence of longitudinal chromatism on vacuum acceleration by intense radially polarized laser beams," *Opt. Lett.* **44**, 1833–1836 (2019).
21. D. Cesar, J. Maxson, X. Shen, K. P. Wootton, S. Tan, R. J. England, and P. Musumeci, "Enhanced energy gain in a dielectric laser accelerator using a tilted pulse front laser," *Opt. Express* **26**, 29216–29224 (2018).
22. A. Joobeur, B. E. A. Saleh, and M. C. Teich, "Spatiotemporal coherence properties of entangled light beams generated by parametric down-conversion," *Phys. Rev. A* **50**, 3349–3361 (1994).
23. L. La Volpe, S. De, M. I. Kolobov, V. Parigi, C. Fabre, N. Treps, and D. B. Horoshko, "Spatiotemporal entanglement in a noncollinear optical parametric amplifier," *Phys. Rev. Appl.* **15**, 024016 (2021).
24. L. La Volpe, S. De, T. Kouadou, D. Horoshko, M. I. Kolobov, C. Fabre, V. Parigi, and N. Treps, "Multimode single-pass spatio-temporal squeezing," *Opt. Express* **28**, 12385–12394 (2020).
25. A. Gatti, T. Corti, E. Brambilla, and D. B. Horoshko, "Dimensionality of the spatiotemporal entanglement of parametric down-conversion photon pairs," *Phys. Rev. A* **86**, 053803 (2012).
26. A. Gatti, E. Brambilla, L. Caspani, O. Jedrkiewicz, and L. A. Lugiato, "X entanglement: the nonfactorable spatiotemporal structure of biphoton correlation," *Phys. Rev. Lett.* **102**, 223601 (2009).
27. L. Caspani, E. Brambilla, and A. Gatti, "Tailoring the spatiotemporal structure of biphoton entanglement in type-I parametric down-conversion," *Phys. Rev. A* **81**, 033808 (2010).
28. F. S. Roux, "Spatiotemporal effects on squeezing measurements," *Phys. Rev. A* **103**, 013701 (2021).
29. D. Cruz-Delgado, R. Ramirez-Alarcon, E. Ortiz-Ricardo, J. Monroy-Ruz, F. Dominguez-Serna, H. Cruz-Ramirez, K. Garay-Palmett, and A. B. U'Ren, "Fiber-based photon-pair source capable of hybrid entanglement in frequency and transverse mode, controllably scalable to higher dimensions," *Sci. Rep.* **6**, 27377 (2016).
30. K. Krupa, A. Tonello, A. Barthelemy, T. Mansuryan, V. Couderc, G. Millot, P. Grelu, D. Modotto, S. A. Babin, and S. Wabnitz, "Multimode nonlinear fiber optics, a spatiotemporal avenue," *APL Photon.* **4**, 110901 (2019).
31. Y. V. Kartashov, G. E. Astrakharchik, B. A. Malomed, and L. Torner, "Frontiers in multidimensional self-trapping of nonlinear fields and matter," *Nat. Rev. Phys.* **1**, 185–197 (2019).
32. L. G. Wright, Z. M. Ziegler, P. M. Lushnikov, Z. Zhu, M. A. Eftekhar, D. N. Christodoulides, and F. W. Wise, "Multimode nonlinear fiber optics: massively parallel numerical solver, tutorial, and outlook," *IEEE J. Sel. Top. Quantum Electron.* **24**, 1–16 (2017).
33. L. G. Wright, *Spatiotemporal Nonlinear Optics in Multimode Fibers* (Cornell University, 2018).
34. P. J. Winzer, D. T. Neilson, and A. R. Chraplyvy, "Fiber-optic transmission and networking: the previous 20 and the next 20 years," *Opt. Express* **26**, 24190–24239 (2018).
35. P.-A. Moreau, E. Toninelli, T. Gregory, and M. J. Padgett, "Imaging with quantum states of light," *Nat. Rev. Phys.* **1**, 367–380 (2019).
36. M. Kira, S. W. Koch, R. P. Smith, A. E. Hunter, and S. T. Cundiff, "Quantum spectroscopy with Schrödinger-cat states," *Nat. Phys.* **7**, 799–804 (2011).
37. T. A. Klar, S. Jakobs, M. Dyba, A. Egner, and S. W. Hell, "Fluorescence microscopy with diffraction resolution barrier broken by stimulated emission," *Proc. Natl. Acad. Sci. USA* **97**, 8206–8210 (2000).
38. M. G. L. Gustafsson, "Surpassing the lateral resolution limit by a factor of two using structured illumination microscopy," *J. Microsc.* **198**, 82–87 (2000).

39. E. Betzig, G. H. Patterson, R. Sougrat, O. W. Lindwasser, S. Olenych, J. S. Bonifacino, M. W. Davidson, J. Lippincott-Schwartz, and H. F. Hess, "Imaging intracellular fluorescent proteins at nanometer resolution," *Science* **313**, 1642–1645 (2006).
40. J. Huisken, J. Swoger, F. Del Bene, J. Wittbrodt, and E. H. K. Stelzer, "Optical sectioning deep inside live embryos by selective plane illumination microscopy," *Science* **305**, 1007–1009 (2004).
41. W. Denk, J. H. Strickler, and W. W. Webb, "Two-photon laser scanning fluorescence microscopy," *Science* **248**, 73–76 (1990).
42. M. D. Duncan, J. Reintjes, and T. J. Manuccia, "Scanning coherent anti-Stokes Raman microscope," *Opt. Lett.* **7**, 350–352 (1982).
43. C. L. Evans and X. S. Xie, "Coherent anti-Stokes Raman scattering microscopy: chemical imaging for biology and medicine," *Annu. Rev. Anal. Chem.* **1**, 883–909 (2008).
44. A. Chodos and J. Ouellette, "This month in physics history: December 1958: invention of the laser," *APS News* **12**(11) (2003).
45. "Developer of the laser calls it 'asolution seeking a problem'," in *New York Times* (May 6, 1964), p. 69.
46. J. N. Mait, G. W. Euliss, and R. A. Athale, "Computational imaging," *Adv. Opt. Photon.* **10**, 409–483 (2018).
47. J. A. Giordmaine and R. C. Miller, "Tunable coherent parametric oscillation in LiNbO<sub>3</sub> at optical frequencies," *Phys. Rev. Lett.* **14**, 973–976 (1965).
48. P. A. Franken, A. E. Hill, C. W. E. Peters, and G. Weinreich, "Generation of optical harmonics," *Phys. Rev. Lett.* **7**, 118–119 (1961).
49. D. Magde and H. Mahr, "Study in ammonium dihydrogen phosphate of spontaneous parametric interaction tunable from 4400 to 16 000 angstroms," *Phys. Rev. Lett.* **18**, 905–907 (1967).
50. S. E. Harris, M. K. Oshman, and R. L. Byer, "Observation of tunable optical parametric fluorescence," *Phys. Rev. Lett.* **18**, 732–734 (1967).
51. N. H. Burnett, H. A. Baldis, M. C. Richardson, and G. D. Enright, "Harmonic generation in CO<sub>2</sub> laser target interaction," *Appl. Phys. Lett.* **31**, 172–174 (1977).
52. R. E. Slusher, L. W. Hollberg, B. Yurke, J. C. Mertz, and J. F. Valley, "Observation of squeezed states generated by four-wave mixing in an optical cavity," *Phys. Rev. Lett.* **55**, 2409–2412 (1985).
53. U. L. Andersen, T. Gehring, C. Marquardt, and G. Leuchs, "30 years of squeezed light generation," *Phys. Scr.* **91**, 053001 (2016).
54. R. J. Mears, L. Reekie, I. M. Jauncey, and D. N. Payne, "Low-noise erbium-doped fibre amplifier operating at 1.54  $\mu\text{m}$ ," *Electron. Lett.* **23**, 1026–1028 (1987).
55. E. Desurvire, J. R. Simpson, and P. C. Becker, "High-gain erbium-doped traveling-wave fiber amplifier," *Opt. Lett.* **12**, 888–890 (1987).
56. D. B. Keck, R. D. Maurer, and P. C. Schultz, "On the ultimate lower limit of attenuation in glass optical waveguides," *Appl. Phys. Lett.* **22**, 307–309 (1973).
57. J. D. Kafka, T. Baer, and D. W. Hall, "Mode-locked erbium-doped fiber laser with soliton pulse shaping," *Opt. Lett.* **14**, 1269–1271 (1989).
58. M. W. Phillips, A. I. Ferguson, and D. C. Hanna, "Frequency-modulation mode locking of a Nd<sup>3+</sup>-doped fiber laser," *Opt. Lett.* **14**, 219–221 (1989).
59. I. N. Duling, L. Goldberg, and J. F. Weller, "High-power, mode-locked Nd: fibre laser pumped by an injection-locked diode array," *Electron. Lett.* **24**, 1333–1335 (1988).
60. G. Geister and R. Ulrich, "Neodymium-fibre laser with integrated-optic mode locker," *Opt. Commun.* **68**, 187–189 (1988).
61. G. P. Agrawal, "Optical communication: its history and recent progress," in *Optics in Our Time* (Springer, 2016), pp. 177–199.
62. T. Udem, J. Reichert, R. Holzwarth, and T. W. Hansch, "Absolute optical frequency measurement of the cesium D<sub>1</sub> line with a mode-locked laser," *Phys. Rev. Lett.* **82**, 3568–3571 (1999).
63. T. Herr, V. Brasch, J. D. Jost, C. Y. Wang, N. M. Kondratiev, M. L. Gorodetsky, and T. J. Kippenberg, "Temporal solitons in optical microresonators," *Nat. Photonics* **8**, 145–152 (2014).
64. P. Del'Haye, A. Schliesser, O. Arcizet, T. Wilken, R. Holzwarth, and T. J. Kippenberg, "Optical frequency comb generation from a monolithic microresonator," *Nature* **450**, 1214–1217 (2007).
65. D. A. B. Miller, "Waves, modes, communications, and optics: a tutorial," *Adv. Opt. Photonics* **11**, 679–825 (2019).
66. G. P. Agrawal, "Nonlinear fiber optics," in *Nonlinear Science at the Dawn of the 21st Century* (Springer, 2000), pp. 195–211.
67. M. Rose and H. Hogan, "A History of the Laser: 1960–2019," *Photonics Spectra* (June 2019).
68. W. Krupke and V. Gapontsev, "Fiber lasers grow in power," *Laser Focus World* (August 1 2002).
69. D. J. Richardson, J. M. Fini, and L. E. Nelson, "Space-division multiplexing in optical fibres," *Nat. Photonics* **7**, 354–362 (2013).
70. B. J. Puttnam, G. Rademacher, and R. S. Lus, "Space-division multiplexing for optical fiber communications," *Optica* **8**, 1186–1203 (2021).
71. A. Mecozzi, C. Antonelli, and M. Shtaif, "Nonlinear propagation in multi-mode fibers in the strong coupling regime," *Opt. Express* **20**, 11673–11678 (2012).
72. C. Antonelli, M. Shtaif, and A. Mecozzi, "Modeling of nonlinear propagation in space-division multiplexed fiber-optic transmission," *J. Lightwave Technol.* **34**, 36–54 (2015).
73. W. Fu, L. G. Wright, P. Sidorenko, S. Backus, and F. W. Wise, "Several new directions for ultrafast fiber lasers," *Opt. Express* **26**, 9432–9463 (2018).
74. L. G. Wright, D. N. Christodoulides, and F. W. Wise, "Spatiotemporal mode-locking in multimode fiber lasers," *Science* **358**, 94–97 (2017).
75. L. G. Wright, P. Sidorenko, H. Pourbeyram, Z. M. Ziegler, A. Isichenko, B. A. Malomed, C. R. Menyuk, D. N. Christodoulides, and F. W. Wise, "Mechanisms of spatiotemporal mode-locking," *Nat. Phys.* **16**, 565–570 (2020).
76. G. Wetzstein, A. Ozcan, S. Gigan, S. Fan, D. Englund, M. Soljai, C. Denz, D. A. B. Miller, and D. Psaltis, "Inference in artificial intelligence with deep optics and photonics," *Nature* **588**, 39–47 (2020).
77. R. Hamerly, L. Bernstein, A. Sluuds, M. Soljai, and D. Englund, "Large-scale optical neural networks based on photoelectric multiplication," *Phys. Rev. X* **9**, 021032 (2019).
78. L. G. Wright, T. Onodera, M. M. Stein, T. Wang, D. T. Schachter, Z. Hu, and P. L. McMahon, "Deep physical neural networks trained with back-propagation," *Nature* **601**, 549–555 (2022).
79. A. P. Mosk, A. Lagendijk, G. Leroose, and M. Fink, "Controlling waves in space and time for imaging and focusing in complex media," *Nat. Photonics* **6**, 283–292 (2012).
80. S. Gigan, O. Katz, H. B. de Aguiar, *et al.*, "Roadmap on wavefront shaping and deep imaging in complex media," arXiv:2111.14908 (2021).
81. K.-P. Ho and J. M. Kahn, "Statistics of group delays in multimode fiber with strong mode coupling," *J. Lightwave Technol.* **29**, 3119–3128 (2011).
82. S. O. Arik, D. Askarov, and J. M. Kahn, "Effect of mode coupling on signal processing complexity in mode-division multiplexing," *J. Lightwave Technol.* **31**, 423–431 (2012).
83. I. Babushkin, W. Kuehn, C. Koehler, S. Skupin, L. Berge, K. Reimann, M. Woerner, J. Herrmann, and T. Elsaesser, "Ultrafast spatiotemporal dynamics of terahertz generation by ionizing two-color femtosecond pulses in gases," *Phys. Rev. Lett.* **105**, 053903 (2010).
84. T. Popmintchev, M.-C. Chen, D. Popmintchev, *et al.*, "Bright coherent ultrahigh harmonics in the keV x-ray regime from mid-infrared femtosecond lasers," *Science* **336**, 1287–1291 (2012).
85. E. T. F. Rogers, S. L. Stebbings, A. M. de Paula, C. A. Froud, M. Praeger, B. Mills, J. Grant-Jacob, W. S. Brocklesby, and J. G. Frey, "Spatiotemporal phase-matching in capillary high-harmonic generation," *J. Opt. Soc. Am. B* **29**, 806–812 (2012).
86. G. Vampa, T. J. Hammond, M. Nesrallah, A. Y. Naumov, P. B. Corkum, and T. Brabec, "Light amplification by seeded Kerr instability," *Science* **359**, 673–675 (2018).
87. G. Cerullo and S. De Silvestri, "Ultrafast optical parametric amplifiers," *Rev. Sci. Instrum.* **74**, 1–18 (2003).
88. K. Murate, M. J. Roshtkhar, X. Ropagnol, and F. Blanchard, "Adaptive spatiotemporal optical pulse front tilt using a digital micromirror device and its terahertz application," *Opt. Lett.* **43**, 2090–2093 (2018).
89. A. Sainte-Marie, O. Gobert, and F. Quere, "Controlling the velocity of ultrashort light pulses in vacuum through spatio-temporal couplings," *Optica* **4**, 1298–1304 (2017).
90. H. Kondakci and A. F. Abouraddy, "Optical space-time wave packets having arbitrary group velocities in free space," *Nat. Commun.* **10**, 929 (2019).
91. T. T. Simpson, D. Ramsey, P. Franke, N. Vafaei-Najafabadi, D. Turnbull, D. H. Froula, and J. P. Palastro, "Nonlinear spatiotemporal control of laser intensity," *Opt. Express* **28**, 38516–38526 (2020).
92. O. Jedrkiewicz, A. Picozzi, M. Clerici, D. Faccio, and P. Di Trapani, "Emergence of X-shaped spatiotemporal coherence in optical waves," *Phys. Rev. Lett.* **97**, 243903 (2006).

93. L. T. Feng, M. Zhang, X. Xiong, Y. Chen, H. Wu, M. Li, G. P. Guo, G. C. Guo, D. X. Dai, and X. F. Ren, "On-chip transverse-mode entangled photon pair source," *npj Quantum Inf.* **5**, 1–7 (2019).
94. H. Pourbeyram and A. Mafi, "Photon pair generation in multimode optical fibers via intermodal phase matching," *Phys. Rev. A* **94**, 023815 (2016).
95. H. Pourbeyram and A. Mafi, "Photon pair generation with tailored frequency correlations in graded-index multimode fibers," *Opt. Lett.* **43**, 2018–2021 (2018).
96. K. Rottwitz, J. G. Koefoed, and E. N. Christensen, "Photon-pair sources based on intermodal four-wave mixing in few-mode fibers," *Fibers* **6**, 32 (2018).
97. K. Mishchik, R. Beuton, O. D. Caulier, S. Skupin, B. Chimier, G. Duchateau, B. Chassagne, R. Kling, C. Hnninger, E. Mottay, and J. Lopez, "Improved laser glass cutting by spatio-temporal control of energy deposition using bursts of femtosecond pulses," *Opt. Express* **25**, 33271–33282 (2017).
98. P. Wang, W. Chu, W. Li, Y. Tan, J. Qi, Y. Liao, Z. Wang, and Y. Cheng, "Aberration-insensitive three-dimensional micromachining in glass with spatiotemporally shaped femtosecond laser pulses," *Opt. Lett.* **43**, 3485–3488 (2018).
99. B. Sun, P. S. Salter, C. Roider, A. Jesacher, J. Strauss, J. Heberle, M. Schmidt, and M. J. Booth, "Four-dimensional light shaping: manipulating ultrafast spatiotemporal foci in space and time," *Light Sci. Appl.* **7**, 17117 (2018).
100. K. Bergner, B. Seyfarth, K. A. Lammers, T. Ullsperger, S. Dring, M. Heinrich, M. Kumkar, D. Flamm, A. Tunnermann, and S. Nolte, "Spatiotemporal analysis of glass volume processing using ultrashort laser pulses," *Appl. Opt.* **57**, 4618–4632 (2018).
101. Z. Yan, P. Li, J. Gao, Y. Wang, L. Wang, M. Beresna, and J. Zhang, "Anisotropic nanostructure generated by a spatial-temporal manipulating picosecond pulse for multidimensional optical data storage," *Opt. Lett.* **46**, 5485–5488 (2021).
102. M. Durach, A. Rusina, M. I. Stockman, and K. Nelson, "Toward full spatiotemporal control on the nanoscale," *Nano Lett.* **7**, 3145–3149 (2007).
103. M. Aeschlimann, M. Bauer, D. Bayer, T. Brixner, S. Cunovic, F. Dimler, A. Fischer, W. Pfeiffer, M. Rohmer, C. Schneider, F. Steeb, C. Strüber, and D. V. Voronine, "Spatiotemporal control of nano-optical excitations," *Proc. Natl. Acad. Sci. USA* **107**, 5329–5333 (2010).
104. C. Varin and M. Pich, "Relativistic attosecond electron pulses from a free-space laser-acceleration scheme," *Phys. Rev. E* **74**, 045602 (2006).
105. L. J. Wong and F. X. Kaertner, "Direct acceleration of an electron in infinite vacuum by a pulsed radially-polarized laser beam," *Opt. Express* **18**, 25035–25051 (2010).
106. R. Lemons, W. Liu, J. C. Frisch, A. Fry, J. Robinson, S. R. Smith, and S. Carbajo, "Integrated structured light architectures," *Sci. Rep.* **11**, 796 (2021).
107. O. J. Luiten, S. B. Van der Geer, M. J. De Loos, F. B. Kiewiet, and M. J. Van Der Wiel, "How to realize uniform three-dimensional ellipsoidal electron bunches," *Phys. Rev. Lett.* **93**, 094802 (2004).
108. H. Li, I. V. Bazarov, B. M. Dunham, and F. W. Wise, "Three-dimensional laser pulse intensity diagnostic for photoinjectors," *Phys. Rev. ST Accel. Beams* **14**, 112802 (2011).
109. D. H. Froula, D. Turnbull, A. S. Davies, T. J. Kessler, D. Haberberger, J. P. Palastro, S.-W. Bahk, I. A. Begishev, R. Boni, S. Bucht, J. Katz, and J. L. Shaw, "Spatiotemporal control of laser intensity," *Nat. Photonics* **12**, 262–265 (2018).
110. R. J. England, R. J. Noble, K. Bane, D. H. Dowell, C. K. Ng, J. E. Spencer, S. Tantawi, Z. Wu, R. L. Byer, E. Peralta, and K. Soong, "Dielectric laser accelerators," *Rev. Mod. Phys.* **86**, 1337–1389 (2014).
111. T. Feurer, J. C. Vaughan, and K. A. Nelson, "Spatiotemporal coherent control of lattice vibrational waves," *Science* **299**, 374–377 (2003).
112. L.-C. Cheng, C.-Y. Chang, C.-Y. Lin, K.-C. Cho, W.-C. Yen, N.-S. Chang, C. Xu, C. Y. Dong, and S.-J. Chen, "Spatiotemporal focusing-based widefield multiphoton microscopy for fast optical sectioning," *Opt. Express* **20**, 8939–8948 (2012).
113. C. G. Durfee, M. Greco, E. Block, D. Vitek, and J. A. Squier, "Intuitive analysis of space-time focusing with double-ABCD calculation," *Opt. Express* **20**, 14244–14259 (2012).
114. O. Hernandez, E. Papagiakoumou, D. Tanese, K. Fidelin, C. Wyart, and V. Emiliani, "Three-dimensional spatiotemporal focusing of holographic patterns," *Nat. Commun.* **7**, 11928 (2016).
115. U. Tegin, M. Yldrm, L. Ouz, C. Moser, and D. Psaltis, "Scalable optical learning operator," *Nat. Comput. Sci.* **1**, 542–549 (2021).
116. X. Porte, A. Skalli, N. Haghighi, S. Reitzenstein, J. A. Lott, and D. Brunner, "A complete, parallel and autonomous photonic neural network in a semiconductor multimode laser," *J. Phys. Photon.* **3**, 024017 (2021).
117. H. N. Roberts, "Strain-biased PLZT input devices (page composers) for holographic memories and optical data processing," *Appl. Opt.* **11**, 397–404 (1972).
118. B. Hill and K. P. Schmidt, "New page-composer for holographic data storage," *Appl. Opt.* **12**, 1193–1198 (1973).
119. L. J. Hornbeck, "128 × 128 deformable mirror device," *IEEE Trans. Electron Devices* **30**, 539–545 (1983).
120. D. Psaltis, E. G. Paek, and S. S. Venkatesh, "Optical image correlation with a binary spatial light modulator," *Opt. Eng.* **23**, 236698 (1984).
121. H.-K. Liu, J. A. Davis, and R. A. Lilly, "Optical-data-processing properties of a liquid-crystal television spatial light modulator," *Opt. Lett.* **10**, 635–637 (1985).
122. J. B. Sampsel, "Digital micromirror device and its application to projection displays," *J. Vac. Sci. Technol. B* **12**, 3242–3246 (1994).
123. J. A. Davis, D. E. McNamara, D. M. Cottrell, and T. Sonehara, "Two-dimensional polarization encoding with a phase-only liquid-crystal spatial light modulator," *Appl. Opt.* **39**, 1549–1554 (2000).
124. E. Schonbrun, R. Piestun, P. Jordan, J. Cooper, K. D. Wulff, J. Courtial, and M. Padgett, "3D interferometric optical tweezers using a single spatial light modulator," *Opt. Express* **13**, 3777–3786 (2005).
125. J. C. Vaughan, T. Hornung, T. Feurer, and K. A. Nelson, "Diffraction-based femtosecond pulse shaping with a two-dimensional spatial light modulator," *Opt. Lett.* **30**, 323–325 (2005).
126. A. Jesacher, C. Maurer, A. Schwaighofer, S. Bernet, and M. Ritsch-Marte, "Near-perfect hologram reconstruction with a spatial light modulator," *Opt. Express* **16**, 2597–2603 (2008).
127. M. Sugawara, S. Sawada, H. Fujinuma, Y. Shishikui, J. Zubrzycki, R. Weerakkody, and A. Quedest, "Super hi-vision at the London 2012 Olympics," *SMPTE Motion Imag. J.* **122**, 29–39 (2013).
128. W. P. Bleha, Jr. and L. A. Lei, "Advances in liquid crystal on silicon (LCOS) spatial light modulator technology," *Proc. SPIE* **8736**, 87360A (2013).
129. M. Makowski, I. Ducin, K. Kakarenko, J. Suszek, and A. Kowalczyk, "Performance of the 4k phase-only spatial light modulator in image projection by computer-generated holography," *Photon. Lett. Poland* **8**, 26–28 (2016).
130. Y. Isomae, N. Sugawara, N. Iwasaki, T. Honda, and K. Amari, "Phase-only spatial light modulator having high reflectance, high-definition pixels and high photo-durability," *Proc. SPIE* **1178**, 117880T (2021).
131. "Wikipedia history of GFLOPS COSTS," 2020, <https://aiimpacts.org/wikipedia-history-of-gflops-costs/>.
132. G. Genty, L. Salmela, J. M. Dudley, D. Brunner, A. Kokhanovskiy, S. Kobtsev, and S. K. Turitsyn, "Machine learning and applications in ultrafast photonics," *Nat. Photonics* **15**, 91–101 (2021).
133. O. Tzang, A. M. Caravaca-Aguirre, K. Wagner, and R. Piestun, "Adaptive wavefront shaping for controlling nonlinear multimode interactions in optical fibres," *Nat. Photonics* **12**, 368–374 (2018).
134. N. Borhani, E. Kakkava, C. Moser, and D. Psaltis, "Learning to see through multimode fibers," *Optica* **5**, 960–966 (2018).
135. B. Rahmani, D. Loterie, G. Konstantinou, D. Psaltis, and C. Moser, "Multimode optical fiber transmission with a deep learning network," *Light Sci. Appl.* **7**, 69 (2018).
136. Y. Li, Y. Xue, and L. Tian, "Deep speckle correlation: a deep learning approach toward scalable imaging through scattering media," *Optica* **5**, 1181–1190 (2018).
137. S. Resisi, S. M. Popoff, and Y. Bromberg, "Image transmission through a dynamically perturbed multimode fiber by deep learning," *Laser Photon. Rev.* **15**, 2000553 (2021).
138. E. Kakkava, N. Borhani, B. Rahmani, U. Tein, C. Moser, and D. Psaltis, "Deep learning-based image classification through a multimode fiber in the presence of wavelength drift," *Appl. Sci.* **10**, 3816 (2020).
139. B. Rahmani, D. Loterie, E. Kakkava, N. Borhani, U. Tein, D. Psaltis, and C. Moser, "Actor neural networks for the robust control of partially measured nonlinear systems showcased for image propagation through diffuse media," *Nat. Mach. Intell.* **2**, 403–410 (2020).
140. G. E. Karniadakis, I. G. Kevrekidis, L. Lu, P. Perdikaris, S. Wang, and L. Yang, "Physics-informed machine learning," *Nat. Rev. Phys.* **3**, 422–440 (2021).

141. P. Caramazza, O. Moran, R. Murray-Smith, and D. Faccio, "Transmission of natural scene images through a multimode fibre," *Nat. Commun.* **10**, 2029 (2019).
142. M. W. Matthes, Y. Bromberg, J. de Rosny, and S. M. Popoff, "Learning and avoiding disorder in multimode fibers," *Phys. Rev. X* **11**, 021060 (2021).
143. J. Lim and D. Psaltis, "MaxwellNet: physics-driven deep neural network training based on Maxwell's equations," *APL Photon.* **7**, 011301 (2022).
144. S. M. Popoff, G. Lerosey, R. Carminati, M. Fink, A. C. Boccarda, and S. Gigan, "Measuring the transmission matrix in optics: an approach to the study and control of light propagation in disordered media," *Phys. Rev. Lett.* **104**, 100601 (2010).
145. S. M. Popoff, G. Lerosey, M. Fink, A. C. Boccarda, and S. Gigan, "Controlling light through optical disordered media: transmission matrix approach," *New J. Phys.* **13**, 123021 (2011).
146. J. Carpenter, B. J. Eggleton, and J. Schrder, "110 × 110 optical mode transfer matrix inversion," *Opt. Express* **22**, 96–101 (2014).
147. S. Fan and J. M. Kahn, "Principal modes in multimode waveguides," *Opt. Lett.* **30**, 135–137 (2005).
148. M. B. Shemirani, W. Mao, R. A. Panicker, and J. M. Kahn, "Principal modes in graded-index multimode fiber in presence of spatial- and polarization-mode coupling," *J. Lightwave Technol.* **27**, 1248–1261 (2009).
149. J. Carpenter, B. J. Eggleton, and J. Schrder, "Observation of Eisenbud-Wigner-Smith states as principal modes in multimode fibre," *Nat. Photonics* **9**, 751–757 (2015).
150. P. Ambichl, W. Xiong, Y. Bromberg, B. Redding, H. Cao, and S. Rotter, "Super- and anti-principal-modes in multimode waveguides," *Phys. Rev. X* **7**, 041053 (2017).
151. W. Xiong, P. Ambichl, Y. Bromberg, B. Redding, S. Rotter, and H. Cao, "Principal modes in multimode fibers: exploring the crossover from weak to strong mode coupling," *Opt. Express* **25**, 2709–2724 (2017).
152. A. Fleming, C. Conti, and A. Di Falco, "Perturbation of transmission matrices in nonlinear random media," *Ann. Phys.* **531**, 1900091 (2019).
153. S. Molesky, Z. Lin, A. Y. Piggott, W. Jin, J. Vuckovic, and A. W. Rodriguez, "Inverse design in nanophotonics," *Nat. Photonics* **12**, 659–670 (2018).
154. T. W. Hughes, M. Minkov, I. A. D. Williamson, and S. Fan, "Adjoint method and inverse design for nonlinear nanophotonic devices," *ACS Photon.* **5**, 4781–4787 (2018).
155. M. Innes, A. Edelman, K. Fischer, C. Rackauckas, E. Saba, V. B. Shah, and W. Tebbutt, "A differentiable programming system to bridge machine learning and scientific computing," arXiv:1907.07587 (2019).
156. Y. Liu, K. Xu, S. Wang, W. Shen, H. Xie, Y. Wang, S. Xiao, Y. Yao, J. Du, Z. He, and Q. Song, "Arbitrarily routed mode-division multiplexed photonic circuits for dense integration," *Nat. Commun.* **10**, 3263 (2019).
157. M. Minkov, I. A. D. Williamson, L. C. Andreani, D. Gerace, B. Lou, A. Y. Song, T. W. Hughes, and S. Fan, "Inverse design of photonic crystals through automatic differentiation," *ACS Photon.* **7**, 1729–1741 (2020).
158. T. J. Sejnowski, "The unreasonable effectiveness of deep learning in artificial intelligence," *Proc. Natl. Acad. Sci. USA* **117**, 30033–30038 (2020).
159. R. H. Stolen, J. E. Bjorkholm, and A. Ashkin, "Phase-matched three-wave mixing in silica fiber optical-waveguides," *Appl. Phys. Lett.* **24**, 308–310 (1974).
160. R. H. Stolen, "Phase-matched-stimulated four-photon mixing in silica-fiber waveguides," *IEEE J. Quantum Electron.* **11**, 100–103 (1975).
161. K. O. Hill, D. C. Johnson, and B. S. Kawasaki, "Efficient conversion of light over a wide spectral range by four-photon mixing in a multimode graded-index fiber," *Appl. Opt.* **20**, 1075–1079 (1981).
162. C. Lin and M. A. Bosch, "Large-stokes-shift stimulated four-photon mixing in optical fibers," *Appl. Phys. Lett.* **38**, 479–481 (1981).
163. E. Nazemosadat, H. Pourbeyram, and A. Mafi, "Phase matching for spontaneous frequency conversion via four-wave mixing in graded-index multimode optical fibers," *J. Opt. Soc. Am. B* **33**, 144–150 (2016).
164. K. Krupa, A. Tonello, A. Barthelemy, V. Couderc, B. M. Shalaby, A. Bendahmane, G. Millot, and S. Wabnitz, "Observation of geometric parametric instability induced by the periodic spatial self-imaging of multimode waves," *Phys. Rev. Lett.* **116**, 183901 (2016).
165. J. Demas, G. Prabhakar, T. He, and S. Ramachandran, "Wavelength-agile high-power sources via four-wave mixing in higher-order fiber modes," *Opt. Express* **25**, 7455–7464 (2017).
166. H. Tu, Z. Jiang, D. L. Marks, and S. A. Boppart, "Intermodal four-wave mixing from femtosecond pulse-pumped photonic crystal fiber," *Appl. Phys. Lett.* **94**, 101109 (2009).
167. J. Cheng, M. E. V. Pedersen, K. Charan, K. Wang, C. Xu, L. Gruner-Nielsen, and D. Jakobsen, "Intermodal Cerenkov radiation in a higher-order-mode fiber," *Opt. Lett.* **37**, 4410–4412 (2012).
168. B. Seigny, A. Cassez, O. Vanvincq, Y. Quiquempois, and G. Bouwmans, "High-quality ultraviolet beam generation in multimode photonic crystal fiber through nondegenerate four-wave mixing at 532 nm," *Opt. Lett.* **40**, 2389–2392 (2015).
169. L. G. Wright, S. Wabnitz, D. N. Christodoulides, and F. W. Wise, "Ultrabroadband dispersive radiation by spatiotemporal oscillation of multimode waves," *Phys. Rev. Lett.* **115**, 223902 (2015).
170. G. P. Agrawal, "Invite paper: self-imaging in multimode graded-index fibers and its impact on the nonlinear phenomena," *Opt. Fiber Technol.* **50**, 309–316 (2019).
171. J. Demas, P. Steinvurzel, B. Tai, L. Rishoj, Y. Chen, and S. Ramachandran, "Intermodal nonlinear mixing with Bessel beams in optical fiber," *Optica* **2**, 14–17 (2015).
172. J. Demas, L. Rishoj, X. Liu, G. Prabhakar, and S. Ramachandran, "Intermodal group-velocity engineering for broadband nonlinear optics," *Photon. Res.* **7**, 1–7 (2019).
173. L. Rishoj, B. Tai, P. Kristensen, and S. Ramachandran, "Soliton self-mode conversion: revisiting Raman scattering of ultrashort pulses," *Optica* **6**, 304–308 (2019).
174. M. Zitelli, F. Mangini, M. Ferraro, O. Sidelnikov, and S. Wabnitz, "Conditions for walk-off soliton generation in a multimode fiber," *Commun. Phys.* **4**, 182 (2021).
175. A. B. Grudinin, E. M. Dianov, D. V. Korbkin, A. M. Prokhorov, and D. V. Khaïdarov, "Nonlinear mode coupling in multimode optical fibers; excitation of femtosecond-range stimulated-Raman-scattering solitons," *Sov. J. Exp. Theor. Phys. Lett.* **47**, 356–359 (1988).
176. Y. X. Tang, L. G. Wright, K. Charan, T. Y. Wang, C. Xu, and F. W. Wise, "Generation of intense 100 fs solitons tunable from 2 to 4.3 μm in fluoride fiber," *Optica* **3**, 948–951 (2016).
177. N. B. Terry, T. G. Alley, and T. H. Russell, "An explanation of SRS beam cleanup in graded-index fibers and the absence of SRS beam cleanup in step-index fibers," *Opt. Express* **15**, 17509–17519 (2007).
178. M. Zitelli, M. Ferraro, F. Mangini, and S. Wabnitz, "Single-mode spatiotemporal soliton attractor in multimode GRIN fibers," *Photon. Res.* **9**, 741–748 (2021).
179. R. J. Essiambre, M. A. Mestre, R. Ryf, A. H. Gnauck, R. W. Tkach, A. R. Chraplyvy, Y. Sun, X. L. Jiang, and R. Lingle, "Experimental investigation of inter-modal four-wave mixing in few-mode fibers," *IEEE Photon. Technol. Lett.* **25**, 539–542 (2013).
180. O. F. Anjum, M. Guasoni, P. Horak, Y. M. Jung, M. Suzuki, T. Hasegawa, K. Bottrill, D. J. Richardson, F. Parmigiani, and P. Petropoulos, "Selective wavelength conversion in a few-mode fiber," *Opt. Express* **27**, 24072–24081 (2019).
181. G. Rademacher, R. S. Luis, B. J. Puttnam, Y. Awaji, M. Suzuki, T. Hasegawa, and N. Wada, "Wide-band intermodal wavelength conversion in a dispersion engineered highly nonlinear FMF," in *Optical Fiber Communication Conference (OFC)*, OSA Technical Digest (Optica, 2019).
182. A. Mussot, T. Sylvestre, L. Provino, and H. Maillotte, "Generation of a broadband single-mode supercontinuum in a conventional dispersion-shifted fiber by use of a subnanosecond microchip laser," *Opt. Lett.* **28**, 1820–1822 (2003).
183. L. G. Wright, D. N. Christodoulides, and F. W. Wise, "Controllable spatiotemporal nonlinear effects in multimode fibres," *Nat. Photonics* **9**, 306–310 (2015).
184. M. A. Eftekhar, L. G. Wright, M. S. Mills, M. Kolesik, R. A. Correa, F. W. Wise, and D. N. Christodoulides, "Versatile supercontinuum generation in parabolic multimode optical fibers," *Opt. Express* **25**, 9078–9087 (2017).
185. A. B. Grudinin, E. M. Dianov, D. V. Korbkin, A. M. Prokhorov, and D. V. Haidarov, "Stimulated Raman-scattering generation and propagation dynamics of femtosecond solitons in optical fibers," *Izv. Fiz.* **53**, 1552–1561 (1989).
186. G. Lopez-Galmiche, Z. S. Eznavah, M. A. Eftekhar, J. A. Lopez, L. G. Wright, F. Wise, D. Christodoulides, and R. A. Correa, "Visible supercontinuum generation in a graded index multimode fiber pumped at 1064 nm," *Opt. Lett.* **41**, 2553–2556 (2016).

187. K. Krupa, C. Louot, V. Couderc, M. Fabert, R. Guenard, B. M. Shalaby, A. Tonello, D. Pagnoux, P. Leproux, A. Bendahmane, R. Dupiol, G. Millot, and S. Wabnitz, "Spatiotemporal characterization of supercontinuum extending from the visible to the mid-infrared in a multimode graded-index optical fiber," *Opt. Lett.* **41**, 5785–5788 (2016).
188. J. Ramsay, S. Dupont, M. Johansen, L. Rishoj, K. Rottwitt, P. M. Moselund, and S. R. Keiding, "Generation of infrared supercontinuum radiation: spatial mode dispersion and higher-order mode propagation in ZBLAN step-index fibers," *Opt. Express* **21**, 10764–10771 (2013).
189. I. Kubat and O. Bang, "Multimode supercontinuum generation in chalcogenide glass fibres," *Opt. Express* **24**, 2513–2526 (2016).
190. Z. Esлами, A. Filipkowski, D. Pysz, M. Klimczak, R. Buczynski, and G. Genty, "Octave-spanning infrared supercontinuum generation in a graded-index multimode lead-bismuth-gallate fiber," in *Conference on Lasers and Electro-Optics Europe & European Quantum Electronics Conference (CLEO/Europe-EQEC)* (2021).
191. J. C. Travers, W. K. Chang, J. Nold, N. Y. Joly, and P. St.J. Russell, "Ultrafast nonlinear optics in gas-filled hollow-core photonic crystal fibers," *J. Opt. Soc. Am. B* **28**, A11–A26 (2011).
192. D. Faccio, A. Grun, P. K. Bates, O. Chalus, and J. Biegert, "Optical amplification in the near-infrared in gas-filled hollow-core fibers," *Opt. Lett.* **34**, 2918–2920 (2009).
193. F. Tani, J. C. Travers, and P. St.J. Russell, "Multimode ultrafast nonlinear optics in optical waveguides: numerical modeling and experiments in kagomé photonic-crystal fiber," *J. Opt. Soc. Am. B* **31**, 311–320 (2014).
194. S. Lorange, P. St.J. Russell, and D. Novoa, "Sub-40 fs pulses at 1.8  $\mu\text{m}$  and MHz repetition rates by chirp-assisted Raman scattering in hydrogen-filled hollow-core fiber," *J. Opt. Soc. Am. B* **37**, 3550–3556 (2020).
195. R. Tyumenev, P. St.J. Russell, and D. Novoa, "Narrowband vacuum ultraviolet light via cooperative Raman scattering in dual-pumped gas-filled photonic crystal fiber," *ACS Photon.* **7**, 1989–1993 (2020).
196. P. A. Carpegiani, G. Coccia, G. Fan, E. Kaksis, A. Pugzlys, A. Baltuska, R. Piccoli, Y. G. Jeong, A. Rovere, R. Morandotti, L. Razzari, B. E. Schmidt, A. A. Voronin, and A. M. Zheltikov, "Extreme Raman red shift: ultrafast multimode nonlinear space-time dynamics, pulse compression, and broadly tunable frequency conversion," *Optica* **7**, 1349–1354 (2020).
197. G. Fan, R. Safaei, O. Kwon, V. Schuster, K. Legare, P. Lassonde, A. Ehteshami, L. Arias, A. Laramee, J. Beaudoin-Bertrand, J. Limpert, Z. Tao, M. Spanner, B. E. Schmidt, H. Ibrahim, A. Baltuska, and F. Legare, "High energy redshifted and enhanced spectra broadening by molecular alignment," *Opt. Lett.* **45**, 3013–3016 (2020).
198. R. Piccoli, J. M. Brown, Y. G. Jeong, A. Rovere, L. Zanotto, M. B. Gaarde, F. Legare, A. Couairon, J. C. Travers, R. Morandotti, B. E. Schmidt, and L. Razzari, "Intense few-cycle visible pulses directly generated via nonlinear fibre mode mixing," *Nat. Photonics* **15**, 884–889 (2021).
199. R. Safaei, G. Y. Fan, O. Kwon, K. Legare, P. Lassonde, B. E. Schmidt, H. Ibrahim, and F. Legare, "High-energy multidimensional solitary states in hollow-core fibres," *Nat. Photonics* **14**, 733–739 (2020).
200. B. Dromey, M. Zepf, M. Landreman, and S. M. Hooker, "Quasi-phase-matching of harmonic generation via multimode beating in waveguides," *Opt. Express* **15**, 7894–7900 (2007).
201. T. Pfeifer and M. C. Downer, "Direct experimental observation of periodic intensity modulation along a straight hollow-core optical waveguide," *J. Opt. Soc. Am. B* **24**, 1025–1029 (2007).
202. L. Z. Liu, K. O'Keeffe, and S. M. Hooker, "Quasi-phase-matching of high-order-harmonic generation using polarization beating in optical waveguides," *Phys. Rev. A* **87**, 053823 (2013).
203. F. Wiegandt, P. N. Anderson, F. Yu, D. J. Treacher, D. T. Lloyd, P. J. Mosley, S. M. Hooker, and I. A. Walmsley, "Quasi-phase-matched high-harmonic generation in gas-filled hollow-core photonic crystal fiber," *Optica* **6**, 442–447 (2019).
204. X. H. Gao, G. Patwardhan, B. Shim, T. Popmintche, H. C. Kapteyn, M. M. Murnane, and A. L. Gaeta, "Ionization-assisted spatiotemporal localization in gas-filled capillaries," *Opt. Lett.* **43**, 3112–3115 (2018).
205. T. G. Euser, G. Whyte, M. Scharrer, J. S. Y. Chen, A. Abdolvand, J. Nold, C. F. Kaminski, and P. St.J. Russell, "Dynamic control of higher-order modes in hollow-core photonic crystal fibers," *Opt. Express* **16**, 17972–17981 (2008).
206. B. M. Trabold, A. Abdolvand, T. G. Euser, A. M. Walser, and P. St.J. Russell, "Amplification of higher-order modes by stimulated Raman scattering in  $\text{H}_2$ -filled hollow-core photonic crystal fiber," *Opt. Lett.* **38**, 600–602 (2013).
207. B. M. Trabold, D. Novoa, A. Abdolvand, and P. St.J. Russell, "Selective excitation of higher order modes in hollow-core PCF via prism-coupling," *Opt. Lett.* **39**, 3736–3739 (2014).
208. C. Goel and S. Yoo, "Low-loss multimoded antiresonant hollow core fiber," in *Conference on Lasers and Electro-Optics Pacific Rim (CLEO-PR)* (2020).
209. R. Guenard, K. Krupa, R. Dupiol, M. Fabert, A. Bendahmane, V. Kermene, A. Desfarges-Berthelemy, J. L. Auguste, A. Tonello, A. Barthelemy, G. Millot, S. Wabnitz, and V. Couderc, "Kerr self-cleaning of pulsed beam in an ytterbium doped multimode fiber," *Opt. Express* **25**, 4783–4792 (2017).
210. A. Niang, T. Mansuryan, K. Krupa, A. Tonello, M. Fabert, P. Leproux, D. Modotto, O. N. Egorova, A. E. Levchenko, D. S. Lipatov, S. L. Semjonov, G. Millot, V. Couderc, and S. Wabnitz, "Spatial beam self-cleaning and supercontinuum generation with Yb-doped multimode graded-index fiber taper based on accelerating self-imaging and dissipative landscape," *Opt. Express* **27**, 24018–24028 (2019).
211. R. Florentin, V. Kermene, J. Benoist, A. Desfarges-Berthelemy, D. Pagnoux, A. Barthelemy, and J. P. Huignard, "Shaping the light amplified in a multimode fiber," *Light Sci. Appl.* **6**, e16208 (2017).
212. Y. H. Ding, X. S. Xiao, K. W. Liu, S. Z. Fan, X. G. Zhang, and C. X. Yang, "Spatiotemporal mode-locking in lasers with large modal dispersion," *Phys. Rev. Lett.* **126**, 093901 (2021).
213. H. Q. Qin, X. S. Xiao, P. Wang, and C. X. Yang, "Observation of soliton molecules in a spatiotemporal mode-locked multimode fiber laser," *Opt. Lett.* **43**, 1982–1985 (2018).
214. K. W. Liu, X. S. Xiao, and C. X. Yang, "Observation of transition between multimode Q-switching and spatiotemporal mode locking," *Photon. Res.* **9**, 530–534 (2021).
215. T. Mayteevarunyoo, B. A. Malomed, and D. V. Skryabin, "Spatiotemporal dissipative solitons and vortices in a multi-transverse-mode fiber laser," *Opt. Express* **27**, 37364–37373 (2019).
216. U. Tegin, B. Rahmani, E. Kakkava, D. Psaltis, and C. Moser, "Single-mode output by controlling the spatiotemporal nonlinearities in mode-locked femtosecond multimode fiber lasers," *Adv. Photon.* **2**, 056005 (2020).
217. X. M. Wei, J. C. Jing, Y. C. Shen, and L. H. V. Wang, "Harnessing a multi-dimensional fibre laser using genetic wavefront shaping," *Light Sci. Appl.* **9**, 149 (2020).
218. A. Forbes, S. Ngcobo, L. Burger, and I. A. Litvin, "The digital laser: on-demand laser modes with the click of a button," *Proc. SPIE* **8960**, 89601K (2014).
219. C. Tradonsky, S. Mahler, G. D. Cai, V. Pal, R. Chiriki, A. A. Friesem, and N. Davidson, "High-resolution digital spatial control of a highly multimode laser," *Optica* **8**, 880–884 (2021).
220. R. Chiriki, S. Mahler, C. Tradonsky, V. Pal, A. A. Friesem, and N. Davidson, "Spatiotemporal supermodes: rapid reduction of spatial coherence in highly multimode lasers," *Phys. Rev. A* **98**, 023812 (2018).
221. S. Backus, C. G. Durfee, III, M. M. Murnane, and H. C. Kapteyn, "High power ultrafast lasers," *Rev. Sci. Instrum.* **69**, 1207–1223 (1998).
222. G. A. Mourou, T. Tajima, and S. V. Bulanov, "Optics in the relativistic regime," *Rev. Mod. Phys.* **78**, 309–371 (2006).
223. C. J. Saraceno, D. Sutter, T. Metzger, and M. A. Ahmed, "The amazing progress of high-power ultrafast thin-disk lasers," *J. Eur. Opt. Soc. Rapid Publ.* **15**, 1–7 (2019).
224. J. Brons, V. Pervak, E. Fedulova, D. Bauer, D. Sutter, V. Kalashnikov, A. Apolonskiy, O. Pronin, and F. Krausz, "Energy scaling of Kerr-lens mode-locked thin-disk oscillators," *Opt. Lett.* **39**, 6442–6445 (2014).
225. S. Goncharov, K. Fritsch, and O. Pronin, "110 MW thin-disk oscillator," arXiv:2204.03384 (2022).
226. D. K. Negus, L. Spinelli, N. Goldblatt, and G. Feugnet, "Sub-100 femtosecond pulse generation by Kerr lens mode-locking in  $\text{TiAlO}_3$ ," in *Advanced Solid State Lasers* (1991), paper SPL7.
227. I. P. Christov, V. D. Stoev, M. M. Murnane, and H. C. Kapteyn, "Mode-locking with a compensated space-time astigmatism," *Opt. Lett.* **20**, 2111–2113 (1995).
228. A. Couairon and A. Mysyrowicz, "Femtosecond filamentation in transparent media," *Phys. Rep.* **441**, 47–189 (2007).

229. A. Dubietis, G. Tamoauskas, R. Uminas, V. Jukna, and A. Couairon, "Ultrafast supercontinuum generation in bulk condensed media," *Lith. J. Phys.* **57**, 113–157 (2017).
230. C. Rolland and P. B. Corkum, "Compression of high-power optical pulses," *J. Opt. Soc. Am. B* **5**, 641–647 (1988).
231. M. Seidel, G. Arisholm, J. Brons, V. Pervak, and O. Pronin, "All solid-state spectral broadening: an average and peak power scalable method for compression of ultrashort pulses," *Opt. Express* **24**, 9412–9428 (2016).
232. P. He, Y. Liu, K. Zhao, H. Teng, X. He, P. Huang, H. Huang, S. Zhong, Y. Jiang, S. Fang, X. Hou, and Z. Wei, "High-efficiency supercontinuum generation in solid thin plates at 0.1 TW level," *Opt. Lett.* **42**, 474–477 (2017).
233. R. Budrinas, D. Kuinskas, and A. Varanavičius, "High-energy continuum generation in an array of thin plates pumped by tunable femtosecond IR pulses," *Appl. Phys. B* **123**, 212 (2017).
234. E. Vicentini, Y. C. Wang, D. Gatti, A. Gambetta, P. Laporta, G. Galzerano, K. Curtis, K. McEwan, C. R. Howle, and N. Coluccelli, "Nonlinear pulse compression to 22 fs at 15.6  $\mu$ J by an all-solid-state multipass approach," *Opt. Express* **28**, 4541–4549 (2020).
235. A. T. A. Tikan, J. Riemensberger, M. Churaev, K. Komagata, X. Ji, R. N. Wang, J. Liu, and T. J. Kippenberg, "Symmetry protection against mode crossings in multimode photonic resonator chains," in *Conference on Lasers and Electro-Optics*, OSA Technical Digest (Optica, 2021), paper FTu4E.4.
236. K. Sulimany and Y. Bromberg, "All-fiber source and sorter for multimode correlated photons," *npj Quantum Inf.* **8**, 1–5 (2022).
237. C. Tradonsky, I. Gershenzon, V. Pal, R. Chriki, A. A. Friesem, O. Raz, and N. Davidson, "Rapid laser solver for the phase retrieval problem," *Sci. Adv.* **5**, eaax4530 (2019).
238. T. W. Hughes, I. A. D. Williamson, M. Minkov, and S. Fan, "Wave physics as an analog recurrent neural network," *Sci. Adv.* **5**, eaay6946 (2019).
239. A. Desyatnikov, A. Maimistov, and B. Malomed, "Three-dimensional spinning solitons in dispersive media with the cubic-quintic nonlinearity," *Phys. Rev. E* **62**, 1457 (2000).
240. Y. Choi, C. Yoon, M. Kim, T. D. Yang, C. Fang-Yen, R. R. Dasari, K. J. Lee, and W. Choi, "Scanner-free and wide-field endoscopic imaging by using a single multimode optical fiber," *Phys. Rev. Lett.* **109**, 203901 (2012).
241. I. N. Papadopoulos, S. Farahi, C. Moser, and D. Psaltis, "High-resolution, lensless endoscope based on digital scanning through a multimode optical fiber," *Biomed Opt. Express* **4**, 260–270 (2013).
242. R. Y. Gu, R. N. Mahalati, and J. M. Kahn, "Design of flexible multi-mode fiber endoscope," *Opt. Express* **23**, 26905–26918 (2015).
243. M. Ploschner, T. Tyc, and T. Cizmar, "Seeing through chaos in multimode fibres," *Nat. Photonics* **9**, 529–535 (2015).
244. A. M. Caravaca-Aguirre and R. Pietsun, "Single multimode fiber endoscope," *Opt. Express* **25**, 1656–1665 (2017).
245. Y. Zhang, Y. Cao, and J.-X. Cheng, "High-resolution photoacoustic endoscope through beam self-cleaning in a graded index fiber," *Opt. Lett.* **44**, 3841–3844 (2019).
246. M. Hanna, F. Guichard, N. Daher, Q. Bournet, X. Delen, and P. Georges, "Nonlinear optics in multipass cells," *Laser Photon. Rev.* **15**, 2100220 (2021).
247. A. L. Viotti, M. Seidel, E. Escoto, S. Rajhans, W. P. Leemans, I. Hartl, and C. M. Heyl, "Multi-pass cells for post-compression of ultrashort laser pulses," *Optica* **9**, 197–216 (2022).
248. L. A. Lugiato, F. Prati, and M. Brambilla, *Nonlinear Optical Systems* (Cambridge University, 2015).
249. M. Brambilla, T. Maggipinto, G. Patera, and L. Columbo, "Cavity light bullets: three-dimensional localized structures in a nonlinear optical resonator," *Phys. Rev. Lett.* **93**, 203901 (2004).
250. F. Gustave, N. Radwell, C. McIntyre, J. P. Toomey, D. M. Kane, S. Barland, W. J. Firth, G. L. Oppo, and T. Ackemann, "Observation of mode-locked spatial laser solitons," *Phys. Rev. Lett.* **118**, 044102 (2017).
251. N. N. Rosanov, S. V. Fedorov, and N. A. Veretenov, "Laser solitons in 1D, 2D and 3D," *Eur. Phys. J. D* **73**, 141 (2019).
252. J. M. Soto-Crespo, P. Grelu, and N. Akhmediev, "Optical bullets and 'rockets' in nonlinear dissipative systems and their transformations and interactions," *Opt. Express* **14**, 4013–4025 (2006).
253. P. Grelu, J. M. Soto-Crespo, and N. Akhmediev, "Light bullets and dynamic pattern formation in nonlinear dissipative systems," *Opt. Express* **13**, 9352–9360 (2005).
254. N. Akhmediev, J. M. Soto-Crespo, and P. Grelu, "Spatiotemporal optical solitons in nonlinear dissipative media: from stationary light bullets to pulsating complexes," *Chaos* **17**, 037112 (2007).
255. W. H. Renninger and F. W. Wise, "Spatiotemporal soliton laser," *Optica* **1**, 101–104 (2014).
256. Y. C. Zhang, Z. W. Zhou, B. A. Malomed, and H. Pu, "Stable solitons in three dimensional free space without the ground state: self-trapped Bose-Einstein condensates with spin-orbit coupling," *Phys. Rev. Lett.* **115**, 253902 (2015).
257. S. Akturk, X. Gu, P. Bownan, and R. Trebino, "Spatio-temporal couplings in ultrashort laser pulses," *J. Opt.* **12**, 093001 (2010).
258. S. W. Jolly, O. Gobert, and F. Qur, "Spatio-temporal characterization of ultrashort laser beams: a tutorial," *J. Opt.* **22**, 103501 (2020).
259. A. Jeandet, S. W. Jolly, A. Borot, et al., "Survey of spatio-temporal couplings throughout high-power ultrashort lasers," *Opt. Express* **30**, 3262–3288 (2022).
260. A. A. Savchenkov, A. B. Matsko, and L. Maleki, "On frequency combs in monolithic resonators," *Nanophotonics* **5**, 363–391 (2016).
261. A. Pasquazi, M. Peccianti, L. Razzari, D. J. Moss, S. Coen, M. Erkintalo, Y. K. Chembo, T. Hansson, S. Wabnitz, P. Del'Haye, X. Xue, A. M. Weiner, and R. Morandotti, "Micro-combs: a novel generation of optical sources," *Phys. Rep.* **729**, 1–81 (2018).
262. A. L. Gaeta, M. Lipson, and T. J. Kippenberg, "Photonic-chip-based frequency combs," *Nat. Photonics* **13**, 158–169 (2019).
263. S. A. Diddams, K. Vahala, and T. Udem, "Optical frequency combs: coherently uniting the electromagnetic spectrum," *Science* **369**, aay3676 (2020).
264. F. Ferdous, H. Miao, P.-H. Wang, D. E. Leaird, K. Srinivasan, L. Chen, V. Aksyuk, and A. M. Weiner, "Probing coherence in microcavity frequency combs via optical pulse shaping," *Opt. Express* **20**, 21033–21043 (2012).
265. K. Saha, Y. Okawachi, B. Shim, J. S. Levy, R. Salem, A. R. Johnson, M. A. Foster, M. R. E. Lamont, M. Lipson, and A. Gaeta, "Modelocking and femtosecond pulse generation in chip-based frequency combs," *Opt. Express* **21**, 1335–1343 (2013).
266. T. Herr, V. Brasch, J. D. Jost, I. Mirgorodskiy, G. Lihachev, M. L. Gorodetsky, and T. J. Kippenberg, "Mode spectrum and temporal soliton formation in optical microresonators," *Phys. Rev. Lett.* **113**, 123901 (2014).
267. A. Kordts, M. H. P. Pfeiffer, H. Guo, V. Brasch, and T. J. Kippenberg, "Higher order mode suppression in high-Q anomalous dispersion SiN microresonators for temporal dissipative Kerr soliton formation," *Opt. Lett.* **41**, 452–455 (2016).
268. A. B. Matsko, W. Liang, A. A. Savchenkov, D. Eliyahu, and L. Maleki, "Optical Cherenkov radiation in overmoded microresonators," *Opt. Lett.* **41**, 2907–2910 (2016).
269. Q.-F. Yang, X. Yi, K. Y. Yang, and K. Vahala, "Spatial-mode-interaction-induced dispersive waves and their active tuning in microresonators," *Optica* **3**, 1132–1135 (2016).
270. A. A. Savchenkov, A. B. Matsko, W. Liang, V. S. Ilchenko, D. Seidel, and L. Maleki, "Kerr frequency comb generation in overmoded resonators," *Opt. Express* **20**, 27290–27298 (2012).
271. I. S. Grudin, L. Baumgartel, and N. Yu, "Impact of cavity spectrum on span in microresonator frequency combs," *Opt. Express* **21**, 26929–26935 (2013).
272. Y. Liu, Y. Xuan, X. Xue, P. H. Wang, A. J. Metcalf, S. Chen, M. Qi, and A. M. Weiner, "Investigation of mode interaction in optical microresonators for Kerr frequency comb generation," *Optica* **1**, 137–144 (2014).
273. J. K. Jang, Y. Okawachi, M. Yu, K. Luke, X. Ji, M. Lipson, and A. L. Gaeta, "Dynamics of mode-coupling-assisted microresonator frequency combs," *Opt. Express* **24**, 28794–28803 (2016).
274. M. Soltani, A. Matsko, and L. Maleki, "Enabling arbitrary wavelength frequency combs on chip," *Laser Photon. Rev.* **10**, 158–162 (2016).
275. S. Kim, K. Han, C. Wang, J. A. Jaramillo-Villegas, X. Xue, C. Bao, Y. Xuan, D. E. Leaird, A. M. Weiner, and M. Qi, "Dispersion engineering and frequency comb generation in thin silicon nitride concentric microresonators," *Nat. Commun.* **8**, 372 (2017).
276. X. Ji, J. K. Jang, U. D. Dave, M. Corato-Zanarella, C. Joshi, A. L. Gaeta, and M. Lipson, "Exploiting ultralow loss multimode waveguides for broadband frequency combs," *Laser Photon. Rev.* **15**, 2000353 (2021).

277. I. Grudin, H. Lee, T. Chen, and K. Vahala, "Compensation of thermal nonlinearity effect in optical resonators," *Opt. Express* **19**, 7365–7372 (2011).
278. C. Bao, Y. Xuan, D. E. Leaird, S. Wabnitz, M. Qi, and A. M. Weiner, "Spatial mode-interaction induced single soliton generation in microresonators," *Optica* **4**, 1011–1015 (2017).
279. C. Bao, P. Liao, A. Kordts, L. Zhang, A. Matsko, M. Karpov, M. H. P. Pfeiffer, G. Xie, Y. Cao, A. Alaiman, M. Tur, T. J. Kippenberg, and A. E. Willner, "Orthogonally polarized frequency comb generation from a Kerr comb via cross-phase modulation," *Opt. Lett.* **44**, 1472–1475 (2019).
280. Q. F. Yang, X. Yi, K. Y. Yang, and K. Vahala, "Counter-propagating solitons in microresonators," *Nat. Photonics* **11**, 560–564 (2017).
281. C. Joshi, A. Klenner, Y. Okawachi, M. Yu, K. Luke, X. Ji, M. Lipson, and A. L. Gaeta, "Counter-rotating cavity solitons in a silicon nitride microresonator," *Opt. Lett.* **43**, 547–550 (2018).
282. R. Luo, H. Liang, and Q. Lin, "Multicolor cavity soliton," *Opt. Express* **24**, 16777–16787 (2016).
283. Q. F. Yang, X. Yi, K. Y. Yang, and K. Vahala, "Stokes solitons in optical microcavities," *Nat. Phys.* **13**, 53–57 (2017).
284. Ó. B. Helgason, F. R. Arteaga-Sierra, Z. Ye, K. Twayana, P. A. Andrekson, M. Karlsson, J. Schröder, and T.-C. Victor, "Dissipative solitons in photonic molecules," *Nat. Photonics* **15**, 305–310 (2021).
285. E. Lucas, G. Lihachev, R. Bouchand, N. G. Pavlov, A. S. Raja, M. Karpov, M. L. Gorodetsky, and T. J. Kippenberg, "Spatial multiplexing of soliton microcombs," *Nat. Photonics* **12**, 699–705 (2018).
286. S.-W. Huang, M. Nie, K. Jia, Y. Xie, S. Zhu, and Z. Xie, "Spatiotemporal mode-locking and photonic flywheel in multimode microresonators," arXiv:2203.10257 (2022).
287. H. L. Bao, A. Cooper, M. Rowley, L. Di Lauro, J. S. T. Gongora, S. T. Chu, B. E. Little, G. L. Oppo, R. Morandotti, D. J. Moss, B. Wetzels, M. Peccianti, and A. Pasquazi, "Laser cavity-soliton microcombs," *Nat. Photonics* **13**, 384–389 (2019).
288. S. Mittal, G. Moille, K. Srinivasan, Y. K. Chembo, and M. Hafezi, "Topological frequency combs and nested temporal solitons," *Nat. Phys.* **17**, 1169–1176 (2021).
289. C. Reimer, M. Kues, P. Roztock, B. Wetzels, F. Grazioso, B. E. Little, S. T. Chu, T. Johnston, Y. Bromberg, L. Caspani, D. J. Moss, and R. Morandotti, "Generation of multiphoton entangled quantum states by means of integrated frequency combs," *Science* **351**, 1176–1180 (2016).
290. M. Kues, C. Reimer, J. M. Lukens, W. J. Munro, A. M. Weiner, D. J. Moss, and R. Morandotti, "Quantum optical microcombs," *Nat. Photonics* **13**, 170–179 (2019).
291. A. Fülöp, M. Mazur, A. Lorences-Riesgo, T. A. Eriksson, P.-H. Wang, Y. Xuan, D. E. Leaird, M. Qi, P. A. Andrekson, A. M. Weiner, and V. Torres-Company, "Long-haul coherent communications using microresonator-based frequency combs," *Opt. Express* **25**, 26678–26688 (2017).
292. Y. Geng, X. Huang, W. Cui, Y. Ling, B. Xu, J. Zhang, X. Yi, B. Wu, S.-W. Huang, K. Qiu, C. W. Wong, and H. Zhou, "Terabit optical OFDM super-channel transmission via coherent carriers of a hybrid chip-scale soliton frequency comb," *Opt. Lett.* **43**, 2406–2409 (2018).
293. P. Liao, C. Bao, A. Alaiman, A. Kordts, M. Karpov, M. H. P. Pfeiffer, L. Zhang, F. Alishahi, Y. Cao, K. Zou, A. Fallahpour, A. N. Willner, M. Tur, T. J. Kippenberg, and A. E. Willner, "Demonstration of multiple Kerr-frequency-comb generation using different lines from another Kerr comb located up to 50 km away," *J. Lightwave Technol.* **37**, 579–584 (2019).
294. B. Corcoran, M. Tan, X. Xu, A. Boes, J. Wu, T. G. Nguyen, S. T. Chu, B. E. Little, R. Morandotti, A. Mitchell, and D. J. Moss, "Ultra-dense optical data transmission over standard fibre with a single chip source," *Nat. Commun.* **11**, 2568 (2020).
295. P. Marin-Palomo, J. N. Kemal, T. J. Kippenberg, W. Freude, S. Randel, and C. Koos, "Performance of chip-scale optical frequency comb generators in coherent WDM communications," *Opt. Express* **28**, 12897–12910 (2020).
296. M. Mazur, M. G. Suh, A. Fulop, J. Schroder, V. Torres-Company, M. Karlsson, K. Vahala, and P. Andrekson, "High spectral efficiency coherent superchannel transmission with soliton microcombs," *J. Lightwave Technol.* **39**, 4367–4373 (2021).
297. X. Xu, J. Wu, T. G. Nguyen, T. Moein, S. T. Chu, B. E. Little, R. Morandotti, A. Mitchell, and D. J. Moss, "Photonic microwave true time delays for phased array antennas using a 49 GHz FSR integrated optical micro-comb source," *Photon. Res.* **6**, B30–B36 (2018).
298. X. Xue, Y. Xuan, C. Bao, S. Li, X. Zheng, B. Zhou, M. Qi, and A. M. Weiner, "Microcomb-based true-time-delay network for microwave beamforming with arbitrary beam pattern control," *J. Lightwave Technol.* **36**, 2312–2321 (2018).
299. A. N. Willner, P. Liao, K. Zou, A. Kordts, M. Karpov, Y. Cao, A. Alaiman, A. Fallahpour, F. Alishahi, M. Tur, T. Kippenberg, and A. E. Willner, "Scalable and reconfigurable optical tap-delay-line for multichannel equalization and correlation of 20-Gbaud QPSK signals using nonlinear wave mixing and a microresonator Kerr frequency comb," *Opt. Lett.* **43**, 5563–5566 (2018).
300. M. S. Alshaykh, J. D. McKinney, and A. M. Weiner, "Radio-frequency signal processing using optical frequency combs," *IEEE Photon. Technol. Lett.* **31**, 1874–1877 (2019).
301. M. Tan, X. Xu, J. Wu, R. Morandotti, A. Mitchell, and D. J. Moss, "Photonic RF and microwave filters based on 49 GHz and 200 GHz Kerr microcombs," *Opt. Commun.* **465**, 125563 (2020).
302. X. Xu, J. Wu, T. G. Nguyen, S. T. Chu, B. E. Little, R. Morandotti, A. Mitchell, and D. J. Moss, "Broadband RF channelizer based on an integrated optical frequency Kerr comb source," *J. Lightwave Technol.* **36**, 4519–4526 (2018).
303. J. Hu, J. He, J. Liu, A. S. Raja, M. Karpov, A. Lukashchuk, T. J. Kippenberg, and C. S. Brès, "Reconfigurable radiofrequency filters based on versatile soliton microcombs," *Nat. Commun.* **11**, 4377 (2020).
304. M. Tan, X. Xu, J. Wu, R. Morandotti, A. Mitchell, and D. J. Moss, "RF and microwave photonic temporal signal processing with Kerr micro-combs," *Adv. Phys. X* **6**, 1838946 (2021).
305. A. S. Raja, S. Lange, M. Karpov, K. Shi, X. Fu, R. Behrendt, D. Cletheroe, A. Lukashchuk, I. Haller, F. Karinou, B. Thomsen, K. Jozwik, J. Liu, P. Costa, T. J. Kippenberg, and H. Ballani, "Ultrafast optical circuit switching for data centers using integrated soliton microcombs," *Nat. Commun.* **12**, 5867 (2021).
306. X. Ji, X. Yao, A. Klenner, Y. Gan, A. L. Gaeta, C. P. Hendon, and M. Lipson, "Chip-based frequency comb sources for optical coherence tomography," *Opt. Express* **27**, 19896–19905 (2019).
307. P. J. Marchand, J. Riemensberger, J. C. Skehan, J. J. Ho, M. H. P. Pfeiffer, J. Liu, C. Hauger, T. Lasser, and T. J. Kippenberg, "Soliton microcomb based spectral domain optical coherence tomography," *Nat. Commun.* **12**, 427 (2021).
308. P. Trocha, M. Karpov, D. Ganin, M. H. P. Pfeiffer, A. Kordts, S. Wolf, J. Krockenberger, P. Marin-Palomo, C. Weimann, S. Randel, W. Freude, T. J. Kippenberg, and C. Koos, "Ultrafast optical ranging using microresonator soliton frequency combs," *Science* **359**, 887–891 (2018).
309. M. G. Suh and K. J. Vahala, "Soliton microcomb range measurement," *Science* **359**, 884–887 (2018).
310. N. G. Pavlov, G. Lihachev, S. Koptayev, E. Lucas, M. Karpov, N. M. Kondratiev, I. A. Bilenko, T. J. Kippenberg, and M. L. Gorodetsky, "Soliton dual frequency combs in crystalline microresonators," *Opt. Lett.* **42**, 514–517 (2017).
311. A. Dutt, C. Joshi, X. Ji, J. Cardenas, Y. Okawachi, K. Luke, A. L. Gaeta, and M. Lipson, "On-chip dual-comb source for spectroscopy," *Sci. Adv.* **4**, e1701858 (2018).
312. L. Stern, J. R. Stone, S. Kang, D. C. Cole, M. G. Suh, C. Fredrick, Z. Newman, K. Vahala, J. Kitching, S. A. Diddams, and S. B. Papp, "Direct Kerr frequency comb atomic spectroscopy and stabilization," *Sci. Adv.* **6**, eaax6230 (2020).
313. C. Bao, Z. Yuan, L. Wu, M. G. Suh, H. Wang, Q. Lin, and K. J. Vahala, "Architecture for microcomb-based GHz-mid-infrared dual-comb spectroscopy," *Nat. Commun.* **12**, 6573 (2021).
314. F. Leo, S. Coen, P. Kockaert, S. P. Gorza, P. Emplit, and M. Haelterman, "Temporal cavity solitons in one-dimensional Kerr media as bits in an all-optical buffer," *Nat. Photonics* **4**, 471–476 (2010).
315. J. K. Jang, M. Erkintalo, J. Schroder, B. J. Eggleton, S. G. Murdoch, and S. Coen, "All-optical buffer based on temporal cavity solitons operating at 10 Gb/s," *Opt. Lett.* **41**, 4526–4529 (2016).
316. X. Dong, Q. Yang, C. Spiess, V. G. Bucklew, and W. H. Renninger, "Stretched-pulse soliton Kerr resonators," *Phys. Rev. Lett.* **125**, 033902 (2020).
317. C. Spiess, Q. Yang, X. Dong, V. G. Bucklew, and W. H. Renninger, "Chirped dissipative solitons in driven optical resonators," *Optica* **8**, 861–869 (2021).

318. N. Lilienfein, C. Hofer, M. Högnér, T. Saule, M. Trubetskov, V. Pervak, E. Fill, C. Riek, A. Leitenstorfer, J. Limpert, F. Krausz, and I. Pupeza, "Temporal solitons in free-space femtosecond enhancement cavities," *Nat. Photonics* **13**, 214–218 (2019).
319. A. U. Nielsen, B. Garbin, S. Coen, S. G. Murdoch, and M. Erkintalo, "Coexistence and interactions between nonlinear states with different polarizations in a monochromatically driven passive Kerr resonator," *Phys. Rev. Lett.* **123**, 013902 (2019).
320. B. Garbin, J. Fatome, G. L. Oppo, M. Erkintalo, S. G. Murdoch, and S. Coen, "Dissipative polarization domain walls in a passive coherently driven Kerr resonator," *Phys. Rev. Lett.* **126**, 023904 (2021).
321. G. Xu, A. U. Nielsen, B. Garbin, L. Hill, G. L. Oppo, J. Fatome, S. G. Murdoch, S. Coen, and M. Erkintalo, "Spontaneous symmetry breaking of dissipative optical solitons in a two-component Kerr resonator," *Nat. Commun.* **12**, 4023 (2021).
322. T. Rudolph, "Why I am optimistic about the silicon-photonics route to quantum computing," *APL Photon.* **2**, 030901 (2017).
323. R. Raussendorf and H. J. Briegel, "A one-way quantum computer," *Phys. Rev. Lett.* **86**, 5188–5191 (2001).
324. J. E. Bourassa, R. N. Alexander, M. Vasmer, A. Patil, I. Tzitrin, T. Matsuura, D. Su, B. Q. Baragiola, S. Guha, G. Dauphinais, K. K. Sabapathy, N. C. Menicucci, and I. Dhand, "Blueprint for a scalable photonic fault-tolerant quantum computer," *Quantum* **5**, 392 (2021).
325. N. Treps, N. Grosse, W. P. Bowen, C. Fabre, H.-A. Bachor, and P. K. Lam, "A quantum laser pointer," *Science* **301**, 940–943 (2003).
326. A. Peruzzo, A. Laing, A. Politi, T. Rudolph, and J. L. O'Brien, "Multimode quantum interference of photons in multiport integrated devices," *Nat. Commun.* **2**, 224 (2011).
327. C. Fabre and N. Treps, "Modes and states in quantum optics," *Rev. Mod. Phys.* **92**, 035005 (2020).
328. E. Poem, Y. Gilead, and Y. Silberberg, "Two-photon path-entangled states in multimode waveguides," *Phys. Rev. Lett.* **108**, 153602 (2012).
329. L. T. Feng, M. Zhang, Z. Y. Zhou, M. Li, X. Xiong, L. Yu, B. S. Shi, G. P. Guo, D. X. Dai, X. F. Ren, and G. C. Guo, "On-chip coherent conversion of photonic quantum entanglement between different degrees of freedom," *Nat. Commun.* **7**, 11985 (2016).
330. A. Mohanty, M. Zhang, A. Dutt, S. Ramelow, P. Nussenzveig, and M. Lipson, "Quantum interference between transverse spatial waveguide modes," *Nat. Commun.* **8**, 14010 (2017).
331. X. Chen, Z. Fu, Q. Gong, and J. Wang, "Quantum entanglement on photonic chips: a review," *Adv. Photon.* **3**, 064002 (2021).
332. E. Karimi, D. Giovannini, E. Bolduc, N. Bent, F. M. Miatto, M. J. Padgett, and R. W. Boyd, "Exploring the quantum nature of the radial degree of freedom of a photon via Hong-Ou-Mandel interference," *Phys. Rev. A* **89**, 013829 (2014).
333. A. Mair, A. Vaziri, G. Weihs, and A. Zeilinger, "Entanglement of the orbital angular momentum states of photons," *Nature* **412**, 313–316 (2016).
334. S. Leedumrongwatthanakun, L. Innocenti, H. Defienne, T. Juffmann, A. Ferraro, M. Paternostro, and S. Gigan, "Programmable linear quantum networks with a multimode fibre," *Nat. Photonics* **14**, 139–142 (2020).
335. S. R. Skinner, E. C. Behrman, A. A. Cruz-Cabrera, and J. E. Steck, "Neural network implementation using self-lensing media," *Appl. Opt.* **34**, 4129–4135 (1995).
336. E. Khoram, A. Chen, D. Liu, L. Ying, Q. Wang, M. Yuan, and Z. Yu, "Nanophotonic media for artificial neural inference," *Photon. Res.* **7**, 823–827 (2019).
337. Z. Wu, M. Zhou, E. Khoram, B. Liu, and Z. Yu, "Neuromorphic metasurface," *Photon. Res.* **8**, 46–50 (2020).
338. M. Nakajima, K. Tanaka, and T. Hashimoto, "Neural Schrödinger equation: physical law as deep neural network," *IEEE Trans. Neural Netw. Learn. Syst.* **33**, 2686–2700 (2022).
339. G. H. Y. Li, R. Sekine, R. Nehra, R. M. Gray, L. Ledezma, Q. Guo, and A. Marandi, "All-optical ultrafast ReLU function for energy-efficient nanophotonic deep learning," arXiv:2201.03787 (2022).
340. C. Schneider, K. Winkler, M. D. Fraser, M. Kamp, Y. Yamamoto, E. A. Ostrovskaya, and S. Hfing, "Exciton-polariton trapping and potential landscape engineering," *Rep. Prog. Phys.* **80**, 016503 (2016).
341. N. G. Berloff, M. Silva, K. Kalinin, A. Askitopoulos, J. D. Tpfar, P. Cilibrizzi, W. Langbein, and P. G. Lagoudakis, "Realizing the classical XY Hamiltonian in polariton simulators," *Nat. Mater.* **16**, 1120–1126 (2017).
342. A. V. Zasedatelev, A. V. Baranikov, D. Sannikov, D. Urbonas, F. Scafirimuto, V. Y. Shishkov, E. S. Andrianov, Y. E. Lozovik, U. Scherf, T. Sferle, R. F. Mahrt, and P. G. Lagoudakis, "Single-photon nonlinearity at room temperature," *Nature* **597**, 493–497 (2021).
343. Y. Kurman, R. Dahan, H. H. Sheinfux, K. Wang, M. Yannai, Y. Adiv, O. Reinhardt, L. H. G. Tizei, S. Y. Woo, J. Li, J. H. Edgar, M. Kociak, F. H. L. Koppens, and I. Kaminer, "Spatiotemporal imaging of 2D polariton wave packet dynamics using free electrons," *Science* **372**, 1181–1186 (2021).
344. V. Karanikolas, S. Suzuki, S. Li, and T. Iwasaki, "Perspective on 2D material polaritons and innovative fabrication techniques," *Appl. Phys. Lett.* **120**, 040501 (2022).
345. J. M. D. Cesar, P. Musumeci, X. Shen, R. J. England, and K. P. Wootton, "Optical design for increased interaction length in a high gradient dielectric laser accelerator," *Nucl. Instrum. Methods Phys. Res. A* **909**, 252–256 (2018).
346. M. M. Wefers, K. A. Nelson, and A. M. Weiner, "Multidimensional shaping of ultrafast optical waveforms," *Opt. Lett.* **21**, 746–748 (1996).
347. R. M. Koehl, T. Hattori, and K. A. Nelson, "Automated spatial and temporal shaping of femtosecond pulses," *Opt. Commun.* **157**, 57–61 (1998).
348. J. C. Vaughan, T. Feurer, and K. A. Nelson, "Automated two-dimensional femtosecond pulse shaping," *J. Opt. Soc. Am. B* **19**, 2489–2495 (2002).
349. J. Wang and Y. Z. Liang, "Generation and detection of structured light: a review," *Front. Phys.* **9**, 688284 (2021).
350. S. T. Cundiff and A. M. Weiner, "Optical arbitrary waveform generation," *Nat. Photonics* **4**, 760–766 (2010).
351. A. M. Weiner, "Ultrafast optical pulse shaping: a tutorial review," *Opt. Commun.* **284**, 3669–3692 (2011).
352. M. Mounaix, N. K. Fontaine, D. T. Neilson, and J. Carpenter, "Time reversal of optical waves," in *Frontiers in Optics* (Optical Society of America, 2019).
353. H. E. Kondakci and A. F. Abouraddy, "Self-healing of space-time light sheets," *Opt. Lett.* **43**, 3830–3833 (2018).
354. M. N. Ould, T. Mansuryan, H. Charles-Henri, M. Fabert, K. Krupa, A. Tonello, M. Ferraro, L. Leggio, M. Zitelli, F. Mangini, A. Niang, G. Millot, M. Papi, S. Wabnitz, and V. Couderc, "Spatiotemporal beam self-cleaning for high-resolution nonlinear fluorescence imaging with multimode fiber," *Sci. Rep.* **11**, 18240 (2021).
355. H. E. Kondakci and A. F. Abouraddy, "Diffraction-free space-time light sheets," *Nat. Photonics* **11**, 733–740 (2017).
356. C. Jollivet, A. Mafi, D. Flamm, M. Duparre, K. Schuster, S. Grimm, and A. Schulzgen, "Mode-resolved gain analysis and lasing in multi-supermode multi-core fiber laser," *Opt. Express* **22**, 30377–30386 (2014).
357. D. Lin, J. Carpenter, Y. T. Feng, S. Jain, Y. M. Jung, Y. J. Feng, M. N. Zervas, and D. J. Richardson, "Reconfigurable structured light generation in a multicore fibre amplifier," *Nat. Commun.* **11**, 3986 (2020).
358. A. Chong, W. H. Renninger, D. N. Christodoulides, and F. W. Wise, "Airy-Bessel wave packets as versatile linear light bullets," *Nat. Photonics* **4**, 103–106 (2010).
359. E. Recami and M. Zamboni-Rached, "Localized waves: a review," in *Advances in Imaging and Electron Physics* (2009), Vol. **156**, pp. 235–353.
360. L. A. Hall and A. F. Abouraddy, "Realizing normal group-velocity dispersion in free space via angular dispersion," *Opt. Lett.* **46**, 5421–5424 (2021).
361. A. Chong, C. H. Wan, J. Chen, and Q. W. Zhan, "Generation of spatiotemporal optical vortices with controllable transverse orbital angular momentum," *Nat. Photonics* **14**, 350–354 (2020).
362. L. A. Hall, M. Yessenov, and A. F. Abouraddy, "Arbitrarily accelerating space-time wave packets," *Opt. Lett.* **47**, 694–697 (2022).
363. M. Mounaix, N. K. Fontaine, D. T. Neilson, R. Ryf, H. S. Chen, J. C. Alvarado-Zacarias, and J. Carpenter, "Time reversed optical waves by arbitrary vector spatiotemporal field generation," *Nat. Commun.* **11**, 5813 (2020).
364. K. M. Dorney, L. Rego, N. J. Brooks, J. San Roman, C. T. Liao, J. L. Ellis, D. Zusin, C. Gentry, Q. L. Nguyen, J. M. Shaw, A. Picon, L. Plaja, H. C. Kapteyn, M. M. Murnane, and C. Hernandez-Garcia, "Controlling the polarization and vortex charge of attosecond high-harmonic beams via simultaneous spin-orbit momentum conservation," *Nat. Photonics* **13**, 123–130 (2019).
365. J. N. Kutz, C. Conti, and S. Trillo, "Mode-locked X-wave lasers," *Opt. Express* **15**, 16022–16028 (2007).

366. K. Krupa, A. Tonello, B. M. Shalaby, M. Fabert, A. Barthelemy, G. Millot, S. Wabnitz, and V. Couderc, "Spatial beam self-cleaning in multimode fibres," *Nat. Photonics* **11**, 237–241 (2017).
367. Z. Liu, L. G. Wright, D. N. Christodoulides, and F. W. Wise, "Kerr self-cleaning of femtosecond-pulsed beams in graded-index multimode fiber," *Opt. Lett.* **41**, 3675–3678 (2016).
368. K. Krupa, A. Tonello, V. Couderc, A. Barthelemy, G. Millot, D. Modotto, and S. Wabnitz, "Spatiotemporal light-beam compression from nonlinear mode coupling," *Phys. Rev. A* **97**, 043836 (2018).
369. Y. Leventoux, G. Granger, K. Krupa, A. Tonello, G. Millot, M. Ferraro, F. Mangini, M. M. Zitelli, S. Wabnitz, S. Février, and V. Couderc, "3D time-domain beam mapping for studying nonlinear dynamics in multimode optical fibers," *Opt. Lett.* **46**, 66–69 (2021).
370. E. V. Podivilov, D. S. Kharenko, V. A. Gonta, K. Krupa, O. S. Sidelnikov, S. Turitsyn, M. P. Fedoruk, S. A. Babin, and S. Wabnitz, "Hydrodynamic 2D turbulence and spatial beam condensation in multimode optical fibers," *Phys. Rev. Lett.* **122**, 103902 (2019).
371. H. Pourbeyram, P. Sidorenko, F. Wu, N. Bender, L. Wright, D. Christodoulides, and F. Wise, "Direct observations of thermalization to a Rayleigh–Jeans distribution in multimode optical fibers," *Nat. Phys.* **18**, 685–690 (2022).
372. L. G. Wright, Z. Liu, D. A. Nolan, M.-J. Li, D. N. Christodoulides, and F. W. Wise, "Self-organized instability in graded-index multimode fibres," *Nat. Photonics* **10**, 771–776 (2016).
373. F. Poletti and P. Horak, "Description of ultrashort pulse propagation in multimode optical fibers," *J. Opt. Soc. Am. B* **25**, 1645–1654 (2008).
374. A. Mafi, "Pulse propagation in a short nonlinear graded-index multimode optical fiber," *J. Lightwave Technol.* **30**, 2803–2811 (2012).
375. S. Dyachenko, A. C. Newell, A. Pushkarev, and V. E. Zakharov, "Optical turbulence: weak turbulence, condensates and collapsing filaments in the nonlinear Schrödinger equation," *Physica D* **57**, 96–160 (1992).
376. A. Picozzi, J. Garnier, T. Hansson, P. Suret, S. Randoux, G. Millot, and D. N. Christodoulides, "Optical wave turbulence: towards a unified nonequilibrium thermodynamic formulation of statistical nonlinear optics," *Phys. Rep.* **542**, 1–132 (2014).
377. T. J. Kippenberg, R. Holzwarth, and S. A. Diddams, "Microresonator-based optical frequency combs," *Science* **332**, 555–559 (2011).
378. B. Barviau, B. Kibler, S. Coen, and A. Picozzi, "Toward a thermodynamic description of supercontinuum generation," *Opt. Lett.* **33**, 2833–2835 (2008).
379. P. Aschieri, J. Garnier, C. Michel, V. Doya, and A. Picozzi, "Condensation and thermalization of classical optical waves in a waveguide," *Phys. Rev. A* **83**, 033838 (2011).
380. F. O. Wu, A. U. Hassan, and D. N. Christodoulides, "Thermodynamic theory of highly multimoded nonlinear optical systems," *Nat. Photonics* **13**, 776–782 (2019).
381. K. G. Makris, F. O. Wu, P. S. Jung, and D. N. Christodoulides, "Statistical mechanics of weakly nonlinear optical multimode gases," *Opt. Lett.* **45**, 1651–1654 (2020).
382. M. Parto, F. O. Wu, P. S. Jung, K. Makris, and D. N. Christodoulides, "Thermodynamic conditions governing the optical temperature and chemical potential in nonlinear highly multimoded photonic systems," *Opt. Lett.* **44**, 3936–3939 (2019).
383. K. Baudin, A. Fusaro, K. Krupa, J. Garnier, S. Rica, G. Millot, and A. Picozzi, "Classical Rayleigh–Jeans condensation of light waves: observation and thermodynamic characterization," *Phys. Rev. Lett.* **125**, 244101 (2020).
384. A. L. M. Muniz, P. S. Jung, F. O. Wu, M. Parto, M. Khajavikhan, D. N. Christodoulides, and U. Peschel, "Optical thermodynamics in nonlinear photonic lattices," in *Conference on Lasers and Electro-Optics*, OSA Technical Digest (Optica, 2020), paper FTh4A.1.
385. H. Pourbeyram, P. Sidorenko, F. O. Wu, D. N. Christodoulides, and F. W. Wise, "Optical thermalization in ultrashort pulse propagation in multimode fiber," in *Conference on Lasers and Electro-Optics*, OSA Technical Digest (Optica, 2020), paper SM1P.6.
386. R. Weill, B. Fischer, and O. Gat, "Light-mode condensation in actively-mode-locked lasers," *Phys. Rev. Lett.* **104**, 173901 (2010).
387. R. T. Q. Chen, Y. Rubanova, J. Bettencourt, and D. K. Duvenaud, "Neural ordinary differential equations," in *Advances in neural information processing systems 31 (NeurIPS)* (2018).
388. E. Weinan, "A proposal on machine learning via dynamical systems," *Commun. Math. Stat.* **1**, 1–11 (2017).
389. G. Furuhashi, T. Niiyama, and S. Sunada, "Physical deep learning based on optimal control of dynamical systems," *Phys. Rev. Appl.* **15**, 034092 (2021).
390. J. S. Jensen and O. Sigmund, "Topology optimization for nano-photonics," *Laser Photon. Rev.* **5**, 308–321 (2011).
391. K. Y. Yang, A. D. White, F. Ashtiani, *et al.*, "Inverse-designed multi-dimensional silicon photonic transmitters," arXiv:2103.14139 (2021).
392. J. Jiang, M. Chen, and J. A. Fan, "Deep neural networks for the evaluation and design of photonic devices," *Nat. Rev. Mater.* **6**, 679–700 (2021).
393. P. R. Wiecha, A. Arbouet, C. Girard, and O. L. Muskens, "Deep learning in nano-photonics: inverse design and beyond," *Photon. Res.* **9**, B182–B200 (2021).
394. D. Piccinotti, K. F. MacDonald, S. A. Gregory, I. Youngs, and N. I. Zheludev, "Artificial intelligence for photonics and photonic materials," *Rep. Prog. Phys.* **84**, 012401 (2020).
395. W. Ma, Z. Liu, Z. A. Kudyshev, A. Boltasseva, W. Cai, and Y. Liu, "Deep learning for the design of photonic structures," *Nat. Photonics* **15**, 77–90 (2021).
396. U. Tegin, N. U. Din, C. Moser, and D. Psaltis, "Reusability report: predicting spatiotemporal nonlinear dynamics in multimode fibre optics with a recurrent neural network," *Nat. Mach. Intell.* **3**, 387–391 (2021).