



## Review

## Microplastics in landfill leachate: Sources, detection, occurrence, and removal



Mosarrat Samiha Kabir <sup>a</sup>, Hong Wang <sup>b, c</sup>, Stephanie Luster-Teasley <sup>d</sup>, Lifeng Zhang <sup>a, \*\*</sup>, Renzun Zhao <sup>d, \*</sup>

<sup>a</sup> Department of Nanoengineering, North Carolina Agricultural and Technical State University, Greensboro, NC, 27411, USA

<sup>b</sup> State Key Laboratory of Pollution Control and Resource Reuse, College of Environmental Science and Engineering, Tongji University, Shanghai, 200092, China

<sup>c</sup> Shanghai Institute of Pollution Control and Ecological Security, Shanghai, 200092, China

<sup>d</sup> Civil, Architectural and Environmental Engineering Department, North Carolina Agricultural and Technical State University, Greensboro, NC, 27411, USA

## article info

## Article history:

Received 30 September 2022

Received in revised form

15 February 2023

Accepted 15 February 2023

## Keywords:

Landfill leachate

Microplastics

Source

Detection

Occurrence

Treatment

## abstract

Due to the accumulation of an enormous amount of plastic waste from municipal and industrial sources in landfills, landfill leachate is becoming a significant reservoir of microplastics. The release of microplastics from landfill leachate into the environment can have undesirable effects on humans and biota. This study provides the state of the science regarding the source, detection, occurrence, and remediation of microplastics in landfill leachate based on a comprehensive review of the scientific literature, mostly in the recent decade. Solid waste and wastewater treatment residue are the primary sources of microplastics in landfill leachate. Microplastic concentration in raw and treated landfill leachate varied between  $0e382$  and  $0e2.7$  items  $L^{-1}$ . Microplastics in raw landfill leachate are largely attributable to local plastic waste production and solid waste management practices. Polyethylene, polystyrene, and polypropylene are the most prevalent microplastic polymers in landfill leachate. Even though the colors of microplastics are primarily determined by their parent plastic waste, the predominance of light-colored microplastics in landfill leachate indicates long-term degradation. The identified morphologies of microplastics in leachate from all published sources contain fiber and fragments the most. Depending on the treatment method, leachate treatment processes can achieve microplastic removal rates between 3% and 100%. The review also provides unique perspectives on microplastics in landfill leachate in terms of remediation, final disposal, fate and transport among engineering systems, and source reduction, etc. The landfill wastewater treatment plant loop and bioreactor landfills present unique difficulties and opportunities for managing microplastics induced by landfill leachate.

© 2023 The Authors. Published by Elsevier B.V. on behalf of Chinese Society for Environmental Sciences, Harbin Institute of Technology, Chinese Research Academy of Environmental Sciences. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

## 1. Introduction

Over 335 million tons of plastic are produced annually globally, making it an indispensable component of modern life [1]. Plastics will be widely used despite initiatives to reduce their usage due to their portability, durability, and low cost. COVID-19 has boosted the usage of plastic in personal protective equipment (PPE), such as facemasks and gloves [2e4]. Plastic garbage enters aquatic and terrestrial areas, threatening ecosystems and possibly endangering

biota and humans [5,6]. In the environment, plastics degrade with time through physical, chemical, and biological processes (i.e., hydrolysis, photodegradation, thermal oxidation, mechanical abrasion, and biodegradation) [7]. As plastics deteriorate, their size reduces, and microplastics (MPs) and nanoplastics (NPs) are generated, making the problem less evident but more harmful.

Plastics  $<5$  mm are defined as microplastics, and nanoplastics are plastics with particle sizes ranging in sub-micron scale. Nevertheless, the precise scientific definition of NPs is still under discussion, with the size being described as either 100 or 1000 nm in one dimension. The first detection of MPs was made in oceans [8]. An estimated 5 trillion MP particles are weighing 243,000 tons floating in the water due to MP degradation and deposition, posing

\* Corresponding author.

\*\* Corresponding author.

E-mail addresses: [lzhang@ncat.edu](mailto:lzhang@ncat.edu) (L. Zhang), [rzhao@ncat.edu](mailto:rzhao@ncat.edu) (R. Zhao).

a lethal threat to marine life [9]. Several investigations have also identified NPs in the marine environment [10]. In addition to the ocean, the abundance of MPs has been identified in every other environmental media, including wastewater, drinking water, surface water, and landfill [1,9,11,12].

The toxic effects of MPs are well documented in the environment [6,13,14]. Due to the increasing concerns about the global impacts of MPs, many studies are going on, and documents are available on the occurrence and treatment of MPs in different environmental systems. Landfills receive a large number of MPs from several primary and secondary sources. Many other pollutants are also present in landfills that can be adsorbed by the MPs. MPs from landfill might infiltrate leachate via rainwater. If not properly engineered, MPs may percolate to groundwater or other terrestrial locations. Landfills have also been identified as a source of MPs input to the marine environment [15]. However, landfill as a contamination source and hotspot of MPs is less explored than other aquatic environments, as current research mostly focused on the fields of water (ocean, surface, and groundwater) and wastewater [16e21]. This study critically reviewed some available scientific literature on MPs in landfill leachate and provides state-of-the-science regarding the source, occurrence, and remediation of MPs in landfill leachate.

## 2. Source of microplastics in landfill leachate

The two principal sources of MPs in landfill leachate are solid waste and wastewater treatment plant residual, e.g., sludge and fat, oil, and grease (FOG), etc. [22]. Plastic waste dumped in landfills can go through several abrasive activities and produce secondary microplastics. MPs can also enter into landfill from numerous primary sources. Wastewater is also a significant collection point for MPs [20]. MPs can get entrapped in FOG and solid sludge during the treatment process. Upon disposal in landfills, sludge and FOG from sewage can augment the abundance of MPs in landfill leachate [23]. Fig. 1 demonstrates the sources of microplastics in the landfill leachate microplastics from solid waste.

At the end-of-life of plastic products, the best possible and most desired approach is recycling. However, only 15e20% of all plastic

waste can be effectively recycled using conventional technologies worldwide, and approximately 21e42% is deposited in landfills [12,24]. In 2018, landfills in the US received 27 million tons of plastic waste [25]. Though some plastic products are marked as "biodegradable" nowadays, their complete breakage is only possible when composted in industrial units specifically designed for polymer's molecular breakdown, the biodegradation of these products in landfills is limited [26]. All the waste undergoes numerous treatment stages in landfills: initial aerobic biodegradation, a transition from aerobic to anaerobic condition, acid formation and hydrolysis, methanogenesis to form methane, and final maturation and stabilization [27]. Each stage accelerates the rate of plastic breakage and produces secondary MPs [28]. Furthermore, different anthropogenic activities associated with mass-produced MPs/NPs, such as microbeads from pharmaceuticals and personal care products (PPCPs), shampoos, shower gels, lipsticks, sunscreens, masks, eye shadows, or other intentionally produced microparticles for particular purposes, often end up in landfills. Waste generated from dedicated industries and facilities that handle these products can also be a source of primary microplastics in the landfill leachate.

### 2.1. Microplastics from the wastewater treatment plant

Microplastic existence ranges up to 3160 particles L<sup>-1</sup>, 125 particles L<sup>-1</sup> and 170.9 10<sup>3</sup> particles kg<sup>-1</sup> of total solid dry weight (TS dw) in untreated wastewater treated wastewater and sludge, correspondingly [29]. Most MPs got trapped in the FOG flocs during treatment stages and/or settle downs in sludge [30e33]. While low-density MPs get trapped in FOG during skimming, the high-density MPs settle down with sludge [28]. 60e99% of MPs from wastewater sources are detained in the sludge from wastewater treatment plants (WWTPs) [30e33]. From management and materials handling standpoint, landfilling is one of the most straightforward solutions for sludge disposal [34]. Based on the biosolid program report of 2019, around 22% of the sewage sludge is disposed of in landfills [35]. According to the same report, approximately 4.75 million dry metric tons of biosolids were

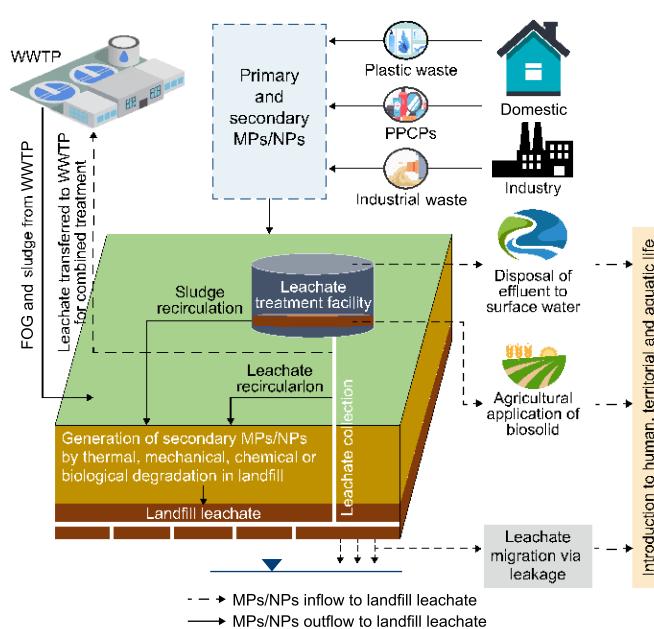


Fig. 1. Source and environmental pathways of microplastics via landfill leachate.

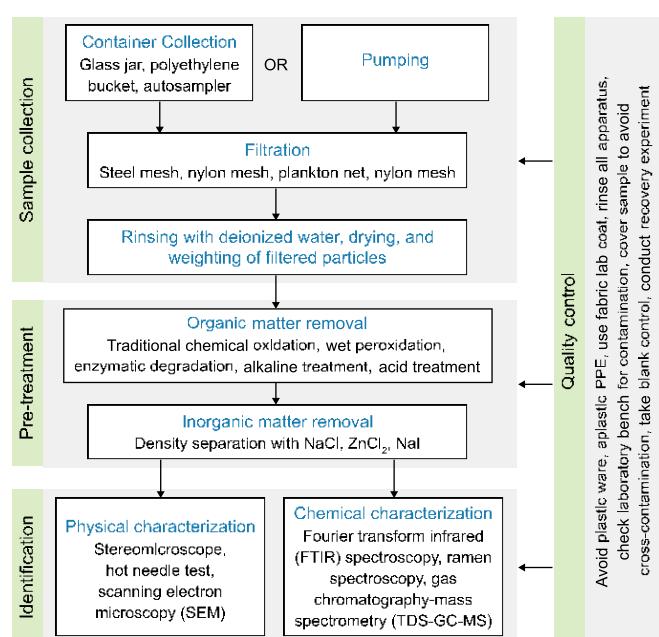


Fig. 2. Flow chart summarizing the analysis steps of microplastics in landfill leachate.

**Table 1**  
Current extraction, quantification, and characterization method of MPs in landfill leachate.

Country	Sampling location	Volume (L)	Sampling technique	Reported MP size range	Filter type and size	Organic matter removal	Inorganic matter removal	Quantification and characterization method	References
China	Collecting well or/and equalization basin	24	PE bucket	100e5000 mm	SS sieves with mesh sizes of 150, 75, 45, and 25 mm 0.45 mm filter paper	WOP: 0.05 M Fe (II) $\pm$ 30% H <sub>2</sub> O <sub>2</sub>	DS: NaI	ATR-FTIR, m-FTIR	[37]
China	-	3	-	-	47 mm and 20 mm Nylon membrane filter	CO: 30% H <sub>2</sub> O <sub>2</sub>	-	ATR-FTIR, m-FTIR, stereomicroscope with AxioCam digital camera	[38]
China	Equalization basin, bioreactor, membrane tank, final effluent, rejected water of RO system	1 (raw leachate), 40 (treated leachate)	Glass jar	20e100 mm	SS sieves with mesh sizes of 150 mm and 10 mm	WOP: 0.05 M Fe (II) $\pm$ 30% H <sub>2</sub> O <sub>2</sub>	DS: ZnCl <sub>2</sub>	m-Raman spectrometer, optical microscope	[39]
China	Equalization basin, adjustment tank, membrane bioreactor, ultrafiltration, nanofiltration, and reverse osmosis effluent	5	-	0.5e5 mm	Mesh sieve of 48 mm, 20 mm filter paper	CO: 30% H <sub>2</sub> O <sub>2</sub>	-	ATR-FTIR, SEM, stereomicroscope with AxioCam digital camera	[40]
Indonesia	Leachate pond, leachate drain	-	HDPE bottle	80e5000 mm	SS sieves with mesh sizes of 5 mm, 200 mm, and 20 mm 0.45 mm cellulose nitrate filter paper	WOP: 0.05 M Fe (II) $\pm$ 30% H <sub>2</sub> O <sub>2</sub>	DS: NaCl	m-FTIR, microscope with camera	[41]
India	Groundwater	1	Glass bottle	1000e5000 mm	0.45 mm cellulose nitrate filter paper	-	-	ATR-FTIR, SEM, stereomicroscope with camera	[42]
Thailand	Leachate pond	-	-	-	SS sieves with mesh sizes of 330 mm	WOP: 0.05 M Fe (II) $\pm$ 30% H <sub>2</sub> O <sub>2</sub>	DS: NaCl	FTIR, stereomicroscope	[43]
France	Coast near landfill	1000e2000	Pumping	20e5000 mm	SS sieves with mesh sizes of 500 mm, 200 mm, 80 mm and 20 mm	-	DS: ZnCl <sub>2</sub>	m-Raman spectrometer, stereomicroscope with camera	[15]
Finland	Settlement pond, pump station	10, 80, 120	Pumping	50e500 mm	SS sieves with mesh sizes of 5000, 411, and 47 mm	CO: H <sub>2</sub> O	-	ATR-FTIR	[44]
Finland	Pump station	70, 109	Pumping, PE bucket	-	-	-	-	-	-
Finland	Leachate pond, outflow pipe	70, 120	Pumping, PE bucket	-	-	-	-	-	-
Norway	Pump station	20, 5	Pumping	-	-	-	-	-	-
Norway	Well, pump station	10, 40	Pumping	-	-	-	-	-	-
Iceland	Borehole, outflow pipe	295, 55	Pumping	-	-	-	-	-	-
Iceland	Leachate pond outflow pipe	44, 307	Pumping	-	-	-	-	-	-
Bosnia and Herzegovina	Receiving basin	2.5	Pumping, glass bottle	-	Plankton net of nylon mesh material with pore size 23 mm	WOP: 0.05 M Fe (II) $\pm$ 30% H <sub>2</sub> O <sub>2</sub>	DS: ZnCl <sub>2</sub>	Stereomicroscope	[45]
Serbia	Sedimentation and aeration lagoon	2.5	Pumping, glass bottle	-	-	-	-	-	-
Serbia	Leachate lagoon	2.5	Pumping glass bottle	-	-	-	-	-	-

Abbreviations: SS, stainless steel; CO, chemical oxidation; WOP, wet peroxidation; DS, density separation.

produced in the US in 2019 [35]. During wastewater treatment, a significant quantity of MPs is retained in sludge. Therefore, landfilling sludge from WWTPs can deliver a substantial number of MPs in landfill leachate. According to the average reported MP concentration in sludge from the US, approximately  $2.5 \times 10^{12}$  items per gram of MPs can be delivered to landfills via WWTP sludge each year (assuming the MP counts from Rolsky et al. [36]). Thus, even though sludge is a sink of MPs for WWTPs, it is an enormous source of MPs to landfills leachate.

### 3. Detection of microplastics in landfill leachate

The detection of MPs in landfill leachate generally contains three steps, i.e., sample collection, sample pretreatment, and MP characterization/quantification, as summarized in Fig. 2. However, the method applied in each step for the leachate sample is not standardized yet. Studies used techniques according to sample characteristics, available resources, and research goals. Most studies maintained quality control to avoid potential leachate sample contamination and sample loss bias.

#### 3.1. Sample collection

Container collection (polyethylene bucket or glass bottle) is the most reported method in landfill leachate studies (Table 1) due to its straightforwardness. However, collection capacity is limited in container collection practice. Generally, only a few liters per collection event are possible with containers. If the leachate contains high organic matter content and solids, such as the untreated leachate sample, given the ease of the following filtration process, container collection is more appropriate [20]. Autosampler collection is another straightforward method reported in wastewater sample collection for MP analysis and could also be suitable for leachate sample collection. However, it poses the same limitations as container collection [20,33,46]. Depending on the mesh size and leachate characteristics, pumping can effectively increase the sampling volume. With pumping, up to 2000 L of leachate sample collection has been reported [44].

Separate or simultaneous filtration with steel, nylon, or plankton nets is conducted while sampling [46,47]. For leachate filtration, steel meshes are commonly reported (Table 1). Filtration using the different sieves of mesh size between 150 mm and 10 mm has been reported. Plankton nets are also mentioned in some literature [45]. Sample collection with custom-made filtering houses with meshes of varying sizes employing concurrent sample collection and filtration is also a popular technique [8,44]. Applying different series of sieves ensures MP characterization based on their sizes. However, the mesh-based size categorization can be highly biased. Some MP particles might not pass through the sieves even if sufficiently small due to their irregular shapes [46]. Moreover, unique morphology, like fibers, can pass vertically through a small sieve and promote inaccuracy in the outcome [48].

The volume of the collected leachate sample varies between milliliters and liters [38]. The sample volume collected for raw and treated leachate is generally different. A large volume of raw leachate typically contains a high organic load content which may clog filters faster. On the other hand, a higher volume can be collected for treated leachate as it contains fewer pollutants. Moreover, treated leachate is expected to have fewer microplastics. Hence, it is wise to sample larger volumes, especially if a large particle is targeted to be identified [47,49].

A sample might have uneven temporal and spatial distributions of MPs in leachate [20]. A sample's representativeness can be increased by collecting large volumes, taking a 24-h composite sample, adjusting the sampling frequency, and sampling mode

corresponding to the goal of the study [33,46,50]. As landfill leachate is a complex liquid, a microplastics sampling guide is highly recommended to be developed for prescribing appropriate sampling mode and frequency depending on the sample characteristics to reduce sampling inaccuracies and increase data quality.

#### 3.2. Pretreatment of sample

##### 3.2.1. Organic matter removal

Landfill leachate is rich in particles or organic suspended matter, interfering with the detection and characterization process. To count and characterize MPs properly, non-plastic material needs to be removed by chemical pretreatment. The organic matter from the sample are mostly removed by conventional chemical oxidation, novel wet peroxidation, enzymic degradation, and acid or alcohol hydrolysis [39,51e53]. Inorganic matter is mostly removed using the density separation technique. Fig. 2 summarizes the conventional pretreatment methods available for leachate samples.

Conventional oxidative treatment is the standard digestion process to remove organic matter. Chemicals, including  $H_2O_2$ ,  $NaClO$ , etc., are usually utilized as oxidizing reagents [54e56]. However, chemicals that can dissolve the biological substance while maintaining the integrity of microplastics are limited for conventional oxidative treatments. Some oxidizing chemicals might react with some particular polymers. So far,  $H_2O_2$  has shown the best performance degrading organic matter without denting considerable microplastics [57]. The traditional procedure is to apply 30%  $H_2O_2$  for the pretreatment to isolate MPs from the sample [38,44]. However, the reaction rate of this  $H_2O_2$  pretreatment process is slow. Therefore, this method might not be practical for samples containing extensive organic matter like landfill leachate due to prolonged treatment time. To accelerate the reaction rate, moderate heat for a short period (30 min) can be applied [58]. Even though utilizing heat for the progression of the conventional chemical oxidation process for leachate study is scarce, the result should be promising for analyzing MPs in leachate. However, applied heat may melt some tiny MPs and alter the findings [58].

National Oceanic and Atmospheric Administration (NOAA) employed a new technique called wet peroxidation (WPO) to increase the efficiency and reduce the pretreatment time of the traditional oxidation process. This method is also widely used to isolate microplastic from samples collected from freshwater, seawater, wastewater, landfill leachate, sediments, and organisms [37,57,59e61]. In WPO, a ferrous catalyst is used along with  $H_2O_2$  for oxidation. NOAA laboratory applied equal amounts (20 mL) of 30%  $H_2O_2$  and 0.05 M  $Fe^{2+}$  (Fenton reagent) for the water sample. Simultaneous mixing and heating are then conducted to complete the digestion [61]. The majority of microplastics are considered to remain unaffected with WPO while reducing oxidation time from days to hours or minutes. For extraction and identification of microplastics in leachate, in some cases, a modification of NOAA laboratory methods is applied by adjusting the amount of the chemical documented in the original method [37]. To prevent the chance of violent boiling at the beginning of the reaction, WPO should be started in a cold bath for safety [39]. In some studies, wet peroxidation is conducted multiple times for better results [39].

Other potential digestion methods for MP analysis from landfill leachate are enzymatic degradation, acid, and alkaline treatment. An enzymatic degradation is an emerging approach for removing organic matter from the aqueous sample. Oxidative enzymatic degradation is conducted using enzymes, such as lipase, proteinase, cellulase, chitinase, and amylase. Enzymatic degradation is evidenced to remove a high amount of organic matter [51,62] with minimum to no degradation MPs in the wastewater sample matter

[51,62]. However, no research employed enzymatic degradation to isolate MPs from landfill leachate samples. The reason could be the high cost of enzymes, the complexity of the process (multi-step process), and the prolonged treatment time (13 days for wastewater sample) of the method, which could be further delayed for an increased amount of organic matter in the sample like landfill leachate [48,63].

### 3.2.2. Inorganic matter removal

Following the oxidation process, density separation is conducted to remove the inorganic substance. The mechanism is to float MPs in a solution of higher density than the targeted polymers. The density of common polymers mainly varies from 0.90 to 1.6 g cm<sup>3</sup>. The common salts used for density separation are sodium chloride (NaCl), sodium iodide (NaI), sodium polytungstate (SPT), and zinc chloride (ZnCl<sub>2</sub>). The salt is selected based on the density of the targeted polymer for extraction. For example, NaCl (density: 1.2 kg L<sup>-1</sup>) is used to separate low-density polymers, such as polyethylene, polystyrene, and polypropylene, where NaI (density: 1.6e1.8 kg L<sup>-1</sup>) or ZnCl (density: 1.5e1.7 kg L<sup>-1</sup>) extract heavy polymer, such as polyethylene terephthalate (PET) and polyvinyl chloride (PVC).

Most importantly, separating organic matter and inorganic matter from the leachate sample to isolate MPs should be conducted without causing any damage to MPs. Currently, there is no existing pretreatment guideline for leachate pretreatment. Studies conducted on the pretreatment of leachate samples are based on experience from other water and wastewater samples [39,43,44]. However, the chemical composition of landfill leachate is very different from other sources. Unlike municipal wastewater, landfill leachate generally contains a higher level of ammonia, chemical oxygen demand, and metals, which can interfere with the traditional pretreatment process [37]. Thus, a standardized methodology designed for the pretreatment process of landfill leachate is necessary.

### 3.3. Microplastic characterization and identification

A complete characterization of MPs from landfill leachate should define the physical (shape, size, and color) and chemical (polymer composition) properties of MPs. It is difficult to conduct a complete characterization for MP complex matrices such as landfill leachate using a single identification technique. Thus, a combination of analytical methods has often been used.

For physical characterization, visual identification with the naked eye is the simplest approach. The microplastic size range of 2e5 mm can be characterized by the naked eye [64]. However, the detection method is size-limited and error-prone, thus challenging for identifying MPs from the complex environmental matrix as landfill leachate. In leachate analysis, the stereomicroscope is the most used instrument for counting and classifying physical characteristics like microplastic size, shape, color, and surface morphology (Table 1). Nevertheless, stereoscopic microscopes are also susceptible, especially with samples burdened with a high level of organic matter. Hidalgo-Ruz et al. [65] estimated that up to a 70% error ratio could be observed if used only stereomicroscope for identification. Furthermore, the rate of error increased with the decreasing particle size. Transparent tiny particles (<100 mm) or fibrous MPs are hard to identify with stereoscopic microscopes [66]. Therefore, using a stereomicroscope as the only identification instrument to study leachate is unreliable, as landfills have an abundance of such particles. For complex environmental samples, associating scanning electron microscopy (SEM) can facilitate analysis by providing high-resolution images of the microplastic particles [67]. Transparent and high-magnification of images

characterize microplastics' surface morphology and differentiate microplastics from organic particles. Nevertheless, the color of microplastic cannot be identified by SEM tests [68]. Moreover, SEM-based procedures are expensive, time-consuming, and require substantial effort for sample preparation and examination, limiting the number of samples tested [69].

For chemical characterization, Fourier transforms infrared (FTIR) spectroscopy is the most used instrument for analyzing microplastic in landfill leachate. By utilizing an encoded polymer spectrum library, FTIR spectroscopy can confirm the presence of plastic particles and identify specific polymer types. Depending on the targeted size, a different mode of FTIR has been used. He et al. [36] applied attenuated total reflectance (ATR) mode (ATR-FTIR) for evaluating MPs with a size greater than 1 mm and Micro-FTIR (m-FTIR) for assessing MPs with a size less than 1 mm. For tinier MPs (<1 mm), another means is Raman spectroscopy [70]. It detects the polymer composition of a sample by analyzing the chemical bond polarity of the particle. The projection of a laser beam on a particle in different frequencies of back-scattered light produces a unique spectrum for each polymer depending on the molecular structure and atoms present [71,72]. However, possible interference resulting from foreign bands and fluorescence from dyes and pigments can interfere with the accuracy of the readings [73]. Micro-Raman spectroscopy can detect particles smaller than 20 mm [72]. Kazour et al. [15] used Raman spectroscopy and detected MPs in the range of 20e500 mm from the surface water sample adjacent to a coastal landfill.

### 3.4. Quality assurance

Due to the omnipresence of MPs in the surroundings, quality control is mandatory to minimize cross-contamination and acquire reliable results. To minimize contamination, all apparatuses used in the sampling and extraction processes (such as sampling containers, glassware, stainless sieves, Petri dishes, tubes, and vacuum filters) should be rinsed thoroughly with deionized water [37,39] or Mili-Q water and Ethanol [45] for several times before and in between sampling. The apparatus should be immediately covered with aluminum foil after cleaning and during the procedure [37,39,45]. After sampling, the filters are safer positioned in glass Petri dishes to protect from atmospheric MPs [39]. Measurements can be taken to quantify the airborne MPs as a precaution. Moreover, to avoid the contamination of airborne microplastics, sorting suspicious particles can be conducted in a vertical flow cabinet (P [37]. The liquid chemicals used in the study should be filtered before use. Nitrile gloves and clean lab coats of natural fabrics should be worn throughout the sampling, pretreatment, and identification process [37,39,45]. Sampling equipment, either a plastic container or pumping equipment (PVC hose or power cable), can cause cross-contamination. Therefore, multiple blank samples should be taken to detect possible sources of contamination during sampling, and the same identification procedure should be conducted as the leachate sample. For future reference, the presence of plastic materials used at or in the locality of the sampling point should be documented (photographed and identified).

## 4. Occurrence of micro-/nanoplastics in landfill leachate

### 4.1. The concentration of MPs in landfill leachate

MPs were detected in both raw and treated landfill leachate. The detected MPs in untreated and treated landfill leachate varied between 0e382 and 0e2.7 items L<sup>-1</sup>, respectively (Table 2). This high variation of concentration might be contributed to the difference in sampling strategy, analytical technique, or leachate treatment

Table 2

Concentration and treatment of MPs in landfill leachate on a global scale.

Landfill description					Treatment process	MP concentration			References
Country	Landfill location	Number of landfills	Landfill type	Landfill status		Untreated leachate (items L <sup>-1</sup> )	Treated leachate	% Removal	
China	Shanghai, Wuxi, Suzhou, Changzhou	6	MSW	Non-haz, active, closed	-	0.42-24.58	-	-	[37]
China	Shanghai	1	MSW	Non-Haz	-	4-13	-	-	[38]
China	Suzhou	1	MSW	Non-haz	Membrane bioreactor with activated sludge, nanofiltration, reverse osmosis	235.4 ± 17.1	0.4 ± 0.1	99.8%	[39]
China	Shanghai	1	MSW	Non-haz	Membrane bioreactor (Anoxic/Oxic), ultrafiltration, nanofiltration, reverse osmosis	1.2 ± 0.57	0.6	50%	[40]
Indonesia	Bogor City	1	MSW	Non-haz	-	-	-	-	[41]
India	Chennai	2	MSW	-	-	2-80	-	-	[42]
France	Dollemard Coast	1	MSW, IW, SP	-	-	6	-	-	[15]
Finland	Turku, Salo, Lahti	3	MSW, IW	Non-haz	-	0.16-1.10	-	-	[44]
Finland	South-east	1	IW	Haz	Filtration and activated carbon	0.30	0.32	3%	
Finland	Lahti	1	MSW, IW	Non-haz	Artificial soil filtration	1.97	0.03	99%	
Norway	Skedsmokorset	1	MSW, IW	Non-haz	Sequence batch reactor	1.3	0	100%	
Norway	Ask, Anonymous	2	MSW, IW, mixed	Non-haz	-	1-4	-	-	
Ice land	Fiflholt	1	MSW, IW	Non-haz	Sand bed filtration	0.2	0.06	76%	
Iceland	Alfsnes Fiflholt	2	MSW, IW	Non-haz	-	0-4.51	-	-	
Sweden	-	-	-	-	-	-	0-2.7	-	[74]

Abbreviations: MSW, municipal solid waste; IW, industrial waste; SP, special waste.

process. Moreover, the complexity of the waste composition in landfill highly influences MP concentration and compositions in leachate. High variation of MP concentration is also reported in wastewater. For wastewater, the reported MPs varied between 1e3169 and 0.0007e125 item L<sup>-1</sup> for raw and treated wastewater, respectively [29]. The MP abundance in untreated and treated landfill leachate is lower than in untreated and treated wastewater. One possible reason is that the fragmentation of plastics and MPs in landfill strata influences the higher abundance of smaller MPs/NPs than sewage, which is not detected by the currently used methods and is not reflected in the number-based concentration reports.

Landfill age or status may influence the concentration of MPs in leachate. For example, Su et al. [38] found that the average MPs abundances in younger landfills were higher (8e10 items L<sup>-1</sup>) than the number of MPs (4 items L<sup>-1</sup>) in leachate from older landfills. The growing trend of plastic use could be a possible reason behind this observation. The global production of plastic waste increased by 26% from 2010 to 2016, and the occurrence of plastic in solid waste raised to 12% globally, rocketing 242 metric tons in 2016 [75]. Plastic waste comprises 2.95e21.76% of solid waste in landfill. Consequently, higher plastic waste is reported in active landfills than in older or closed landfills [76]. Received plastic waste undergoes fragmentation in landfills and produces secondary MPs with time, which percolate in leachate. However, the microbial breakdown of polymer with time in landfills might be another possible reason for the lower concentration of MPs in the leachate of older landfills [77]. Meanwhile, the scant detection of tinier particles in currently available studies might partially account for this observation. Due to analytical complexity, most leachate studies conducted the MP analysis with sizes ranging 50e5000 mm (Table 1), with tinier MPs or NPs largely ignored and undetected in old landfills.

Studies indicated geographical variation in MP concentration in landfill leachate, which could be related to regional plastic generation. A survey conducted in 2010 showed that the highest plastic waste-generating country in Europe is Germany, which produces 14.48 million tons of plastic waste annually. In China, the plastic waste generation was 59.08 million tons per year [78], and the measured microplastics concentration from China varied between

0.4 and 235.4 items L<sup>-1</sup> [37e39]. In comparison, the concentration range of MPs in the leachates from Nordic countries was 0e4.5 items L<sup>-1</sup> (Iceland, Norway, and Finland), while the concentration range of MPs in the leachates from different regions of China varied between 0.42 and 235.4 items L<sup>-1</sup> [44] (Table 2). The higher generation of plastic waste in China is one of the main contributors to higher MP abundance in leachate compared to European countries.

The local waste management approaches could be another crucial factor in MP concentration in leachate. The average MP concentration from Southeast European countries (Serbia, Bosnia, and Herzegovina) is three orders of magnitude higher than in Nordic countries (Finland, Iceland, and Norway) (Table 2). This could be the consequence of systematic waste management practices in developed countries, while proper sorting during waste collection is not entirely applied in developing countries such as Serbia, Bosnia, and Herzegovina [45]. Cenk and Fikret [79] investigated the municipal waste management of 35 European countries regarding four treatment approaches d recycling, composting, landfilling, and incineration (2012 database). The result revealed that the primary municipal solid waste treatment process for Serbia, Bosnia, and Herzegovina is landfilling. In contrast, waste recycling is much higher in Iceland, Norway, and Finland than in Serbia, Bosnia, and Herzegovina. In addition to recycling, the rate of waste incineration in Norway is the highest among all countries. The compost preparation is also higher in Nordic countries (Finland, Iceland, and Norway) than in Southeast European countries (Serbia, Bosnia, and Herzegovina). Another report mentioned that Serbia is experiencing the sharpest decline in municipal waste recycling in Europe. The current recycling rate of the county is only 0.4%. All these scenarios are attributed to the abundance of MPs between developed Nordic and developing Southeast European countries.

#### 4.2. Polymer composition

More than 28 kinds of polymers were identified in the leachates of different landfills (Fig. 3). Among all types of polymers, studies indicate that low-density polyethylene (LDPE), high-density polyethylene (HDPE), polystyrene (PS), polypropylene (PP), PVC, and

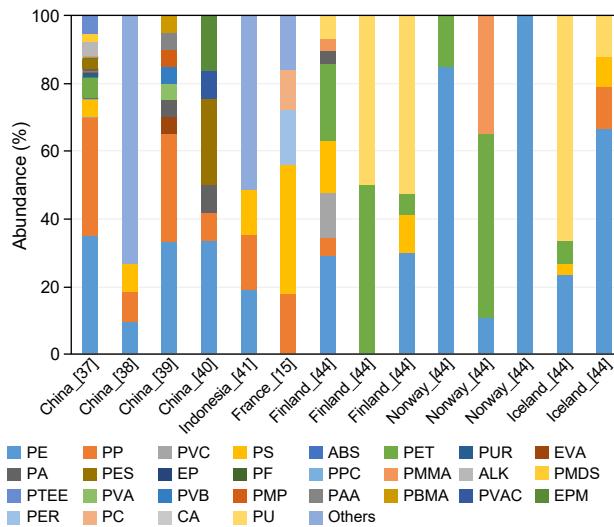


Fig. 3. Polymer composition of microplastics in landfill leachate worldwide. The number after each country's name is the reference number.

PET are the most abundant plastic polymers in the landfill leachate worldwide [8,37e39].

The polymer composition is directly related to the contemporary application of polymeric materials in anthropogenic uses. Due to their unique property and cost-effectiveness, the polymers mentioned above are extensively used for various short-term use products like shopping bags (PE), water bottles (PET), disposable drinking cups (PS), etc. Due to its high flexibility, PVC is widely used in different sectors like construction, waterproofing, medical equipment, clothing, toys, and other sports supplies [80,81]. The polymer composition in landfill leachate is similar to that in wastewater. The most occurring MPs in wastewater are polyester (PES) (60e96%), polyamide (PA) (3e20%), PE (64e78%), PP (20e100%), and PS (12e80%) and other polymers, such as alkyd and acrylic [11]. Wearing synthetic clothes during washing is one of the significant sources of PES and PA. Facial and body wash contains PE and PP. Packaging films and water bottles also include PE. Car wash and cosmetic products can contribute to PP [28].

Polymer types in landfill leachate may depend on the regional difference of Municipal Solid Waste (MSW) composition and condition of the landfill (young/old, active/closed). The polymer composition of leachate directly reflects the pattern of the current consumption scenario of plastic products. Moreover, the forthcoming MPs contamination in leachate can also be projected from the everyday use of the plastic polymer. Su et al. [38] compared MPs in leachate generated from landfills of different ages. Unlike PE and PP, Polyether Urethane (PEUR) in the younger landfill was more abundant in the older ones. In contrast, in samples from older landfill leachate, PEUR was undetected. This finding might be attributed to the change in application fields and the lifetime of various plastic products. Due to good mechanical and fiber-producing ability, the use of PEUR is increasing every year. PEUR is primarily used in the transportation and construction sector and has a longer lifespan (up to 35 years) compared to traditional packaging polymers like PE and PET (0.5 years) [82].

The polymer composition can influence the fate of MPs along the leachate treatment processes. For instance, commonly, higher-density polymers are more likely to accumulate in sludge, while polymers with lower density are more prone to pass with treated effluent. For example, as the density of PES ( $1.37 \text{ gm cm}^{-3}$ ) is higher than PE ( $1 \text{ gm cm}^{-3}$ ), more PES can be expected to settle down in

the leachate sludge compared to PE. Moreover, the polymer composition is also crucial to evaluate the effects of different treatment methods on the removal efficiency of MPs. For instance, granular activated carbon (GAC) utilizes the polarity of solids, and therefore, non-polar MPs, like PE and PP, might exhibit a successful removal when applied in leachate treatment [83]. However, the complex composition of leachate might alter the anticipated outcome. The relationship between the fate, transport, and removal efficiency of MPs in the leachate treatment process regarding polymer composition is not well documented. Studies analyzing MPs' fate in the leachate treatment system are needed to confirm their correlation with polymer composition.

#### 4.3. Shape

The morphologies of MPs identified in leachate include lines, flakes, films, fragments, pellets, beads, foam fiber, and granules (Fig. 4a). Fiber and fragments are the most abundant shapes of MPs in leachate worldwide (Fig. 4b). Due to the form, fiber and fragments might be more favorable to infiltrate into the leachate from landfills with rainwater. On the other hand, the dominant existence of fibrous MPs in the leachate was primarily caused by the fact that fibers were easier to pass through the garbage and enter the leachate due to their small sizes [40].

The parent plastic products can be traced from the shape of MPs. For example, films are usually generated from plastic bags and packages. Plastic bags are thin and transparent, so they can easily get broken through the exposure to the sun. Granules and spheres are mostly from plastic containers, water bottles, microbeads, or food storage containers [43]. The shape can also indicate the source (primary/secondary) of plastics. For example, most of the MPs found in the leachate are in irregular shape and hockly in structure with rough edges [37,38], which indicates the production of

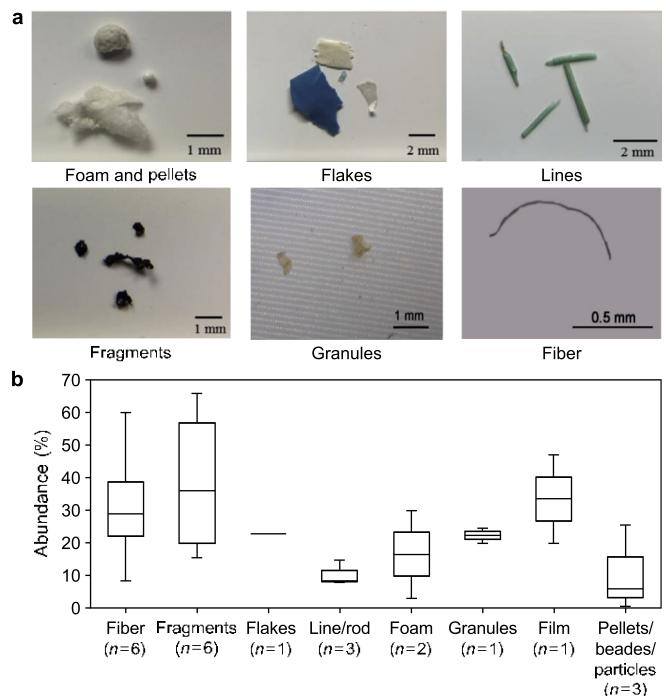


Fig. 4. a, Example of different shapes of microplastic detected in landfill leachate. b, Relative abundance of different shapes of microplastics in the landfill leachate. The median, 10th, 25th, 75th, and 90th percentiles were plotted as vertical boxes with error bars. [15,37e41,43].

secondary MPs from plastic debris by the fragmentation process. Moreover, shapes can also indicate the location from where the microplastic originated. For example, resin pellets might be the predominant shape of microplastic near industrial areas, while fragments and foam might be in high concentration near the fishing port [84].

Studies from almost all regions indicated that MPs found in landfill leachate had irregular shapes and rough surface texture caused by the fragmentation of plastic products in the landfill environment [39,45]. The surface texture of the MP surface is an important parameter to presume the possible threat to the environment. The husky surface might enhance contaminant adsorption, such as heavy metals and organic pollutants, enhancing the environmental risk of leachate disposal. Again, the surface roughness influences the removal rate through the different treatment processes. For instance, with smooth textures, fibers and pellets were comparatively less prone to being trapped by mechanical methods [85]. Angular and twisted morphologies with curved-surface textures make fragments and granules easily captured [86].

#### 4.4. Size

The size of microplastic refers to the largest length of plastic particles. Size is one of the most critical characteristics of microplastics, which determines its potential damage to humans and the environment. MPs in leachate displayed a wide size range from <20 to 5000 mm. The wide variation in size could be highly influenced by the detection method. For example, most tiny particles will get lost if a larger sieve is employed during sampling. To get a whole scenario about particle distribution, studies should consider extracting MPs for a more extensive size range (1e5000 mm). To properly compare results among numerous research, clear criteria for defining the size of MPs should be followed, and standardized sampling and extraction protocols should be established [87].

The number of microplastics in landfill leachate increases with the decrease in particle size. For example, He et al. [37] detected that 75% of microplastics in the sample were in between the size of 100e1000 mm and 20% of the count were in the range of 1000e5000 mm while only about 5% of particles were with the size of >5000 mm. A similar result was found by Ref. [42] while evaluating the microplastic abundance in groundwater near municipal solid waste dumpsites in South India. Microplastic produced by fragmentation during landfilling process causes travelers to leachate with rainwater. It could be inferred that smaller particles were more readily accumulated in the leachate, while larger MPs would retain more in the solid phase of landfills. Su et al. [38] confirmed this fact by comparing the MP occurrence in landfill refuse and leachate and identified that the size of microplastic in the leachate is much smaller (0.83 mm) than the refuse (4.97 mm).

Size is an influential factor that can affect the removal efficiency of MPs by different treatment units. Fragmentation during the treatment process generates multiple smaller MPs or NPs from one larger MP particle; therefore, a negative removal efficiency of that treatment steps could be reported. For example, Sun et al. [39] reported the concentration of microplastics in untreated leachate as  $235.4 \pm 17.1$  items L<sup>-1</sup>, which increased almost 150 times after going through the membrane bioreactor. Similar findings were achieved for WWTPs. The wastewater influent, MPs between 20 and 100 mm comprises around 45%, and after preliminary treatment, the concentration of MPs in that size range was observed to be 70%. Therefore, following the size distribution in each leachate treatment step is necessary to judge the success of a particular treatment procedure.

#### 4.5. Color

The colors of MPs depend on the colors of their parent plastic and life span. For example, transparent fibers might originate from the fragmentation of fishing lines or nets, while colored particles are more likely derived from the breakdown of commonly used plastic commodities, such as textile and packing products [88]. However, they can change by the weathering effect. Color is an overlooked property that has been well-defined in very few research. However, the color of the MPs can provide critical hints about the solid waste composition and the duration of the fragmentation process. For example, the dominant, white-colored plastics indirectly indicate the degradation process that takes place on-site for a long time, transforming other color contents into white [42]. The high abundance of transparent and yellowish color suggested that most particles were aged and presented in the landfill system for a long time [39]. The yellowish color also may indicate a higher quantity of organic material in the samples [8]. Sun et al. [39] also identified that over 90% of their detected MPs were transparent or yellowish, while some (<10%) were in other colors. Kilponen [8] also detected an abundance of transparent and yellowish color particles from the leachate sample of Finland. In contrast to landfill leachate, in flowing water, colored MPs (white, yellow, green, red, orange, blue, black, and grey) are the most dominant ones accounting for 50.4e86.9% of the total MPs [89]. This difference is possibly due to the difference in the retention time of plastic in landfill leachate and flowing water. As MPs stay and fragment in the landfill for a longer time, the original color of the polymer alters due to weathering effect. The level of threat to the biota by MPs is related to their color. For example, due to the likelihood of their food, white microplastics are likely to be ingested more by plankton, fish, and other species. In that way, microplastics might enter food webs and cause several physiological toxic effects with intake [90]. Hence, to realize the potential threat of MPs by landfill leachate, their color should be characterized in more analysis.

#### 5. Removal of MPs in the landfill leachate treatment facilities

If not properly managed, MPs from landfill leachate can pollute the nearby environment. For instance, Cordova and Riani [41] measured the MP concentration in the receiving river before and after the discharge of leachate effluent. They identified that the MP count increased around three times after the leachate discharge in the river. In another report, Silva et al. [91] estimated a yearly release of 0.03 billion or 291 items L<sup>-1</sup> of MPs via European landfills leachate. Therefore, careful MP removal management is necessary to mitigate MPs migration from landfill leachate into the environment. Currently, the leachate treatment facilities are not specially designed for addressing MPs contamination, though several studies indicated a high removal of MPs by traditional leachate treatment process [39,44].

Generally, leachate treatment is conducted by biological, physical, or chemical processes. Common treatment steps include soil bed filtration, aeration, sequencing batch reactors (SBR), membrane bioreactors (MBR), oxidation, coagulation/flocculation, activated carbon, stripping, evaporation, and reverse osmosis (RO) [39,44,92]. Leachate recirculation in landfills and leachate transfer to wastewater treatment plants is also applied [45]. Depending on the treatment technique, leachate treatment processes can decrease the concentration of microparticles from 3% to 100% (Table 2). Fig. 5 summarizes the MP removal efficiency and challenges due to the presence of MPs in different leachate treatment processes.

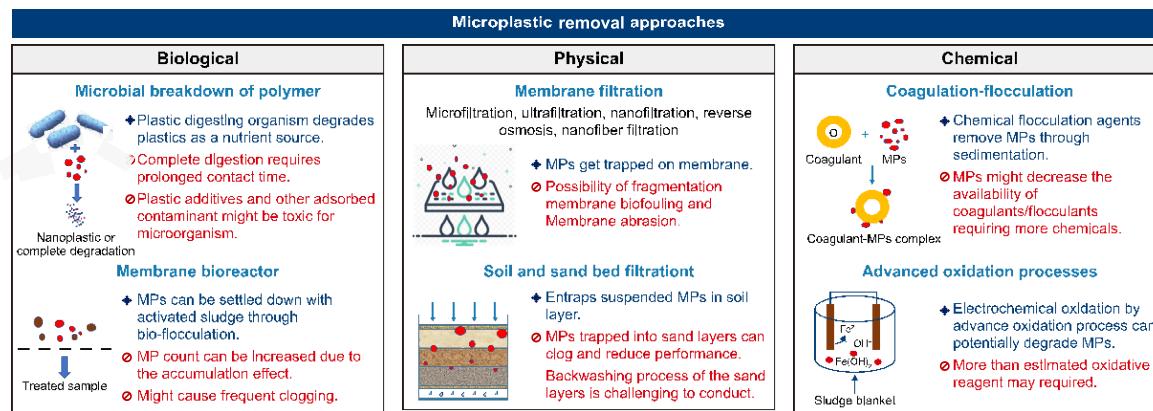


Fig. 5. Efficiency and challenges of microplastic removal by the leachate treatment process.

### 5.1. Biological treatment

Biological approaches are widely used for leachate treatment for their reliability, cost-effectiveness, and simplicity. Biological treatment methods, such as bio-flocculation, by activated sludge and degradation by plastic-ingesting organisms indicated their potential for microplastic reduction in leachate effluent [44]. analyzed the microplastic in raw leachate and leachate treated with SBR and documented a 100% removal efficiency. In SBR, high-density microplastics can settle down with biomass, reducing the leachate effluent's MP count. MBR is another widely used biological treatment for landfill leachate. Sun et al. [39] analyzed leachate from a leachate treatment unit with MBR. The study reported that membrane treatment effectively reduced microplastics loading to 0.14% for particles and 0.01% for mass concentration, but the average particle density increased. Zhang et al. [40] also examined the fate of MPs in a two-stage treatment with MBR and two-stage Anoxic/Oxic (AO). Zhang et al. [40] reported 50% and 20% removal efficiency after MBR and AO, respectively. In an MBR, the microplastic count can be increased due to the accumulation effect of microplastic in the treatment system. For example, Sun et al. [39] noticed an increased amount (150 times higher) of microplastic in an MBR effluent compared to the raw leachate sample. Consequently, as the MPs got captured by the membrane bioreactor, the microplastic in the sample of membrane tank effluent was significantly reduced, indicating a high removal rate of microplastic in the membrane bioreactor system. It is noteworthy that MPs present in raw leachate might induce frequent clogging in MBR, requiring recurrent backwash to clear the sludge cake layer. Frequent backwashing might accidentally release the MPs trapped in the membrane. Therefore, the performance of MP removal by MBR fluctuates depending on the membrane's pore size and the incidence of backwashing [11].

The microbial breakdown of polymer in the landfill leachate is another biological removal process for microplastic. For Example, Different bacteria like *Bacillus cereus*, *Bacillus gottheilii*, *Alcaligenes faecalis*, *Bacillus amyloliquefaciens*, *Bacillus brevis*, *Cyanobacterium*, *Anabaena spirooides*; Microalgae like *Scenedesmus dimorphus* (Green microalga), *Anabaena spirooides* (blue-green alga) and *Navicula pupula* (Diatom) and, other microorganisms like *Agios consortium*, *Souda consortium*, *Penicillium Roquefort*, etc. Can successfully degrade polyethylene, polystyrene, polyethylene terephthalate, and polypropylene polymers as their nutrient source [93e97]. Utilizing microbial breakdown for the degradation of MPs/ NPs in leachate is less expensive and safe for use to a large extent [93]. However, the efficiency of this method depends on the contact

time between the potential microbes and the targeted polymer [75].

### 5.2. Physical treatment

Different physical treatments, such as filtration and sedimentation. Can potentially remove MPs while employed in a leachate treatment system. Microfiltration (pore size  $10\text{e}0.1$  mm), ultrafiltration (pore size  $0.1\text{e}10$  nm), and nanofiltration (pore size  $10\text{e}1$  nm) are frequently used leachate treatment techniques based on physical separation. All these filtration systems can also separate MPs from the leachate according to their sizes. RO (pore size  $1\text{e}0.1$  nm) is another promising physical separation technique [98], and the competence of RO for removing MPs from landfill leachate has been mentioned in multiple studies [39,45]. Sun et al. [39] analyzed the leachate sample treated with nanofiltration and RO and recognized almost 99% removal of MPs. In contrast, Zhang et al. [40] reported a high efficiency of MP removal by the ultrafiltration technique. Still, they could not find any contribution of NF and RO on MP reduction in leachate effluent. The leachate went through a membrane bioreactor in both studies before advanced separation. However, fragmentation of MPs into nanoparticles can occur during membrane filtration resulting in membrane abrasion and fouling [99].

For leachate treatment, soil and sand bed filtration can successfully remove MPs from leachate. The effectiveness of this treatment is correlated to pore size. Rapid sand filtration can entrap suspended solids within three sand layers of anthracite, silica, and gravel [17]. van Praagh et al. [44] reported a 76% and 99% removal rate with soil and sand bed filtration, respectively. However, MPs trapped in sand layers can clog and reduce performance. Furthermore, the backwashing process of the sand layers is also challenging to conduct [17].

### 5.3. Chemical treatment

Coagulation-flocculation and chemical oxidation are potential chemical approaches to separate and remove suspended solids from water samples. Even though not targeted for MP separation, the coagulation-flocculation process can remove MPs from the leachate sample. Multiple reports have also stated significant MP removal from wastewater samples [100,101]. Coagulants like polyacrylamide (PAM), Fe and Al-based salts, and  $\text{FeCl}_3 \cdot 6\text{H}_2\text{O}$  generally remove MPs by forming larger clusters in which MPs get trapped [93]. However, the interaction of MP with the chemical flocculation agents may decrease the efficiency of the leachate

treatment system. Electro-coagulation is another process that can be efficiently removed MPs from influent. In electro-coagulation, metal ions ( $Fe^{2+}$  and  $Al^{3+}$ ) are released from electrodes that react with the hydroxide to form metal hydroxide coagulants and generate sludge blankets for adhering MPs [102]. In wastewater treatment plants, almost 90% of MPs was removed using this method [93]. van Praagh et al. [44] reported a 3% removal of MPs from landfill leachate by flocculation. However, details about the flocculation process were not mentioned in that study.

Besides coagulation-flocculation, several other chemical treatment approaches generally applied in landfill leachate treatment systems can potentially remove MPs from leachate effluent. For instance, electrochemical oxidation (OCl, O<sub>3</sub>, or H<sub>2</sub>O<sub>2</sub>) or advanced oxidation processes (combination of O<sub>3</sub>/H<sub>2</sub>O<sub>2</sub>, ultraviolet (UV)/ultrasound, O<sub>3</sub>/UV, H<sub>2</sub>O<sub>2</sub>/UV, H<sub>2</sub>O<sub>2</sub>/ultrasound, etc.) may degrade MPs breaking the chain of different polymer. Moreover, disinfection processes like chlorination, ozonation, and UV radiation can also break MPs into smaller sizes and even produce nanoplastics [46,100,103]. However, MPs in the leachate might reduce the efficiency of the disinfection processes by devouring disinfectants or protecting bacteria from the attack of disinfectants [17].

## 6. Perspectives on microplastic removal methods

With all kinds of treatments evaluated for MPs in landfill leachate, most MP removal is driven by separation-based treatment processes rather than degradation, such as bio-flocculation, sedimentation, air flotation, membrane separation, filtration, etc. All separation-based treatments produce MPs concentrated residuals in biosolids, chemical sludge, RO brine, froth in air flotation, etc. More investigation is needed for the final disposal of and/or resource recovery from these MPs-concentrated residuals.

Though multiple treatment technologies were evaluated for MP removal from landfill leachate in literature, in practice, it is unlikely to install new treatment processes only for MPs. It is more realistic to promote monitoring MPs in existing landfill leachate treatment facilities to better understand the fate and removal rate of MPs, based on which to develop improvement strategies for MP management, such as membrane modification and coagulant addition, etc. To facilitate universal MP monitoring in landfill leachate, standardized sampling, detection, and characterization methodologies are necessary but are not in place yet. It is mainly due to the intricacy and variation of landfill leachate matrices, especially high levels of organic matter, which can create significant background noises for the many spectroscopic detection means, such as stereomicroscope, SEM, FTIR, Raman spectroscopy, etc. The development of pertinent pretreatment methods is the key to MPs detection and characterization in landfill leachate matrices.

Discharging landfill leachate to WWTPs and disposing wastewater sludge in MSW landfills create a unique loop for recalcitrant contaminants in landfill leachate to transfer between landfills and WWTPs. Taking the US as an example, 54% of landfill leachate is discharged to WWTPs, while 22% of wastewater sludge is disposed of in MSW landfills. Even if not completely closed, this landfill-WWTP loop provides a niche with extended retention time for MPs and other recalcitrant contaminants. In addition, bioreactor landfills, which recirculate leachate by pumping collected leachate back to the top of waste cells, also provide a longer retention time for leachate. The prolonged retention time for landfill leachate by landfill-WWTP loop and bioreactor landfills can facilitate possible physical fragmentation and bacterial degradation and depolymerization of MPs, which can release plastic degradation by-products and plastic additives as secondary contaminants.

## 7. Conclusions

There are primary and secondary MPs in landfill leachate. Primary MPs are manufactured on a micro scale, while secondary MPs are generated by the degradation and/or fragmentation of regular plastic waste in landfills and contribute to the total MPs in landfill leachate. Wastewater treatment residuals are another source of MPs in landfill leachate.

Methods for sampling and detecting microplastics in landfill leachate vary considerably between studies. Container collection and pumping are the most common methods of sampling. Micro-FTIR or Raman techniques may be the most effective method for characterizing landfill leachate microplastics.

The high variance of MPs concentration in landfill leachate is reported due to: (i) inconsistent sampling and detection methods and (ii) highly variable solid waste composition. Literature reported less overall MP concentrations in landfill leachate than sewage, possibly because tinier MPs/NPs in landfill leachate are ignored in the number-based concentration reports. Also, fresh landfill leachate contained more MPs than mature landfill leachate due to increased plastic use and plastic waste production. The geographical comparison showed that MP concentration in landfill leachate is directly related to the local plastic waste production and waste management approaches.

PE, PP, and PS are the most abundant plastic polymers in landfill leachate. Polymer types also determine their physical properties, such as shape, density, etc., influencing their removal efficiencies in landfill leachate treatment processes.

Fiber and fragments are the most abundant shapes of MPs in landfill leachate as they are easier to pass through the waste layers. The shape can indicate the origin (plastic bags, plastic containers, etc.), source (primary or secondary), and location of the parent plastic waste. The shape of MPs can also change through treatment processes.

The color of MPs in landfill leachate is mainly determined by their parent plastic waste. The dominance of light-colored (transparent, white, or yellowish) MPs indirectly indicates long-term degradation due to the weathering effect.

Monitoring of MPs in landfill leachate treatment facilities is limited, and a wide range of removal efficiency was reported. MP removal in engineered biological treatment systems (such as SBR) is believed to be mainly driven by bio-flocculation. High removal efficiency is believed to be an overestimation due to the ignorance of smaller MPs in the detection methods. Microbial breakdown of MPs is reported to take place with extended contact time.

Membrane filtration processes (MF, NF, UF, RO, etc.) are reported to have high removal efficiency for MPs in landfill leachate with high cost. The fragmentation of MPs into NPs can cause membrane abrasion and fouling. Low-cost physical filtration, such as soil and rapid sand filtration, were reported with moderately high removal efficiencies. Sand layer clogging and backwashing are the main issues with rapid sand filtration.

Various oxidation and disinfection processes are reported effective in removing MPs/NPs in landfill leachate, while very limited information is available for coagulation-flocculation.

## CRediT authorship contribution statement

Mosarrat Samiha Kabir: Conceptualization, Investigation, Writing - Original Draft Preparation. Hong Wang: Conceptualization. Stephanie Luster-Teasley: Supervision. Lifeng Zhang: Supervision, Resources. Renzun Zhao: Funding Acquisition,

## Conceptualization, Project Administration, Writing, Review & Editing, Supervision.

### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

### Acknowledgements

This work is financially supported by a grant sponsored by the National Science Foundation, award number 2101053, and a grant sponsored by the North Carolina Attorney General Office's Environmental Enhancement Grant titled "Environmental Impacts of Landfill Induced Anthropogenic Dissolved Organic Nitrogen in Eastern North Carolina Estuaries".

### References

- [1] Z.-W. He, W.-J. Yang, Y.-X. Ren, H.-Y. Jin, C.-C. Tang, W.-Z. Liu, C.-X. Yang, A.-J. Zhou, A.-J. Wang, Occurrence, Effect, and Fate of Residual Microplastics in Anaerobic Digestion of Waste Activated Sludge: A State-Of-The-Art Review, *Bioresource Technology*, 2021, 125035.
- [2] F.P. de Albuquerque, M. Dhadwal, W. Dastyar, S.M.M. Azizi, I. Karidio, H. Zaman, B.R. Dhar, Fate of disposable face masks in high-solids anaerobic digestion: experimental observations and review of potential environmental implications, *Case Studies Chemical Environ. Eng.* 3 (2021), 100082.
- [3] B.N. Kulkarni, V. Anantharama, Repercussions of COVID-19 pandemic on municipal solid waste management: challenges and opportunities, *Sci. Total Environ.* 743 (2020), 140693.
- [4] E.G. Xu, Z.J. Ren, Preventing masks from becoming the next plastic problem, *Front. Environ. Sci. Eng.* 15 (6) (2021) 125.
- [5] T. Lomonaco, E. Manco, A. Corti, J. La Nasa, S. Ghimenti, D. Biagini, F. Di Francesco, F. Modugno, A. Ceccarini, R. Fuoco, Release of harmful volatile organic compounds (VOCs) from photo-degraded plastic debris: a neglected source of environmental pollution, *J. Hazard Mater.* 394 (2020), 122596.
- [6] S. Matthews, L. Mai, C.-B. Jeong, J.-S. Lee, E.Y. Zeng, E.G. Xu, Key mechanisms of micro-and nanoplastic (MNP) toxicity across taxonomic groups, *Comp. Biochem. Physiol. C Toxicol. Pharmacol.* (2021), 109056.
- [7] A.L. Andrade, *Plastics and Environmental Sustainability*, Wiley Online Library, 2015.
- [8] J. Kilponen, *Microplastics and Harmful Substances in Urban Runoffs and Landfill Leachates: Possible Emission Sources to Marine Environment*, 2016.
- [9] M. Eriksen, L.C. Lebreton, H.S. Carson, M. Thiel, C.J. Moore, J.C. Borerro, F. Galgani, P.G. Ryan, J. Reisser, Plastic pollution in the world's oceans: more than 5 trillion plastic pieces weighing over 250,000 tons afloat at sea, *PLoS One* 9 (12) (2014), e111913.
- [10] M. Piccardo, M. Renzi, A. Terlizzi, Nanoplastics in the oceans: theory, experimental evidence and real world, *Mar. Pollut. Bull.* 157 (2020), 111317.
- [11] Y.L. Cheng, J.-G. Kim, H.-B. Kim, J.H. Choi, Y.F. Tsang, K. Baek, Occurrence and removal of microplastics in wastewater treatment plants and drinking water purification facilities: a review, *Chem. Eng. J.* (2021), 128381.
- [12] L. Nizzetto, M. Futter, S. Langaas, Are Agricultural Soils Dumps for Microplastics of Urban Origin?, 2016.
- [13] M. Ateia, G. Ersan, M.G. Alalm, D.C. Boffito, T. Karanfil, Emerging Investigator Series: Microplastics Sources, Fate, Toxicity, Detection, and Interactions with Micropollutants in Aquatic Ecosystems: A Review of Reviews, *Environmental Science: Processes & Impacts*, 2022.
- [14] J. Du, S. Xu, Q. Zhou, H. Li, L. Fu, J. Tang, Y. Wang, X. Peng, Y. Xu, X. Du, A review of microplastics in the aquatic environment: distribution, transport, ecotoxicology, and toxicological mechanisms, *Environ. Sci. Pollut. Control Ser.* 27 (11) (2020) 11494e11505.
- [15] M. Kazour, S. Terki, K. Rabhi, S. Jemaa, G. Khalaf, R. Amara, Sources of microplastics pollution in the marine environment: importance of wastewater treatment plant and coastal landfill, *Mar. Pollut. Bull.* 146 (2019) 608e618.
- [16] R.W. Chia, J.-Y. Lee, H. Kim, J. Jang, Microplastic pollution in soil and groundwater: a review, *Environ. Chem. Lett.* 19 (6) (2021) 421e4224.
- [17] M. Enfrin, L.F. Dumee, J. Lee, Nano/microplastics in water and wastewater treatment processes: origin, impact and potential solutions, *Water Res.* 161 (2019) 621e638.
- [18] T. Mani, A. Hauk, U. Walter, P. Burkhardt-Holm, Microplastics profile along the rhine river, *Sci. Rep.* 5 (1) (2015) 1e7.
- [19] L.M.R. Mendoza, H. Karapanagioti, N.R. Alvarez, Micro (nanoplastics) in the marine environment: current knowledge and gaps, *Curr. Opin. Environ. Sci. Health* 1 (2018) 47e51.
- [20] J. Sun, X. Dai, Q. Wang, M.C. van Loosdrecht, B.-J. Ni, Microplastics in wastewater treatment plants: detection, occurrence and removal, *Water Res.* 152 (2019) 21e37.
- [21] C. Zarfl, D. Fleet, E. Fries, F. Galgani, G. Gerdts, G. Hanke, M. Matthies, Microplastics in oceans, *Mar. Pollut. Bull.* 62 (2011) 1589e1591.
- [22] H. Golwala, X. Zhang, S.M. Iskander, A.L. Smith, Solid waste: An overlooked source of microplastics to the environment, *Science of the Total Environment* 769 (2021) 144581.
- [23] P.U. Iyare, S.K. Ouki, T. Bond, Microplastics removal in wastewater treatment plants: a critical review, *Environ. Sci.: Water Res. Technol.* 6 (10) (2020) 2664e2675.
- [24] J. Burlakovs, M. Kriipsalu, D. Porshnov, Y. Jani, V. Ozols, K.-M. Pehme, V. Rudovica, I. Grinfeld, J. Pilecka, Z. Vincevica-Gaile, Gateway of landfilled plastic waste towards circular economy in Europe, *Separations* 6 (2) (2019) 25.
- [25] EPA, Epa, 2019. <https://www.epa.gov/facts-and-figures-about-materials-waste-and-recycling/plastics-material-specific-data#PlasticsTableandGraph>.
- [26] M. Brebu, Environmental degradation of plastic composites with natural fillers: a review, *Polymers* 12 (1) (2020) 166.
- [27] US EPA, *Landfill Bioreactor Performance: Second Interim Report-Outer Loop Recycling & Disposal Facility*, Louisville, Kentucky, 2006.
- [28] L. Hou, D. Kumar, C.G. Yoo, I. Gitsov, E.L.-W. Majumder, Conversion and removal strategies for microplastics in wastewater treatment plants and landfills, *Chem. Eng. J.* 406 (2021), 126715.
- [29] G. Gatidou, O.S. Arvaniti, A.S. Stasinakis, Review on the occurrence and fate of microplastics in sewage treatment plants, *J. Hazard Mater.* 367 (2019) 504e512.
- [30] S.A. Carr, J. Liu, A.G. Tesoro, Transport and fate of microplastic particles in wastewater treatment plants, *Water Res.* 91 (2016) 174e182.
- [31] E.A. Gies, J.L. LeNoble, M. Noël, A. Etemadifar, F. Bishay, E.R. Hall, P.S. Ross, Retention of microplastics in a major secondary wastewater treatment plant in Vancouver, Canada, *Mar. Pollut. Bull.* 133 (2018) 553e561.
- [32] Q.-L. Jia, H. Chen, X. Zhao, L. Li, Y.-H. Nie, J.-F. Ye, Removal of microplastics by different treatment processes in Shanghai large municipal wastewater treatment plants, *Huan Jing Ke Xue& Huanjing Kexue* 40 (9) (2019) 4105e4112.
- [33] J. Talvitie, A. Mikola, O. Setälä, M. Heinonen, A. Koistinen, How well is microlitter purified from wastewater? A detailed study on the stepwise removal of microlitter in a tertiary level wastewater treatment plant, *Water Res.* 109 (2017) 164e172.
- [34] R. Stehouwer, What is sewage sludge and what can be done with it, *Penn State Extension* 15 (2010).
- [35] US EPA, U. E. Us EPA, 2019. <https://www.epa.gov/biosolids/basic-information-about-biosolids>.
- [36] C. Rolsky, V. Kelkar, E. Driver, R.U. Halden, Municipal sewage sludge as a source of microplastics in the environment, *Curr. Opin. Environ. Sci. Health* 14 (2020) 16e22.
- [37] P. He, L. Chen, L. Shao, H. Zhang, F. Lü, Municipal solid waste (MSW) landfill: a source of microplastics? Evidence of microplastics in landfill leachate, *Water Res.* 159 (2019) 38e45.
- [38] Y. Su, Z. Zhang, D. Wu, L. Zhan, H. Shi, B. Xie, Occurrence of microplastics in landfill systems and their fate with landfill age, *Water Res.* 164 (2019), 114968.
- [39] J. Sun, Z.-R. Zhu, W.-H. Li, X. Yan, L.-K. Wang, L. Zhang, J. Jin, X. Dai, B.-J. Ni, Revisiting microplastics in landfill leachate: unnoticed tiny microplastics and their fate in treatment works, *Water Res.* 190 (2021), 116784.
- [40] Z. Zhang, Y. Su, J. Zhu, J. Shi, H. Huang, B. Xie, Distribution and removal characteristics of microplastics in different processes of the leachate treatment system, *Waste Manag.* 120 (2021) 240e247.
- [41] M.R. Cordova, E. Riani, Micro-and mesoplastics release from the Indonesian municipal solid waste landfill leachate to the aquatic environment: case study in Galuga Landfill Area, Indonesia, *Mar. Pollut. Bull.* 163 (2021), 111986.
- [42] U. Natesan, R. Vaikunth, P. Kumar, R. Ruthra, S. Srinivasulu, Spatial distribution of microplastic concentration around landfill sites and its potential risk on groundwater, *Chemosphere* 277 (2021), 130263.
- [43] A. Puthcharoen, S. Leungprasert, Determination of microplastics in soil and leachate from the Landfills, *Thai Environ. Eng. J.* 33 (3) (2019) 39e46.
- [44] M. van Praagh, C. Hartman, E. Brandmyr, Microplastics in Landfill Leachates in the Nordic Countries, *TemaNord*, ISSN, 2018, 0908e6692.
- [45] A.C. Narevski, M.I. Novakovic, M.Z. Petrovic, I.J. Mihajlovic, N.B. Maodus, G.V. Vujic, Occurrence of bisphenol A and microplastics in landfill leachate: lessons from South east Europe, *Environ. Sci. Pollut. Control Ser.* (2021) 1e8.
- [46] M.R. Michielssen, E.R. Michielssen, J. Ni, M.B. Duhaime, Fate of microplastics and other small anthropogenic litter (SAL) in wastewater treatment plants depends on unit processes employed, *Environ. Sci. Water Res. Technol.* 2 (6) (2016) 1064e1073.
- [47] K. Magnusson, F. Noren, Screening of Microplastic Particles in and Down-Stream a Wastewater Treatment Plant, 2014.
- [48] S. Mintenig, I. Int-Veen, M.G. Leder, S. Primpke, G. Gerdts, Identification of microplastic in effluents of waste water treatment plants using focal plane array-based micro-Fourier-transform infrared imaging, *Water Res.* 108 (2017) 3656e372.
- [49] M. Simon, N. van Alst, J. Vollertsen, Quantification of microplastic mass and removal rates at wastewater treatment plants applying Focal Plane Array (FPA)-based Fourier Transform Infrared (FT-IR) imaging, *Water Res.* 142 (2018) 1e9.

[50] C. Ort, M.G. Lawrence, J. Rieckermann, A. Joss, Sampling for pharmaceuticals and personal care products (PPCPs) and illicit drugs in wastewater systems: are your conclusions valid? A critical review, *Environ. Sci. Technol.* 44 (16) (2010) 6024e6035.

[51] M. Cole, H. Webb, P.K. Lindeque, E.S. Fileman, C. Halsband, T.S. Galloway, Isolation of microplastics in biota-rich seawater samples and marine organisms, *Sci. Rep.* 4 (1) (2014) 1e8.

[52] J.L. Hanson, N. Yesiller, N.K. Oettle, Spatial and temporal temperature distributions in municipal solid waste landfills, *J. Environ. Eng.* 136 (8) (2010) 804e814.

[53] R.R. Hurley, A.L. Lusher, M. Olsen, L. Nizzetto, Validation of a method for extracting microplastics from complex, organic-rich, environmental matrices, *Environ. Sci. Technol.* 52 (13) (2018) 7409e7417.

[54] S. Kühn, B. Van Werven, A. Van Oyen, A. Meijboom, E.L.B. Rebollo, J.A. Van Franeker, The use of potassium hydroxide (KOH) solution as a suitable approach to isolate plastics ingested by marine organisms, *Mar. Pollut. Bull.* 115 (1e2) (2017) 86e90.

[55] S.A. Mason, D. Garneau, R. Sutton, Y. Chu, K. Ehmann, J. Barnes, P. Fink, D. Papazissimos, D.L. Rogers, Microplastic pollution is widely detected in US municipal wastewater treatment plant effluent, *Environ. Pollut.* 218 (2016) 1045e1054.

[56] S. Ziajahromi, P.A. Neale, L. Rintoul, F.D. Leusch, Wastewater treatment plants as a pathway for microplastics: development of a new approach to sample wastewater-based microplastics, *Water Res.* 112 (2017) 93e99.

[57] A.S. Tagg, M. Sapp, J.P. Harrison, J.J. Ojeda, Identification and quantification of microplastics in wastewater using focal plane array-based reflectance micro-FT-IR imaging, *Anal. Chem.* 87 (12) (2015) 6032e6040.

[58] K. Munno, P.A. Helm, D.A. Jackson, C. Rochman, A. Sims, Impacts of temperature and selected chemical digestion methods on microplastic particles, *Environ. Toxicol. Chem.* 37 (1) (2018) 91e98.

[59] G. Erni-Cassola, M.I. Gibson, R.C. Thompson, J.A. Christie-Oleza, Lost, but found with Nile Red: a novel method for detecting and quantifying small microplastics (1 mm to 20 nm) in environmental samples, *Environ. Sci. Technol.* 51 (23) (2017) 13641e13648.

[60] A. Karami, A. Golieskardi, C.K. Choo, N. Romano, Y.B. Ho, B. Salamatinia, A high-performance protocol for extraction of microplastics in fish, *Sci. Total Environ.* 578 (2017) 485e494.

[61] J. Masura, J. Baker, G. Foster, C. Arthur, Laboratory Methods for the Analysis of Microplastics in the Marine Environment: Recommendations for Quantifying Synthetic Particles in Waters and Sediments, 2015.

[62] M.G. Lüder, H.K. Imhof, M. Ladehoff, L.A. Lüschel, C. Lorenz, S. Mintenig, S. Piehl, S. Primpke, I. Schrank, C. Laforsch, Enzymatic purification of microplastics in environmental samples, *Environ. Sci. Technol.* 51 (24) (2017) 14283e14292.

[63] C.B. Alvim, J.A. Mendoza-Roca, A. Bes-Pia, Wastewater treatment plant as microplastics release sourceQuantification and identification techniques, *J. Environ. Manag.* 255 (2020), 109739.

[64] N.W. Heo, S.H. Hong, G.M. Han, S. Hong, J. Lee, Y.K. Song, M. Jang, W.J. Shim, Distribution of small plastic debris in cross-section and high strandline on Heungnam beach, South Korea, *Ocean Sci. J.* 48 (2) (2013) 225e233.

[65] V. Hidalgo-Ruz, L. Gutow, R.C. Thompson, M. Thiel, Microplastics in the marine environment: a review of the methods used for identification and quantification, *Environ. Sci. Technol.* 46 (6) (2012) 3060e3075.

[66] Y.K. Song, S.H. Hong, M. Jang, G.M. Han, M. Rani, J. Lee, W.J. Shim, A comparison of microscopic and spectroscopic identification methods for analysis of microplastics in environmental samples, *Mar. Pollut. Bull.* 93 (1e2) (2015) 202e209.

[67] D.A. Cooper, P.L. Corcoran, Effects of mechanical and chemical processes on the degradation of plastic beach debris on the island of Kauai, Hawaii, *Mar. Pollut. Bull.* 60 (5) (2010) 650e654.

[68] S. Dehghani, F. Moore, R. Akhbarizadeh, Microplastic pollution in deposited urban dust, Tehran metropolis, Iran, *Environ. Sci. Pollut. Control Ser.* 24 (25) (2017) 20360e20371.

[69] W.J. Shim, S.H. Hong, S.E. Eo, Identification methods in microplastic analysis: a review, *Anal. Methods* 9 (9) (2017) 1384e1391.

[70] A. Käppler, D. Fischer, S. Oberbeckmann, G. Schernewski, M. Labrenz, K.-J. Eichhorn, B. Voit, Analysis of environmental microplastics by vibrational microscopy: FTIR, Raman or both? *Anal. Bioanal. Chem.* 408 (29) (2016) 8377e8391.

[71] M.G. Lüder, G. Gerdtz, Methodology used for the detection and identification of microplastics a critical appraisal, *Marine Anthropogenic Litter* (2015) 201e227.

[72] D. Schymanski, C. Goldbeck, H.-U. Humpf, P. Fürst, Analysis of microplastics in water by micro-Raman spectroscopy: release of plastic particles from different packaging into mineral water, *Water Res.* 129 (2018) 154e162.

[73] R. Lenz, K. Enders, C.A. Stedmon, D.M. Mackenzie, T.G. Nielsen, A critical assessment of visual identification of marine microplastic using Raman spectroscopy for analysis improvement, *Mar. Pollut. Bull.* 100 (1) (2015) 82e91.

[74] Swedish Waste Association, Microplastics in Treated Leachate e a Case Study of Eight Waste Treatment Facilities, 2018.

[75] K.L. Law, N. Starr, T.R. Siegler, J.R. Jambeck, N.J. Mallos, G.H. Leonard, The United States' contribution of plastic waste to land and ocean, *Sci. Adv.* 6 (44) (2020), eabd0288.

[76] C. Zhou, W. Fang, W. Xu, A. Cao, R. Wang, Characteristics and the recovery potential of plastic wastes obtained from landfill mining, *J. Clean. Prod.* 80 (2014) 80e86.

[77] S.Y. Park, C.G. Kim, Biodegradation of micro-polyethylene particles by bacterial colonization of a mixed microbial consortium isolated from a landfill site, *Chemosphere* 222 (2019) 527e533.

[78] H. Ritchie, M. Roser, *Plastic Pollution, Our World In Data*, 2018.

[79] Cenk, L., & Fikret, E. (n.d.). A statistical analysis of municipal waste treatment types in European countries. *Environ. Res. Technol.*, 3(3), 113e118.

[80] Allsopp, M. W., and G. Vianello. "Poly (Vinyl Chloride). Ullmann's encyclopedia of industrial chemistry." Weinheim, Germany: Wiley Online Library. doi 10, no. 14356007 (2000): a21\_717.

[81] J. Thornton, *Environmental Impacts of Polyvinyl Chloride (PVC) Building Materials*, Healthy Building Network, Washington, DC, 2002.

[82] R. Geyer, J.R. Jambeck, K.L. Law, Production, use, and fate of all plastics ever made, *Sci. Adv.* 3 (7) (2017), e1700782.

[83] W. Wang, J. Ge, X. Yu, Bioavailability and toxicity of microplastics to fish species: a review, *Ecotoxicol. Environ. Saf.* 189 (2020), 109913.

[84] J. Antunes, J. Frias, P. Sobral, Microplastics on the Portuguese coast, *Mar. Pollut. Bull.* 131 (2018) 294e302.

[85] Z. Long, Z. Pan, W. Wang, J. Ren, X. Yu, L. Lin, H. Lin, H. Chen, X. Jin, Microplastic abundance, characteristics, and removal in wastewater treatment plants in a coastal city of China, *Water Res.* 155 (2019) 255e265.

[86] P.A. Helm, Improving microplastics source apportionment: a role for microplastic morphology and taxonomy? *Anal. Methods* 9 (9) (2017) 1328e1331.

[87] M. Filella, Questions of size and numbers in environmental research on microplastics: methodological and conceptual aspects, *Environ. Chem.* 12 (5) (2015) 527e538.

[88] Z. Wang, T. Lin, W. Chen, Occurrence and removal of microplastics in an advanced drinking water treatment plant (ADWTP), *Sci. Total Environ.* 700 (2020), 134520.

[89] Q. Chen, Y. Li, B. Li, Is color a matter of concern during microplastic exposure to *Scenedesmus obliquus* and *Daphnia magna*? *J. Hazard Mater.* 383 (2020), 121224.

[90] R. Qiu, Y. Song, X. Zhang, B. Xie, D. He, Microplastics in urban environments: sources, pathways, and distribution, In *Microplastics terr. environ: Emerging contaminants major challenges* (2020) 41e61 (Springer).

[91] A.L. Silva, J.C. Prata, A.C. Duarte, A.M. Soares, D. Barcelo, T. Rocha-Santos, Microplastics in landfill leachates: the need for reconnaissance studies and remediation technologies, *Case Studies Chem. Environ.* 3 (2021), 100072.

[92] E. Kattel, A. Kivi, K. Klein, T. Tenno, N. Dulova, M. Trapido, Hazardous waste landfill leachate treatment by combined chemical and biological techniques, *Desalination Water Treat.* 57 (28) (2016) 13236e13245.

[93] A.H. Anik, S. Hossain, M. Alam, M.B. Sultan, M.T. Hasnine, M.M. Rahman, Microplastics Pollution: A Comprehensive Review on the Sources, Fates, Effects, and Potential Remediation, *Environmental Nanotechnology, Monitoring & Management*, 2021, 100530.

[94] A. Arguelles-Arias, M. Ongena, B. Halimi, Y. Lara, A. Brans, B. Joris, P. Fickers, *Bacillus amyloliquefaciens* GAI as a source of potent antibiotics and other secondary metabolites for biocontrol of plant pathogens, *Microb. Cell Factories* 8 (1) (2009) 1e12.

[95] S. Bahl, J. Dolma, J.J. Singh, S. Sehgal, Biodegradation of plastics: a state of the art review, *Mater. Today Proc.* 39 (2021) 31e34.

[96] W.Y. Chia, D.Y.Y. Tang, K.S. Khoo, A.N.K. Lup, K.W. Chew, Nature's fight against plastic pollution: algae for plastic biodegradation and bioplastics production, *Environ. Sci. Ecotechnol.* 4 (2020), 100065.

[97] R.V. Kumar, G. Kanna, S. Elumalai, Biodegradation of polyethylene by green photosynthetic microalgae, *J. Biorem. Biodegrad.* 8 (381) (2017) 2.

[98] S. Renou, J. Givaudan, S. Poulaïn, F. Dirassouyan, P. Moulin, Landfill leachate treatment: review and opportunity, *J. Hazard Mater.* 150 (3) (2008) 468e493.

[99] B. Ma, W. Xue, C. Hu, H. Liu, J. Qu, L. Li, Characteristics of microplastic removal via coagulation and ultrafiltration during drinking water treatment, *Chem. Eng. J.* 359 (2019) 159e167.

[100] H. Hidayaturrahman, T.-G. Lee, A study on characteristics of microplastic in wastewater of South Korea: identification, quantification, and fate of microplastics during treatment process, *Mar. Pollut. Bull.* 146 (2019) 696e702.

[101] J. Lawrence, H. Tosine, H. Zimmermann, T. Pang, Removal of asbestos fibres from potable water by coagulation and filtration, *Water Res.* 9 (4) (1975) 397e400.

[102] M. Shen, Y. Zhang, E. Almatrafi, T. Hu, C. Zhou, B. Song, Z. Zeng, G. Zeng, Efficient removal of microplastics from wastewater by an electrocoagulation process, *Chem. Eng. J.* 428 (2022), 131161.

[103] X. Lv, Q. Dong, Z. Zuo, Y. Liu, X. Huang, W.-M. Wu, Microplastics in a municipal wastewater treatment plant: fate, dynamic distribution, removal efficiencies, and control strategies, *J. Clean. Prod.* 225 (2019) 579e586.