

Entanglement-Enhanced Interferometry in Optical Fiber

Gregory R. Krueper¹, Robert Mellors^{2,3}, Charles Yu², Stephen B. Libby², Michael Messerly², and Juliet T. Gopinath^{1,4}

¹Department of Physics, University of Colorado Boulder, Boulder, CO 80309, USA

²Lawrence Livermore National Labs, Livermore, CA 94550, USA

³University of California, San Diego, San Diego, CA 92093

⁴Department of Electrical Engineering, University of Colorado Boulder, Boulder, CO 80309, USA

gregory.krueper@colorado.edu

Abstract: Fiber-based interferometry with entangled photons can provide sub-shot-noise resolution, which is ideal for photon-starved applications. Simulations demonstrate that measurements with realistic losses and other imperfections show quantum-enhanced phase resolution for practical applications. © 2021 The Author(s)

Quantum states of light are able to exceed the shot noise limit. This was famously demonstrated with squeezed light in the detection of gravitational waves [1]. For applications that require a low photon flux, like biochemical sensing, quantum computing and quantum communication, entangled photons could be the optimal probe [2]. Additionally, the flexibility and low optical attenuation of optical fiber may provide a more robust platform to bring these techniques into a wider application space.

A maximally entangled N00N state may exceed the shot noise limit for measurements by a factor of \sqrt{N} , where N is the number of photons in the state [3]. The related Holland-Burnett states are both more easily generated and robust against loss [4]. While previous models have shown how the measurement capability of these states are affected by loss, noise, and other imperfections separately [3–6], we present the first, to our knowledge, scalable model combining all imperfections at once. We use this model to analyze the feasibility of fiber-based, entanglement-enhanced interferometry. Under realistic experimental conditions (10% internal loss, 90% detector efficiency, 2 mrad of phase noise, and 5% photon distinguishability), the model shows a quantum advantage between 14% and 28% beyond the shot noise limit, depending on the number of photons in the entangled state. Additionally a two-mode squeezed-vacuum state can yield resolution 14% beyond the shot noise limit, while also having up to 30 times the photon flux compared to single photon pair sources for faster measurements.

A model entanglement-enhanced Mach-Zehnder interferometer in polarization-maintaining fiber is shown in Figure 1(a). A phase change can be induced by thermal expansion or strain in the fiber, or if using a photonic crystal fiber, a change in concentration of a diffuse gas in the fiber holes. Polarization-maintaining fiber is needed to minimize polarization mode dispersion, which could eliminate quantum interference. Because the phase resolution is a function of the phase, a portion of the top fiber can vary in strain to add a feedback element θ_{feedback} to keep the interferometer near its most sensitive operating point.

Mathematically, the model is represented by transformations of photon creation operators \hat{a}^\dagger and \hat{b}^\dagger [7]. To represent losses and detector inefficiencies, the model adds beamsplitters in both paths of the interferometer and

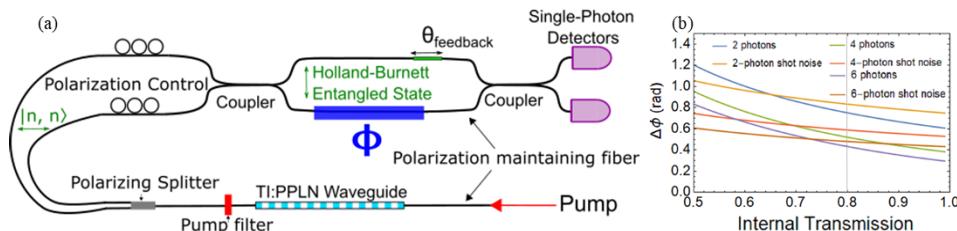


Fig. 1. Conceptual design for a fiber-based Mach-Zehnder interferometer with entangled photons. (a) The TI:PPLN waveguide acts as a degenerate photon pair source using type-II spontaneous parametric downconversion, while the polarizing splitter and 50:50 directional fiber coupler act to create a Holland-Burnett path-entangled state. The state interferes with itself at another 50:50 directional coupler, and the photon counting statistics are recorded with number-resolving photon detectors. (b) Plot of the phase resolution for 2, 4, and 6-photon entangled states, compared with the equivalent shot noise, as a function of internal transmission in the interferometer.

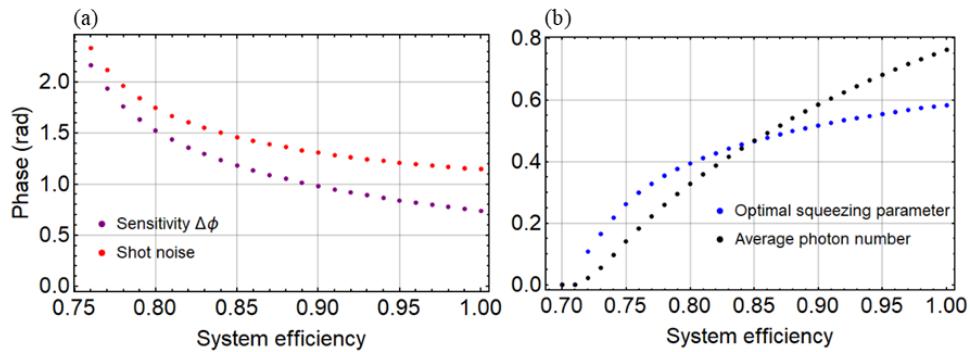


Fig. 2. Results from inputting a two-mode squeezed vacuum state, optimized for sensitivity as a function of system efficiency. (a) Phase resolution for the state compared to shot noise, and (b) the optimal squeezing parameter and corresponding average photon number of the input state, as a function of system efficiency.

in front of the detectors, respectively, that output into unmeasured ‘vacuum’ modes [4]. Additionally, a finite degree of entanglement is considered by having photons act independently, not interfering with each other, with a probability $1 - V$, where V is the Hong-Ou-Mandel visibility of the input photon state. This non-entangled case reproduces the results of classical interferometry. Other sources of phase noise are also modeled in a similar fashion to ref. [5]. Once probabilities of each detection event are calculated, the quantum Fisher information and quantum Cramér-Rao bound give a lower bound on the phase sensitivity of the setup. Our analysis focuses on analyzing 2, 4, and 6-photon Holland-Burnett states in varying lossy conditions, given finite noise and visibility.

Figure 1(b) shows the phase resolution of the 2, 4, and 6-photon Holland-Burnett states as a function of internal loss in both arms, in comparison to the state’s shot noise. This plot uses a Hong-Ou-Mandel visibility of 0.95, detector efficiency of 0.9, and 2 mrad of phase noise, which we believe are realistic experimental parameters in optical fiber. What is most notable here is that, despite increased sensitivity to loss, the 4 and 6-photon states still maintain a quantum advantage in sensitivity for transmissions above around 0.7. Additionally, the minimum sensitivities still follow the scaling $\Delta\phi \propto N^{-1}$, so they still have Heisenberg scaling.

We also consider the two-mode squeezed-vacuum state as an input, which after entanglement is taken as a superposition of HB(N) states with a thermal distribution in N [7]. Photon number resolution for detection is limited, and so only 2, 4, and 6-photon states are considered for measurements, while any higher states are lost. Using this input state, we calculate the optimal squeezing parameter to maximize the phase information per photon and the corresponding phase resolution. Figure 2 shows the optimal squeezing parameter and the resulting net phase resolution for the state as a function of system efficiency. A quantum advantage of 14% beyond shot noise is still experimentally achievable, with the additional benefit of increased photon flux. Compared to producing a single photon pair with a 1% chance of a second pair, the optimal squeezed state here can have up to 30 times the photon flux. We expect that this method will scale very well with advances in number resolution and flux rating for single-photon detectors, since higher-number states have higher sensitivity.

We have presented a model for entanglement-enhanced interferometry that includes, to our knowledge, all of the most relevant imperfections. The model shows that with realistic parameters, a practical measurement with a quantum advantage is possible, and that more photon flux is possible with a two-mode squeezed vacuum state.

References

1. The LIGO Scientific Collaboration, *Nat. Phys.* **7**, 962–965 (2011).
2. F. Wolfgramm, C. Vitelli, F. A. Beduini, N. Godbout, and M. W. Mitchell, *Nat. Photonics* **7**, 28–32 (2013).
3. J. P. Dowling, *Contemp. Phys.* **49**, 125–143 (2008).
4. A. Datta, L. Zhang, N. Thomas-Peter, U. Dorner, B. J. Smith, and I. A. Walmsley, *Phys. Rev. A - At. Mol. Opt. Phys.* **83**, 1–6 (2011).
5. B. R. Bhaskar, K. Jiang, and J. P. Dowling, *Phys. Rev. A* **88**, 023857 (2013).
6. M. Kacprzak, R. Demkowicz-Dobrzański, W. Wasilewski, K. Banaszek, and I. A. Walmsley, *Nat. Photonics* **4**, 357–360 (2010).
7. C. Gerry and P. Knight, *Introductory Quantum Optics* (Cambridge University Press, 2004).