

Federico Ardila, Graham Denham & June Huh Lagrangian combinatorics of matroids

Volume 6, issue 2 (2023), p. 387-411.

https://doi.org/10.5802/alco.263

© The author(s), 2023.

This article is licensed under the

CREATIVE COMMONS ATTRIBUTION 4.0 INTERNATIONAL LICENSE. http://creativecommons.org/licenses/by/4.0/







Lagrangian combinatorics of matroids

Federico Ardila, Graham Denham & June Huh

ABSTRACT The Lagrangian geometry of matroids was introduced in [2] through the construction of the conormal fan of a matroid M. We used the conormal fan to give a Lagrangian-geometric interpretation of the h-vector of the broken circuit complex of M: its entries are the degrees of the mixed intersections of certain convex piecewise linear functions γ and δ on the conormal fan of M. By showing that the conormal fan satisfies the Hodge-Riemann relations, we proved Brylawski's conjecture that this h-vector is a log-concave sequence.

This sequel explores the Lagrangian combinatorics of matroids, further developing the combinatorics of biflats and biflags of a matroid, and relating them to the theory of basis activities developed by Tutte, Crapo, and Las Vergnas. Our main result is a combinatorial realization of the intersection-theoretic computation above: we write the k-th mixed intersection of γ and δ explicitly as a sum of biflags corresponding to the nbc bases of internal activity k+1.

1. Introduction.

Let M be a matroid of rank r+1 on n+1 elements with no loops and no coloops. The Lagrangian geometry of matroids was introduced in [2] through the construction of the conormal fan of M. The conormal fan of M is a Lagrangian analogue of the Bergman fan of M, which in turn is a tropical geometric model of M. We used the conormal fan to give a tropical geometric interpretation of the h-vector of the broken circuit complex BC(M). Explicitly, we identified convex piecewise linear functions γ and δ whose mixed intersections satisfy

(1)
$$\gamma^k \delta^{n-k-1} \cap 1_{\mathcal{M},\mathcal{M}^{\perp}} = h_{r-k}(\mathcal{BC}(\mathcal{M})) \text{ for all } k,$$

ISSN: 2589-5486

where $1_{\mathrm{M,M^{\perp}}}$ is the top-dimensional constant Minkowski weight 1 on the conormal fan of M [2, Theorem 1.2]. We also showed that the conormal fan is Lefschetz, and in particular, satisfies the $Hodge-Riemann\ relations$ [2, Theorem 5.27]. Combining these results, we proved Brylawski's conjecture from [8] that the h-vector of the broken circuit complex forms a log-concave sequence, that is,

$$h_i(BC(M))^2 \geqslant h_{i-1}(BC(M))h_{i+1}(BC(M))$$
 for all i.

In this followup paper, we explore the *Lagrangian combinatorics of matroids* through an investigation of the combinatorial structure of the conormal fan. We further develop the study of biflats and biflags of matroids, initiated in [2], unveiling

Manuscript received 12th December 2021, revised 31st January 2022, accepted 10th August 2022. Keywords. basis activity, conormal fan, h-vector, matroid.

ACKNOWLEDGEMENTS. FA was partially supported by NSF grants DMS-1855610 and DMS-2154279. GD was supported by NSERC of Canada. JH was partially supported by NSF Grant DMS-2053308 and the Simons Investigator Grant.

a strong connection to the theory of basis activities developed by Tutte [22], Crapo [9], Las Vergnas [17], and others.

Our starting point is the combinatorial Definition 1.7 of the conormal Chow ring of M as a quotient of the polynomial ring in the variables $x_{F|G}$ corresponding to the biflats F|G of M. The quotient is graded and has degree n-1. By Poincaré duality, its top degree component is one-dimensional. Each of γ and δ can be expressed, in many equivalent ways, as a linear function in the $x_{F|G}$ s. Our goal is to compute $\gamma^k \delta^{n-k-1}$ in this ring. We develop a canonical expansion of this expression in terms of the reduced broken circuit complex of M, obtaining the following bijective manifestation of [2, Theorem 1.2].

THEOREM 1.1. For $0 \le k \le r$, in the conormal Chow ring of M, we have

$$\gamma^k \delta^{n-k-1} = \sum_B x_{\mathcal{F}^+(B)|\mathcal{G}^+(B)},$$

where the sum is over the nbc bases of M of internal activity k + 1.

The symbol $\mathcal{F}^+(B)|\mathcal{G}^+(B)$ stands for the *extended* nbc *biflag* associated to an *nbc* basis B in Section 2.2. By construction, for every such B,

$$x_{\mathcal{F}^+(B)|\mathcal{G}^+(B)} \cap 1_{\mathcal{M},\mathcal{M}^\perp} = 1.$$

Since M has exactly $h_{r-k}(BC(M))$ nbc bases with internal activity k+1, Theorem 1.1 is equivalent to (1) and [2, Theorem 1.2].

The proof of Theorem 1.1 that we give here is logically independent from the one in our earlier paper: the argument there proceeded by establishing the special case k=0 first ([2, Proposition 4.9]) and then using the theory of Chern–Schartz–MacPherson cycles of matroids introduced by López de Medrano, Rincón, and Shaw [18] to prove the general case. Our main goal here is to give an alternative, entirely combinatorial proof of this result. Our proof sheds light on the matroidal structure of the conormal Chow ring, and its connections with the theory of basis activities.

- 1.1. Enumerative combinatorics of matroids. For the remainder of this paper, we fix a total ordering on the ground set E of M and identify E with the set $\{0,1,\ldots,n\}$. We refer to [21, 24] for any undefined matroid terminology. We are interested in the following r-dimensional simplicial complexes associated to M:
 - (i) The independence complex IN(M), the collection of subsets of E which do not contain any circuit of M.
 - (ii) The broken circuit complex BC(M), the collection of subsets of E which do not contain any broken circuit of M.

A broken circuit is a subset obtained from a circuit of M by deleting the least element in the fixed ordering on E. The broken circuit complex BC(M) is the cone over the reduced broken circuit complex $\overline{BC}(M)$ with apex 0.

For a simplicial complex Δ of dimension r, its f-vector $f(\Delta) = (f_0, f_1, \dots, f_{r+1})$ is defined by

 $f_i(\Delta)$ = the number of faces in Δ with i vertices.

The f-vector is often stored more compactly in the h-vector $h(\Delta) = (h_0, h_1, \dots, h_{r+1})$, given by

$$\sum_{i=0}^{r+1} f_i(\Delta) q^{r-i+1} = \sum_{i=0}^{r+1} h_i(\Delta) (q+1)^{r-i+1}.$$

The h-vector of the broken circuit complex is given by

$$h_{r-k}(BC(M)) = h_{r-k}(\overline{BC}(M)) = t_{k+1,0}(M)$$
 for all k ,

where $t_{i,j}(M)$ is the coefficient of $x^i y^j$ in the Tutte polynomial $T_M(x,y)$ [5]. In particular, $h_{r+1}(BC(M))$ is zero, and $h_r(BC(M))$ is Crapo's beta invariant

$$\beta_{\rm M} = t_{1.0}({\rm M}).$$

The authors of [1] and [2] proved the following results, conjectured by Mason and Hoggar [14, 19] and by Brylawski and Dawson [8, 10], respectively.

Theorem 1.2. The following hold for any matroid M.

- (1) The f-vectors of IN(M) and BC(M) are log-concave [1].
- (2) The h-vectors of IN(M) and BC(M) are log-concave [2].

We note that the independence complex of any matroid is the reduced broken circuit complex of another matroid [7, Theorem 4.2], and, for any simplicial complex, the log-concavity of its h-vector implies the log-concavity of its f-vector [6, Corollary 8.4]. Also, for Theorem 1.2, we may suppose that M has no loops and no coloops. We thus focus on the h-vector of the broken circuit complex of a matroid with no loops and no coloops. One of the main ingredients in the proof of Theorem 1.2 in this case is the above-mentioned formula for the h-vector [2, Theorem 1.2], which we strengthen in Theorem 1.1.

REMARK 1.3. For matroids representable over the field of complex numbers, the intersection-theoretic formula for the h-vector of the broken circuit complex was given in [11], and the connection to the Chern–Schwartz–MacPherson classes was observed in [15, 16]. Varchenko's conjecture on the number of critical points of products of linear forms [23], proved by Orlik and Terao in [20], is equivalent to the central special case of the formula

$$\delta^{n-1} \cap 1_{\mathcal{M},\mathcal{M}^{\perp}} = h_r(BC(\mathcal{M})).$$

Recently, for any matroid, Berget, Eur, Spink, and Tseng proved a very general and closely related formula


$$\sum_{i,j,k,l} \left(\int_{X_E} \alpha^i \beta^j c_k(\mathbb{S}_{\mathbf{M}}^{\vee}) c_l(\mathbb{Q}_{\mathbf{M}}) \right) x^i y^j z^k w^l = \frac{(y+z)^r (x+w)^{n-r+1}}{x+y} T_{\mathbf{M}} \left(\frac{x+y}{y+z}, \frac{x+y}{x+w} \right)$$

summing over all i, j, k, l such that i + j + k + l = n, where $c_k(S_M^{\vee})$ and $c_l(Q_M)$ are tautological Chern classes of M [4, Theorem A]. They used this identity to give another proof of Theorem 1.2. To deduce Theorem 1.2 from their formula, they used the fact [3, 12] that many functions of matroids behave valuatively under matroid polytope subdivisions. This allowed them to reduce key computations to the case of representable matroids and prove them using an algebro-geometric argument, thus avoiding the combinatorics of biflats and biflags. The final part of their proof also employs the fact, proved in [2], that the conormal fan of a matroid is a Lefschetz fan. We refer to [4, Remark 9.9] for a comparison of the two proofs of Theorem 1.2.

EXAMPLE 1.4. We will use two running examples throughout the paper. The first is the graphical matroid of the graph G of the pyramid, whose dual is also the matroid of the pyramid G^{\perp} . The second is the graphical matroid of the graph H of the cube, whose dual is the graphical matroid of the graph H^{\perp} of the octahedron. These are shown in Figure 1 and Figure 2. The f-vectors and h-vectors of their broken circuit complexes are shown in Table 1.

	f -vector of $\overline{\mathrm{BC}}(\mathrm{M})$	h -vector of $\overline{\mathrm{BC}}(\mathrm{M})$
pyramid G	(1,7,17,14)	(1,4,6,3)
cube H	(1, 11, 55, 159, 282, 290, 133)	(1, 5, 15, 29, 40, 32, 11)

Table 1. The f-vectors and h-vectors of the broken circuit complexes of two graphs.







FIGURE 1. The graph G of the pyramid and its dual graph G^{\perp} .






FIGURE 2. The graph H of the cube and its dual graph H^{\perp} .

- 1.2. LAGRANGIAN COMBINATORICS OF MATROIDS. This paper explores the algebraic-combinatorial structure of the conormal Chow ring $A_{\mathrm{M},\mathrm{M}^{\perp}}$ introduced in [2, Section 3.5]. The conormal Chow ring is an extension of the Chow ring A_{M} studied in [13] and [1]. We recall the central combinatorial notions from [2].
 - A biflat F|G of M consists of a flat F of M and a flat G of the dual matroid \mathcal{M}^{\perp} such that they are nonempty, they are not both equal to E, and their union is E.
 - Two biflats F|G and F'|G' of M are compatible if

$$(F \subseteq F' \text{ and } G \supseteq G') \text{ or } (F \supseteq F' \text{ and } G \subseteq G').$$

• A biflag of M is a collection $\mathcal{F}|\mathcal{G}$ of pairwise compatible biflats of M satisfying

$$\bigcup_{F|G\in\mathcal{F}|\mathfrak{G}}F\cap G\neq E.$$

The *length* of $\mathcal{F}|\mathcal{G}$ is k, the number of biflats it contains.

Remark 1.5. Let \mathcal{F} be an increasing sequence of k nonempty flats of M, say

$$\mathfrak{F} = (\varnothing \subsetneq F_1 \subseteq \cdots \subseteq F_k \subseteq E),$$

and let \mathcal{G} be a decreasing sequence of k nonempty flats of \mathcal{M}^{\perp} , say

$$\mathfrak{G} = (E \supseteq G_1 \supseteq \cdots \supseteq G_k \supseteq \varnothing).$$

Then the collection $\mathcal{F}|\mathcal{G}$ consisting of the pairs $F_1|G_1,\ldots,F_k|G_k$ is a biflag of M if and only if

$$F_j \cup G_j = E$$
 for all $1 \le j \le k$ and $F_j \cup G_{j+1} \ne E$ for some $0 \le j \le k$.

See [2, Proposition 2.15] for a straightforward verification.

EXAMPLE 1.6. We write $\mathcal{F}|\mathcal{G}$ as a table with rows \mathcal{F} and \mathcal{G} , augmented with the columns $\varnothing|E$ and $E|\varnothing$. For example, for the square pyramid graph G of Figure 1, 01256|1347 is a biflat and

$$\begin{vmatrix} \varnothing & | \ 01256 & | \ E \\ E & | \ 1347 & | \varnothing \end{vmatrix} \subset \begin{vmatrix} \varnothing & | \ 5 & 56 & 01256 & | \ E \\ E & E & | \ 1347 & | \ \varnothing \end{vmatrix} \subset \begin{vmatrix} \varnothing & | \ 5 & 56 & 01256 & 01256 & | \ E \\ E & E & | \ 1347 & | \ 347 & | \ \varnothing \end{vmatrix} = \begin{vmatrix} \varnothing & | \ 5 & 56 & 01256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & | \ 256 & |$$

are three biflags of biflats; the third one is maximal.

The biflats and biflags of a matroid encode the combinatorics of the conormal fan, described in [2, Section 3.4]. Our main algebraic object of interest is the Chow ring of the conormal fan, which we now define independently. We begin with a polynomial ring $S_{\mathrm{M},\mathrm{M}^\perp}$ with real coefficients and variables $x_{F|G}$ indexed by the biflats of M. For any set of biflats $\mathcal{F}|\mathcal{G}$, we consider the monomial

$$x_{\mathcal{F}|\mathcal{G}} = \prod_{F|G \in \mathcal{F}|\mathcal{G}} x_{F|G}.$$

We also define, for every element i in the ground set E, the linear forms

$$\gamma_i = \sum_{i \in F, F \neq E} x_{F|G}, \quad \overline{\gamma}_i = \sum_{i \in G, G \neq E} x_{F|G}, \quad \delta_i = \sum_{i \in F \cap G} x_{F|G}.$$

These linear forms correspond to certain convex piecewise linear functions on the conormal fan of M [2, Section 3.4]. We write

- $I_{M,M^{\perp}}$ for the ideal generated by the monomials $x_{\mathcal{F}|\mathcal{G}}$, where $\mathcal{F}|\mathcal{G}$ is not a biflag, and
- $J_{M,M^{\perp}}$ for the ideal generated by the linear forms $\gamma_i \gamma_j$ and $\overline{\gamma}_i \overline{\gamma}_j$, for any i and j in E.

Definition 1.7. The conormal Chow ring of M is the quotient

$$A_{\rm M,M^{\perp}} = S_{\rm M,M^{\perp}} / (I_{\rm M,M^{\perp}} + J_{\rm M,M^{\perp}}).$$

The equivalence classes of γ_i and $\overline{\gamma}_i$ in the conormal Chow ring do not depend on i. We denote these classes by γ and $\overline{\gamma}$, respectively.

We note that the equivalence class of δ_i in the conormal Chow ring also does not depend on i: For every biflat F|G, the element i must be in F or in G, and hence

$$\delta_i = \gamma_i + \overline{\gamma}_i - \sum_{F \neq E, G \neq E} x_{F|G}.$$

We write δ for the class of these elements in the conormal Chow ring. In [2, Section 3.5], we constructed the *degree map*

$$\deg: A^{n-1}_{\mathrm{M},\mathrm{M}^{\perp}} \longrightarrow \mathbb{R}, \qquad x_{\mathcal{F}|\mathcal{G}} \longmapsto x_{\mathcal{F}|\mathcal{G}} \cap 1_{\mathrm{M},\mathrm{M}^{\perp}} = \begin{cases} 1 & \text{if } \mathcal{F}|\mathcal{G} \text{ is a biflag,} \\ 0 & \text{if } \mathcal{F}|\mathcal{G} \text{ is not a biflag.} \end{cases}$$

In [2, Theorem 1.2], we gave the following interpretation of h(BC(M)) in terms of the conormal intersection theory of M:

$$\deg(\gamma^k \delta^{n-k-1}) = \gamma^k \delta^{n-k-1} \cap 1_{\mathcal{M},\mathcal{M}^{\perp}} = h_{r-k}(\mathcal{BC}(\mathcal{M})) \text{ for } 0 \leqslant k \leqslant r.$$

As we explained above, a central goal of this paper is to give a bijective proof of this numerical identity.

2. Biflats and biflags of matroids.

Throughout the paper, we will fix a loopless and coloopless matroid M with ground set E of size n+1 and rank r+1. The dual matroid M^{\perp} has rank $r^{\perp}+1:=(n+1)-(r+1)=n-r$.

2.1. Combinatorics of biflags. The following lemma is the combinatorial manifestation of the fact that the conormal fan is pure of dimension n-1. Its proof introduces several ideas that will be useful in what follows.

Lemma 2.1. Every maximal biflag of M has length n-1.

Proof. Let $\mathcal{F}|\mathcal{G}$ be a biflag consisting of biflats $F_1|G_1,\ldots,F_k|G_k$, say

$$\mathfrak{F} = (\varnothing \subsetneq F_1 \subseteq \cdots \subseteq F_k \subseteq E)$$
 and $\mathfrak{G} = (E \supseteq G_1 \supseteq \cdots \supseteq G_k \supseteq \varnothing).$

For every i, we write r_i for the rank of F_i in M and r_i^{\perp} for the rank of G_i in M^{\perp} . We have

$$\sum_{i=1}^{k+1} \left((r_i - r_{i-1}) + (r_{i-1}^{\perp} - r_i^{\perp}) \right) = (r+1) + (r^{\perp} + 1) = n+1.$$

If j is an index satisfying $F_j \cup G_{j+1} \neq E$, then we must have $F_j \neq F_{j+1}$ and $G_j \neq G_{j+1}$, so

$$(r_j - r_{j-1}) + (r_{j-1}^{\perp} - r_j^{\perp}) \ge 2.$$

Since every summand of n+1 is positive, there can be at most n summands, so $k \leq n-1$.

We now show that $\mathcal{F}|\mathcal{G}$ is not maximal if k < n-1. We consider two cases separately.

(1) We have $r_i - r_{i-1} \ge 2$ or $r_{i-1}^{\perp} - r_i^{\perp} \ge 2$ for some i.

Suppose $r_i - r_{i-1} \ge 2$. Choose any flat F with $F_{i-1} \subsetneq F \subsetneq F_i$. If $F \cup G_i \ne E$, then $F|G_{i-1}$ is a biflat, and hence $\mathcal{F}^+|\mathcal{G}^+ := \mathcal{F}|\mathcal{G} \cup F|G_{i-1}$ is a biflag. On the other hand, if $F \cup G_i = E$, then $F|G_i$ is a biflat, and $\mathcal{F}^+|\mathcal{G}^+ := \mathcal{F}|\mathcal{G} \cup F|G_i$ is a biflag.

(2) We have $r_i - r_{i-1} \leqslant 1$ and $r_{i-1}^{\perp} - r_i^{\perp} \leqslant 1$ for all i.

In this case, $(r_i - r_{i-1}) + (r_{i-1}^{\perp} - r_i^{\perp}) \leq 2$ for all i, so at least two summands of n+1 are equal to 2. Therefore, at least two values i=j,j' satisfy $r_i - r_{i-1} = r_{i-1}^{\perp} - r_i^{\perp} = 1$, and hence $F_{i-1} \subsetneq F_i$ and $G_{i-1} \supsetneq G_i$. At least one of these, say j', satisfies that $F_{j'-1} \cup G_{j'} \neq E$. Consider the other one; $F_j | G_{j-1}$ is a biflat, and $\mathcal{F}^+ | \mathcal{G}^+ := \mathcal{F} | \mathcal{G} \cup F_j | G_{j-1}$ is a biflag, because it satisfies $F_{j'-1} \cup G_{j'} \neq E$.

We will often use the following basic result which follows from, for example, [21, Proposition 2.11]; see also [2, Lemma 3.15].

Lemma 2.2. If F and G are nonempty flats of M and M^{\perp} respectively then $|F \cup G| \neq n$.

We close this section with some definitions that will be useful throughout the paper. Let $\mathcal{F}|\mathcal{G}$ be a biflag of M. As above, we write \mathcal{F} and \mathcal{G} for the flags

$$\mathfrak{F} = (\varnothing \subsetneq F_1 \subseteq \cdots \subseteq F_k \subseteq E)$$
 and $\mathfrak{G} = (E \supseteq G_1 \supseteq \cdots \supseteq G_k \supseteq \varnothing),$

where k is the length of $\mathcal{F}|\mathcal{G}$, and $F_0 = G_{k+1} = \emptyset$ and $F_{k+1} = G_0 = E$.

Definition 2.3. The gap sequence of $\mathcal{F}|\mathcal{G}$, denoted $\mathcal{D}(\mathcal{F}|\mathcal{G})$, is the sequence of gaps

$$D_0|D_1|\cdots|D_k$$
, where $D_i := (F_{i+1} - F_i) \cap (G_i - G_{i+1}) = E - (F_i \cup G_{i+1})$.

The notion of gaps appears naturally in the model of the conormal fan as a configuration space [2, Section 2]. Each nonempty gap must have size at least 2, as we noted above.

Definition 2.4. The jump sets of $\mathcal{F}|\mathcal{G}$ are

$$J(\mathcal{F}) = \{j \mid 0 \leqslant j \leqslant k \text{ and } F_j \subsetneq F_{j+1}\},$$

$$J(\mathcal{G}) = \{j \mid 0 \leqslant j \leqslant k \text{ and } G_j \supsetneq G_{j+1}\}.$$

The double jump set is $J(\mathfrak{F}) \cap J(\mathfrak{G})$; the elements of these sets are called jumps of \mathfrak{F} and \mathfrak{G} and double jumps of $\mathfrak{F}|\mathfrak{G}$, respectively.

If the gap D_j is nonempty, then j must be a double jump. Thus, by definition, every biflag has at least one double jump. The double jumps of a biflag $\mathcal{F}|\mathcal{G}$ play an important role throughout the paper, so we mark them \subseteq and \supseteq in the table for $\mathcal{F}|\mathcal{G}$.

EXAMPLE 2.5. Consider the biflag $\mathcal{F}|\mathcal{G}$ given by the table

The biflag has jump sets $J(\mathcal{F}) = \{0, 1, 2, 3\}$ and $J(\mathcal{G}) = \{2, 3, 4\}$. The set of double jumps is $\{2, 3\}$, and the gap sequence is $\varnothing |\varnothing|02|47|\varnothing|$.

Lemma 2.6. The gaps of $\mathfrak{F}|\mathfrak{G}$ are pairwise disjoint, and their union is

$$\bigsqcup_{j=0}^{k} D_j = E - \bigcup_{i=1}^{k} (F_i \cap G_i).$$

Proof. One easily verifies the first claim. For the second, first suppose $e \in F_i \cap G_i$. Then $e \in F_j$ for all $j \ge i$, which means $e \notin D_j$ for $i \le j \le k$. Dually, $e \in G_j$ for all $j \le i$, so $e \notin D_j$ for all $0 \le i \le j - 1$. Now suppose e is not in any gap. In this case, consider the index $1 \le i \le k + 1$ for which $e \in F_i - F_{i-1}$. Since $e \in F_{i-1} \cup G_i$, we must have $e \in G_i$ and hence $e \in F_i \cap G_i$.

2.2. EXTENDED NBC BIFLAGS. In this section, we construct the biflag $\mathcal{F}(B)|\mathcal{G}(B)$ and the extended biflag $\mathcal{F}^+(B)|\mathcal{G}^+(B)$ associated to each nbc basis B of M: These are the biflags we need to give a combinatorial formula for $\gamma^k \delta^{n-k-1}$ in Theorem 1.1.

We begin by recalling some basic facts about matroids on an ordered ground set. For each basis $B \subseteq E$ of M, we write $B^{\perp} := E - B$ for the corresponding dual basis of M^{\perp} . Each $i \notin B$ has a unique dependence on B, that is, there is a unique fundamental circuit C(B,i) contained in $B \cup i$ and containing i. Dually, for each $i \in B$, there is a unique fundamental cocircuit in $B^{\perp} \cup i$ containing i, denoted $C^{\perp}(B,i)$.

Definition 2.7. The externally active set for B in M is defined to be

$$\begin{split} \mathrm{EA}(B) &= \{ i \notin B \mid i = \min C(B,i) \} \\ &= \{ i \notin B \mid B \text{ is the lexicographically largest basis contained in } B \cup i \} \,. \end{split}$$

Dually, the internally active set for B in M is defined to be

$$\begin{split} \mathrm{IA}(B) &= \left\{ i \in B \mid i = \min C^\perp(B,i) \right\} \\ &= \left\{ i \in B \mid B \text{ is the lexicographically smallest basis containing } B - i \right\}. \end{split}$$

The internally passive and externally passive sets of B are IP(B) = B - IA(B) and $EP(B) = B^{\perp} - EA(B)$, respectively.

Activities behave well with respect to matroid duality: The internally active set of B in M equals the externally active set of B^{\perp} , and the externally active set of B in M equals the internally active set of B^{\perp} . According to [9, 22], the Tutte polynomial of M equals

$$T_{\mathcal{M}}(x,y) = \sum_{B} x^{|\operatorname{IA}(B)|} y^{|\operatorname{EA}(B)|}.$$

In particular, for any natural numbers i and e, the number $t_{i,e}$ of bases B of M with $|\operatorname{IA}(B)| = i$ and $|\operatorname{EA}(B)| = e$ is independent of the ordering of the ground set E.

DEFINITION 2.8. We say a basis B of M is a no broken circuit basis or nbc basis if $EA(B) = \emptyset$. This is equivalent to demanding that B does not contain any broken circuit, that is, any set of the form $C - \min C$ where C is a circuit.

We now associate a biflag to each nbc basis of M. We will later see how these biflags arise naturally in the Lagrangian combinatorics of ordered matroids.

PROPOSITION 2.9. (nbc biflags) Let B be a nbc basis with |IA(B)| = k+1. Define the sequence $\mathcal{E}(B) = (e_1, \dots, e_{r-k}, e_{r-k+1}, \dots, e_{n-k-1})$ by the conditions

$$B - IA(B) = \{e_1 > \dots > e_{r-k}\}$$
 and $B^{\perp} - \min B^{\perp} = \{e_{r-k+1} < \dots < e_{n-k-1}\}.$

Let $\mathfrak{F}(B)$ and $\mathfrak{G}(B)$ be the flags of length n-k-1 given by

$$F_{j}|G_{j} = \begin{cases} \operatorname{cl}\{e_{1}, e_{2}, \dots, e_{j}\}|E & \text{for } 1 \leqslant j \leqslant r - k, \\ E|\operatorname{cl}^{\perp}\{e_{j}, e_{j+1}, \dots, e_{n-k-1}\} & \text{for } r - k + 1 \leqslant j \leqslant n - k - 1, \end{cases}$$

where cl and cl^{\perp} stand for the closure operators of M and M^{\perp}. Then $\mathfrak{F}(B)|\mathfrak{G}(B)$ is a biflag of M.

We call $x_{\mathcal{F}(B)|\mathcal{G}(B)}$ an nbc monomial of M.

Proof. Let x be the minimum element of B^{\perp} . We need to verify that

$$\operatorname{cl}(B - \operatorname{IA}(B)) \cup \operatorname{cl}^{\perp}(B^{\perp} - x) \neq E.$$

Assume this is not the case. Since $x \notin \text{cl}^{\perp}(B^{\perp} - x)$, we must have $x \in \text{cl}(B - \text{IA}(B))$. Thus the fundamental circuit C(B,x) satisfies $C(B,x) \subseteq B - IA(B) \cup x$. Since B is nbc, the minimum element of this circuit is some y < x. Also, since $y \in B - IA(B)$, the minimum element in the fundamental cocircuit $C^{\perp}(B,y)$ is some z < y, and hence z < x as well. However, $C^{\perp}(B,y) \subseteq B^{\perp} \cup y$ shows that $z \in B^{\perp}$, contradicting the minimality of x.

EXAMPLE 2.10. We illustrate the construction above with the example of Figure 2. This matroid has n+1=12 elements, rank r+1=7, and corank $r^{\perp}+1=5$. Let us order the ground set $0 < 1 < \cdots < 9 < a < b$. Consider the *nbc* basis B = 015678b, whose internally active set IA(B) = 016 has k+1=3 elements, marked in green. We have $\mathcal{E}(B) = (b, 8, 7, 5; 3, 4, 9, a)$, and $\mathcal{F}(B)|\mathcal{G}(B)$ is given by the table

For each proper flat F_i and proper coflat G_i , we have written in bold the new element e_i that is not present in F_{i-1} and G_{i+1} , respectively.

We now augment each nbc biflag to a maximal biflag containing it. Let B be a nbc basis with

$$IA(B) = \{c_1 > \cdots > c_{k+1}\}.$$

Define the sequence $\mathcal{E}(B)$ and the biflag $\mathcal{F}(B)|\mathcal{G}(B)$ as in Proposition 2.9, and set

$$S = B - IA(B)$$
 and $T = B^{\perp} - \min B^{\perp}$.

PROPOSITION 2.11. (Extended nbc biflags) Let i be the largest index such that

$$c_i \notin \operatorname{cl}(S) \cup \operatorname{cl}^{\perp}(T),$$

or equivalently, the smallest index such that

$$\operatorname{cl}(S, c_1, \dots, c_i) \cup \operatorname{cl}^{\perp}(T) = E.$$

We define the flags $\mathfrak{F}^+(B)$ and $\mathfrak{G}^+(B)$ of length n-1 by inserting the following k columns at the double jump between columns r-k and r-k+1 of the table for $\mathfrak{F}(B)|\mathfrak{G}(B)$:

$$\begin{bmatrix} \operatorname{cl}(S, c_1) & \cdots & \operatorname{cl}(S, c_1, \dots, c_{i-1}) \subsetneq \operatorname{cl}(S, c_1, \dots, c_i) & \cdots & \operatorname{cl}(S, c_1, \dots, c_k) \\ E & \cdots & E & \supsetneq & \operatorname{cl}^{\perp}(T) & \cdots & \operatorname{cl}^{\perp}(T) \end{bmatrix}.$$

Explicitly, we define $\mathfrak{F}^+(B)|\mathfrak{G}^+(B)|$ by setting

$$F_{j}^{+}|G_{j}^{+} = \begin{cases} \operatorname{cl}\{e_{1}, e_{2}, \dots, e_{j}\}|E & \text{for } 1 \leq j \leq r - k, \\ \operatorname{cl}\{S, c_{1}, \dots, c_{j-(r-k)}\}|E & \text{for } 1 \leq j - (r - k) \leq i - 1, \\ \operatorname{cl}\{S, c_{1}, \dots, c_{j-(r-k)}\}|\operatorname{cl}^{\perp}(T) & \text{for } i \leq j - (r - k) \leq k, \\ E|\operatorname{cl}^{\perp}\{e_{j-k}, e_{j-k+1}, \dots, e_{n-k-1}\} & \text{for } 1 \leq j - r \leq n - r - 1. \end{cases}$$

Then $\mathfrak{F}^+(B)|\mathfrak{G}^+(B)$ is a maximal biflag of M.

We call $\mathcal{F}^+(B)|\mathcal{G}^+(B)$ the extended nbc biflag of the nbc basis B.

Proof. The only statement requiring proof is the equivalence between the two different definitions of i. Let i be the largest index for which $c_i \notin \operatorname{cl}(S) \cup \operatorname{cl}^{\perp}(T)$. We verify two statements:

(1) $\operatorname{cl}(S, c_1, \dots, c_{i-1}) \cup \operatorname{cl}^{\perp}(T) \neq E$.

To see this, notice that $c_i \notin \operatorname{cl}(S, c_1, \ldots, c_{i-1})$ because $\{S, c_1, \ldots, c_{i-1}, c_i\} \subseteq B$ is independent.

(2) $cl(S, c_1, ..., c_i) \cup cl^{\perp}(T) = E.$

For this, let $\operatorname{cl}(S, c_1, \dots, c_i) \cup \operatorname{cl}^{\perp}(T) = U$, and consider any element $e \neq \min B^{\perp}$.

- (2-1) If $e \in B^{\perp} \min B^{\perp} = T$, then $e \in U$.
- (2-2) If $e \in IP(B) = S$, then $e \in S \subseteq cl(S) \subseteq U$.
- (2-3) If $e \in IA(B)$, then $e = c_j$ for some index j. If j > i, then by the maximality of i, we have $c_j \in cl(S) \cup cl^{\perp}(T) \subseteq U$. If $j \leqslant i$, then $c_j \in \{S, c_1, \ldots, c_i\} \subseteq U$. In either case, $e \in U$.

We conclude that $U \supseteq E - \min B^{\perp}$. Since $|U| \neq n$ by Lemma 2.2, we must have U = E.

Example 2.12. We continue with Example 2.10, which described the nbc biflag corresponding to the nbc basis B=015678b for Figure 2. We now augment it to a maximal biflag. The set

$$IA(B) = 016 = \{c_1 > c_2 > c_3\}$$

determines the two top row entries to be added, namely,

$$cl(S, c_1) = 5678b$$
 and $cl(S, c_1, c_2) = 1256789ab$.

Notice that i=2 is the largest index for which $c_i \in E - \operatorname{cl}(S) \cup \operatorname{cl}^{\perp}(T) = 12$ and also the smallest index such that $\operatorname{cl}(S, c_1, \ldots, c_i) \cup \operatorname{cl}^{\perp}(T) = E$. Therefore the bottom row entries switch from E to 03469a between positions i-1=1 and i=2:

The resulting table corresponds to the extended nbc biflag $\mathcal{F}^+(B)|\mathcal{G}^+(B)$.

3. A lower bound for
$$\gamma^k \delta^{n-k-1}$$
.

We aim to compute the degree of $\gamma^k \delta^{n-k-1}$ by expressing it as a sum of square-free monomials $x_{\mathcal{F}|\mathcal{G}}$. One fundamental feature of the computation of $\gamma^k \delta^{n-k-1}$, which is simultaneously an advantage and a difficulty, is that there are many different ways to carry it out, since we have n+1 different definitions of γ and δ , namely $\gamma=\gamma_i$ and $\delta=\delta_i$ for every $i\in E$. It is not clear from the outset how one should organize this computation.

To have control over the computation, we require some structure amidst that freedom. To achieve this, we introduce two key tools in this section:

- (Definition 3.3) a canonical way of expanding powers of δ , and
- (Lemma 3.11) a criterion on a monomial m that guarantees that $m \cdot \gamma^k = 0$. As we will see in Section 4, the criterion in Lemma 3.11 shows that most expressions of the form $m \cdot \gamma^k$ vanish in degree n-1. The procedure in Definition 3.3 will provide the combinatorial structure necessary to describe the terms that remain.
- 3.1. THE CANONICAL EXPANSION OF δ^m . Let $\mathcal{F}|\mathcal{G}$ be a biflag and $x_{\mathcal{F}|\mathcal{G}}$ be the corresponding square-free monomial. Recall from Lemma 2.6 that the union of the gaps of $\mathcal{F}|\mathcal{G}$ is nonempty and equals

$$D_0 \sqcup \cdots \sqcup D_k = E - \bigcup_{j=1}^k (F_j \cap G_j).$$

Definition 3.1. (Canonical expansion of $x_{\mathcal{F}|\mathcal{G}} \delta$) For a monomial $x_{\mathcal{F}|\mathcal{G}}$, let

$$e = e(\mathcal{F}|\mathcal{G}) := \max \left(E - \bigcup_{j=1}^{k} (F_j \cap G_j)\right),$$

Define the canonical expansion of $x_{\mathcal{F}|\mathcal{G}}\delta$ to be the expression

$$x_{\mathcal{F}|\mathcal{G}} \delta_e = x_{\mathcal{F}|\mathcal{G}} \sum_{e \in F \cap G} x_{F|G}.$$

We recursively obtain the *canonical expansion* of $x_{\mathcal{F}|\mathcal{G}}\delta^m$ by multiplying each monomial in the canonical expansion of $x_{\mathcal{F}|\mathcal{G}}\delta^{m-1}$ by δ , again using the canonical expansion.

LEMMA 3.2. The canonical expansion of $x_{\mathcal{F}|\mathcal{G}}\delta$ is the sum of the monomials $x_{(\mathcal{F}\cup F)|(\mathcal{G}\cup G)}$ corresponding to the biflags of the form $(\mathcal{F}\cup F)|(\mathcal{G}\cup G)\supsetneq \mathcal{F}|\mathcal{G}$ such that $e\in F\cap G$. If j is the unique index for which $e\in F_{j+1}-F_j$, then $e\in G_j-G_{j+1}$. Furthermore, the nonzero terms correspond to the biflats F|G with $F_j\subseteq F\subseteq F_{j+1}$ and $G_j\supseteq G\supseteq G_{j+1}$.

Proof. The first statement follows directly from definition. For the second one, assume $e \in F_{j+1} - F_j$. Since $e \in F_{j+1}$ but $e \notin F_{j+1} \cap G_{j+1}$, we have $e \notin G_{j+1}$. Since $e \notin F_j$ but $F_j \cup G_j = E$, we have $e \in G_j$. Therefore $e \in G_j - G_{j+1}$ as desired. Finally, if $(\mathcal{F} \cup F)|(\mathcal{G} \cup G)$ is a biflag with $e \in F \cap G$, then $e \notin F_j$ and $e \notin G_{j+1}$ imply that the biflat F|G must be added in between indices j and j+1 of $\mathcal{F}|\mathcal{G}$. Conversely, any such biflat arises in this expansion.

DEFINITION 3.3. (Canonical expansion of δ^m) Given the canonical expansion $\delta^j = x_{\mathcal{F}_1|\mathcal{G}_1} + \cdots + x_{\mathcal{F}_t|\mathcal{G}_t}$, we compute the canonical expansion of $\delta^{j+1} = x_{\mathcal{F}_1|\mathcal{G}_1} \delta + \cdots + x_{\mathcal{F}_t|\mathcal{G}_t} \delta$ by adding the canonical expansions of the individual terms, following Definition 3.1.

We may think of the canonical expansion of δ^m as a recursive procedure to produce a list of biflags of length m, fan $\Sigma_{M,M^{\perp}}$, where each biflag is built up one biflat at a time according to the rules prescribed in Lemma 3.2.

EXAMPLE 3.4. For the graph G of the square pyramid in Figure 1, the canonical expansion of the highest nonzero power of δ in $A_{\mathrm{M.M}^{\perp}}$, namely $\delta^{n-1} = \delta^6$, is

$$\delta^{6} = x_{6|E} \, x_{56|E} \, x_{4567|E} \, x_{E|23467} \, x_{E|347} \, x_{E|7}$$

$$+ x_{7|E} \, x_{57|E} \, x_{4567|E} \, x_{E|23467} \, x_{E|36} \, x_{E|6}$$

$$+ x_{7|E} \, x_{67|E} \, x_{4567|E} \, x_{E|235} \, x_{E|35} \, x_{E|5}.$$

This expression is deceivingly short. Carrying out this seemingly simple computation by hand is very tedious; if one were to do it by brute force, one would find that the number of terms of the canonical expansions of $\delta^0, \ldots, \delta^6$ are the following:

	δ^0	δ^1	δ^2	δ^3	δ^4	δ^5	δ^6	
# of monomials counted with multiplicity	1	29	352	658	383	69	3	
# of distinct monomials	1	29	333	621	370	68	3	

This example shows typical behavior: for small k the number of biflags in the expansion of δ^k increases with k, but as k approaches n-1, increasingly many products $x_{\mathcal{F}|\mathcal{G}} \delta$ are zero, and the canonical expansions become shorter.

Each monomial contribution $x_{\mathcal{F}|\mathcal{G}}$ to the canonical expansion of δ^m is built up through a sequence of monomials

$$1 = x_{\mathcal{F}^0|\mathcal{G}^0}, \quad x_{\mathcal{F}^1|\mathcal{G}^1}, \quad \dots, \quad x_{\mathcal{F}^m|\mathcal{G}^m} = x_{\mathcal{F}|\mathcal{G}},$$

where $x_{\mathcal{F}^{k+1}|\mathcal{G}^{k+1}}$ appears in the canonical expansion of $x_{\mathcal{F}^{k}|\mathcal{G}^{k}}\delta = x_{\mathcal{F}^{k}|\mathcal{G}^{k}}\delta_{e(\mathcal{F}^{k}|\mathcal{G}^{k})}$. We relabel the $e(\mathcal{F}^{k}|\mathcal{G}^{k})$ s, writing $e_{i}=e(\mathcal{F}^{k}|\mathcal{G}^{k})$ if the *i*-th biflat of the final biflag $\mathcal{F}|\mathcal{G}$ is obtained in the canonical expansion of $x_{\mathcal{F}^{k}|\mathcal{G}^{k}}\delta$. Thus both the flat and the coflat of that *i*-th biflat must contain e_{i} . We call the resulting sequence $\mathcal{E}=(e_{1},\ldots,e_{m})$ the arrival sequence of this contribution. We summarize the definition of the canonical expansion of δ^{m} and the arrival sequence of each term in the following proposition.

PROPOSITION 3.5. The canonical expansion of δ^m consists of the monomials $x_{\mathcal{F}|\mathcal{G}}$ indexed by the collection $\mathcal{T}^m_{\mathbf{M},\mathbf{M}^{\perp}}$ of all pairs $(\mathcal{F}|\mathcal{G},\mathcal{E})$ for which

- (1) the biflag $\mathfrak{F}|\mathfrak{G} = \{F_1|G_1,\ldots,F_m|G_m\}$ is a biflag of biflats of M, and
- (2) the arrival sequence $\mathcal{E} = (e_1, \dots, e_m)$ is a sequence of distinct elements of E such that

$$e_i \in F_i \cap G_i$$
 and $e_i = \max \left(E - \bigcup_{j \colon e_j > e_i} (F_j \cap G_j) \right)$ for all $1 \leqslant i \leqslant m$.

In symbols, the following identity holds in the conormal Chow ring of M:

$$\delta^m = \sum_{(\mathcal{F}|\mathcal{G},\mathcal{E}) \in \mathcal{T}_{\mathrm{M},\mathrm{M}^\perp}^m} x_{\mathcal{F}|\mathcal{G}}.$$

We record each pair $(\mathcal{F}|\mathcal{G},\mathcal{E}) \in \mathcal{T}_{\mathrm{M},\mathrm{M}^{\perp}}^{m}$ as a table, where we expand the table of biflag $\mathcal{F}|\mathcal{G}$ by placing element e_i directly below F_i and G_i . Each contribution to the

canonical expansion δ^m comes from such a table.

$$\begin{vmatrix} \varnothing \subsetneq F_1 \subseteq \cdots \subseteq F_d \subseteq F_{d+1} \subseteq \cdots \subseteq F_m | \subseteq E \\ E \supseteq G_1 \supseteq \cdots \supseteq G_d \supseteq G_{d+1} \supseteq \cdots \supseteq G_m \supseteq \varnothing \\ e_1 \cdots e_d e_{d+1} \cdots e_m \end{vmatrix}$$

The canonical expansion of δ^m may contain repeated terms $x_{\mathcal{F}|\mathcal{G}}$ which lead to different tables $(\mathcal{F}|\mathcal{G};\mathcal{E})$ with the same biflat $\mathcal{F}|\mathcal{G}$ but different arrival sequences \mathcal{E} .

EXAMPLE 3.6. Let us revisit the canonical expansion of δ^6 , the highest power of δ , in Example 3.4. The first monomial arises from the following table.

The terms $x_{F_i|G_i}$ arrive to the monomial $x_{\mathcal{F}|\mathcal{G}}$ in the descending order of the e_i s, namely,

$$x_{E|7}x_{6|E}x_{56|E}x_{4567|E}x_{E|347}x_{E|23467}.$$

This means that $x_{E|7}$ is in the canonical expansion of $\delta = \delta_7$, $x_{E|7}x_{6|E}$ is in the canonical expansion of $x_{E|7}\delta = x_{E|7}\delta_6$, $x_{E|7}x_{6|E}x_{56|E}$ is in the canonical expansion of $x_{E|7}x_{6|E}\delta = x_{E|7}x_{6|E}\delta_5$, and so on. The corresponding biflag is $\mathcal{F}(B)|\mathcal{G}(B)$ for the nbc basis B = 0456 with IA(B) = 0, as introduced in Definition 2.9.

The other monomials in our expansion of δ^6 are $x_{7|E} x_{57|E} x_{4567|E} x_{E|23467} x_{E|36} x_{E|6}$ and $x_{7|E} x_{67|E} x_{4567|E} x_{E|235} x_{E|25} x_{E|5}$, which correspond to the biflags of 0457 and 0467, respectively. These are the other two nbc bases whose only internally active element is 0. Note that we must have $0 \in IA(B)$ for any nbc basis B.

This example illustrates a general phenomenon: The case k=0 of Theorem 1.1 says that the terms of the canonical expansion of δ^{n-1} in the conormal Chow ring correspond to the nbc biflags of the nbc bases B of M with |IA(B)| = 1; these are also known as the β -nbc bases of M. They are enumerated by Crapo's beta invariant $\beta_{\rm M} = h_r({\rm BC(M)}) = t_{1,0}({\rm M})$: see [25].

3.2. h_{r-k} -MANY NBC MONOMIALS IN δ^{n-k-1} . To each nbc basis B of M, we associated a sequence $\mathcal{E}(B)$ and a biflag $\mathcal{F}(B)|\mathcal{G}(B)$ in Definition 2.9. We will now show that the table $(\mathcal{F}(B)|\mathcal{G}(B),\mathcal{E}(B))$ satisfies the conditions of Proposition 3.5, and hence the nbc monomial $x_{\mathcal{F}(B)|\mathcal{G}(B)}$ appears in the canonical expansion of δ^{n-k-1} with arrival sequence $\mathcal{E}(B)$, where $k+1=|\operatorname{IA}(B)|$.

EXAMPLE 3.7. For the cube graph of Figure 2 and k = 2, the nbc basis 015678b with IA(B) = 016 gives rise to the nbc biflag of Example 2.10, and the table

S	Ø	b	8b	78b	578b			E	E		
1	E	E	E	E	E	\supseteq	03469a	469a	69a	9	Ø
		b	8	7	5		3	4	9	a	

gives rise to the following nbc monomial in the canonical expansion of δ^8 :

$$x_{\mathbf{b}|E} \, x_{8\mathbf{b}|E} \, x_{78\mathbf{b}|E} \, x_{578\mathbf{b}|E} \, x_{E|03469\mathbf{a}} \, x_{E|469\mathbf{a}} \, x_{E|69\mathbf{a}} \, x_{E|9}.$$

PROPOSITION 3.8. If B is a nbc basis of M with |I(B)| = k+1, then the nbc monomial $x_{\mathcal{F}(B)|\mathcal{G}(B)}$ arises in the canonical expansion of δ^{n-k-1} .

Proof. We verify that $(\mathcal{F}(B)|\mathcal{G}(B),\mathcal{E}(B))$ satisfies the conditions of Proposition 3.5. We know that $\mathcal{F}(B)|\mathcal{G}(B)$ is a biflag by Proposition 2.9, so it remains to show that

$$e = \max \left(E - \operatorname{cl}(\operatorname{IP}(B)_{>e}) - \operatorname{cl}^{\perp}(B_{>e}^{\perp}) \right)$$
 for any $e \in \operatorname{IP}(B)$ or $e \in B^{\perp} - \min B^{\perp}$.

First, we show that $e \in E - \operatorname{cl}(\operatorname{IP}(B)_{>e}) - \operatorname{cl}^{\perp}(B_{>e}^{\perp})$, considering two cases:

- (1) $e \in B^{\perp} \min B^{\perp}$: In this case, $e \notin \operatorname{cl}^{\perp}(B_{>e}^{\perp})$ since B^{\perp} is independent in M^{\perp} . Also, if we had $e \in \operatorname{cl}(\operatorname{IP}(B)_{>e})$, then the fundamental circuit C(B,e) would be contained in $\operatorname{IP}(B)_{>e} \cup e$, and hence its smallest element would be e. Thus e would be externally active in B, contradicting the assumption that B is a nbc basis.
- (2) $e \in \mathrm{IP}(B)$: In this case, $e \notin \mathrm{cl}(\mathrm{IP}(B)_{>e})$ since $\mathrm{IP}(B) \subseteq B$ is independent in M. Also, if we had $e \in \mathrm{cl}^{\perp}(B_{>e}^{\perp})$, then the fundamental cocircuit $C^{\perp}(B,e)$ would be contained in $B_{>e}^{\perp} \cup e$, and hence its smallest element would be e, contradicting that a is internally passive in B.

Now, for the sake of contradiction, let us assume that $\max (E - \operatorname{cl}(\operatorname{IP}(B)_{>e}) - \operatorname{cl}^{\perp}(B_{>e}^{\perp})) = f > e$. We consider three cases:

- (1) $f \in B^{\perp}$: Then f > e would imply $f \in B^{\perp}_{>e} \subseteq \operatorname{cl}^{\perp}(B^{\perp}_{>e})$.
- (2) $f \in IP(B)$: Then f > e would imply $f \in IP(B)_{>e} \subseteq cl(IP(B)_{>e})$.
- (3) $f \in IA(B)$: This means that $f = \min C^{\perp}(B, f)$, so this fundamental cocircuit is contained in $B^{\perp}_{>f} \cup f$. Thus $f \in cl^{\perp}(B^{\perp}_{>f})$ while $f \notin cl^{\perp}(B^{\perp}_{>e})$, which is impossible since $B^{\perp}_{>f} \subseteq B^{\perp}_{>e}$.

This completes the proof.

3.3. Multiplying by a high power of γ eradicates non-initial monomials.

LEMMA 3.9. Consider a monomial $x_{\mathcal{F}|\mathcal{G}}$ and let l be the largest index for which $F_l \neq E$. If $c \notin F_l$, then $x_{\mathcal{F}|\mathcal{G}} \gamma_c$ is the sum of the monomials $x_{(\mathcal{F} \cup F)|(\mathcal{G} \cup G)}$ corresponding to the variables $x_{F|G}$ with $F_l \cup c \subseteq F \subsetneq E$ and $G_l \supseteq G \supseteq G_{l+1}$.

Proof. We have $x_{\mathcal{F}|\mathcal{G}} \gamma_c = x_{\mathcal{F}|\mathcal{G}} \sum_{c \in F \neq E} x_{F|G}$. Now, if $(\mathcal{F} \cup F)|(\mathcal{G} \cup G)$ is a biflag with $c \in F \neq E$, then we must have $F_l \subsetneq F \subsetneq E = F_{l+1}$, so the biflat F|G must be added in between indices l and l+1 of $\mathcal{F}|\mathcal{G}$. Conversely, any such biflat arises in this expansion.

DEFINITION 3.10. Let us call a monomial $x_{\mathcal{F}|\mathcal{G}}$ initial if the distinct flats in \mathcal{F} have ranks $1, 2, \ldots, i$, and r + 1 for some i.

The following technical lemma will play an important role. It shows that the multiplication by a high power of γ eradicates non-initial monomials.

LEMMA 3.11. Let $\mathfrak{F}|\mathfrak{G}$ be a biflag of M, and let s be the number of distinct proper flats in \mathfrak{F} .

- (1) If s + k > r, then $x_{\mathcal{F}|\mathcal{G}} \gamma^k = 0$.
- (2) If s + k = r and \mathcal{F} is not initial, then $x_{\mathcal{F}|\mathcal{G}} \gamma^k = 0$.

Proof. The proof of the first part is nearly identical to and simpler than the proof of the second part. For the second part, as in Lemma 3.9, let l be the largest index for which $F_l \neq E$, and let $c \notin F_l$. We proceed by descending induction on s.

The largest possible value of s for a non-initial flag is r-1. Suppose first that s=r-1 and k=1. If $\mathcal F$ is not initial, we must have $\operatorname{rk} F_l=r$. Lemma 3.9 then implies that

$$x_{\mathcal{F}|\mathcal{G}} \gamma = x_{\mathcal{F}|\mathcal{G}} \gamma_c = \sum_{\substack{F_l \cup c \subseteq F \neq E \\ G_l \supseteq G \supseteq G_{l+1}}} x_{(\mathcal{F} \cup F)|(\mathcal{G} \cup G)} = 0,$$

since the only flat containing F_l , which has corank 1, and c, which is not in F_l , is E.

Now suppose that the result is true for some value of $s \leq r - 1$, and consider any biflag $\mathcal{F}|\mathcal{G}$, where \mathcal{F} has s - 1 distinct proper flats. We have

$$x_{\mathcal{F}|\mathcal{G}} \gamma^{r-(s-1)} = (x_{\mathcal{F}|\mathcal{G}} \gamma_c) \gamma^{r-s} = \sum_{\substack{F_l \cup c \subseteq F \neq E \\ G_l \supseteq G \supseteq G_{l+1}}} x_{(\mathcal{F} \cup F)|(\mathcal{G} \cup G)} \gamma^{r-s} = 0,$$

where each summand is 0 by the inductive hypothesis because each flag $\mathcal{F} \cup F$ that arises is not initial and has s distinct proper flats.

3.4. h_{r-k} -Many extended *NBC* monomials in $\gamma^k \delta^{n-k-1}$. Lemma 3.11 shows that many monomials in δ^{n-k-1} are eliminated when one multiplies them by γ^k . Let us now show that each one of the $h_{r-k}(\mathrm{BC}(\mathrm{M}))$ nbc monomials $x_{\mathcal{F}(B)|\mathcal{G}(B)}$ of Proposition 3.8 resists multiplication by γ^k , and gives rise to its corresponding extended nbc monomial $x_{\mathcal{F}^+(B)|\mathcal{G}^+(B)}$ in $\gamma^k \delta^{n-k-1}$, as introduced in Definition 2.11. We will later see that these are the only monomials that resist multiplication by γ^k .

PROPOSITION 3.12. For every nbc basis B with |IA(B)| = k + 1, we have

$$x_{\mathcal{F}(B)|\mathcal{G}(B)} \gamma^k = x_{\mathcal{F}^+(B)|\mathcal{G}^+(B)}.$$

Proof. Recall from Proposition 2.9 that, if we write

$$S = B - IA(B) = \{e_1 > \dots > e_{r-k}\}, \text{ and}$$

 $T = (E - B) - \min(E - B) = \{e_{r-k+1} < \dots < e_{n-k-1}\},$

then the table of the *nbc* monomial $x_{\mathcal{F}(B)|\mathcal{G}(B)}$ is

where $F_j = \operatorname{cl}(e_1, \dots, e_j)$ for $j \leq r - k$ and $G_j = \operatorname{cl}^{\perp}(e_j, \dots, e_{n-k-1})$ for j > r - k. In particular,

$$F_{r-k} = \text{cl}(S) \text{ and } G_{r-k+1} = \text{cl}^{\perp}(T).$$

We write IA(B) = $\{c_1 > c_2 > \cdots > c_{k+1}\}$, and multiply $x_{\mathcal{F}|\mathcal{G}}$ by $\gamma_{c_1}, \ldots, \gamma_{c_k}$ to compute

$$x_{\mathcal{F}|\mathcal{G}}\gamma^k = x_{\mathcal{F}|\mathcal{G}}\gamma_{c_1}\gamma_{c_2}\cdots\gamma_{c_k}.$$

Since $c_1 \notin F_{r-k}$, when we multiply $x_{\mathcal{F}|\mathcal{G}} \gamma_{c_1}$, Lemma 3.9 tells us that every resulting term $x_{(\mathcal{F} \cup F)|(\mathcal{G} \cup G)}$ corresponds to a biflat F|G such that $F_{r-k} \cup c_1 \subsetneq F \subsetneq E$. Also, for such a term to resist further multiplication by γ^{k-1} , $\mathcal{F} \cup F$ must be an initial flag by Lemma 3.11, so $\operatorname{rk}(F) = r - k + 1$. This implies that $F = \operatorname{cl}(S, c_1)$; we denote F by F_{r-k+1} .

Similarly, since $c_2 \notin F_{r-k+1}$, every term in $x_{\mathcal{F}|\mathcal{G}} \gamma_{c_1} \gamma_{c_2}$ that resists further multiplication by γ^{k-2} must introduce $F_{r-k+2} := \operatorname{cl}(S, c_1, c_2)$ as the new flat in the flag. Continuing with this line of reasoning, we see that the nonzero terms in $x_{\mathcal{F}|\mathcal{G}} \gamma_{c_1} \gamma_{c_2} \cdots \gamma_{c_k}$ are obtained from the table of $x_{\mathcal{F}(B)|\mathcal{G}(B)}$ between columns r-k and r-k+1 as

$$\begin{array}{cccc}
\cdots & \operatorname{cl}(S) \subsetneq \operatorname{cl}(S, c_1) \subsetneq \cdots \subsetneq \operatorname{cl}(S, c_1, \dots, c_k) \subsetneq E & \cdots \\
\cdots & E & \supseteq G'_{r-k+1} \supseteq \cdots \supseteq G'_r & \supseteq \operatorname{cl}^{\perp}(T) & \cdots \\
\hline
e_{r-k} & c_1 > \cdots > c_k & e_{r-k+1}
\end{array},$$

for any choice of coflats $G'_{r-k+1} \supseteq \cdots \supseteq G'_r$, each of which is either E or $\mathrm{cl}^{\perp}(T)$, since $r^{\perp}(T) = r^{\perp} - 1$.

The only freedom we appear to have left is the choice of the unique value of $1 \leq i \leq k+1$ for which $G'_{r-k+i-1} = E$ and $G'_{r-k+i} = \operatorname{cl}^{\perp}(T)$:

$$\begin{array}{ccc}
\cdots & \operatorname{cl}(S, c_1, \dots, c_{i-1}) \subsetneq \operatorname{cl}(S, c_1, \dots, c_i) \cdots \\
\cdots & E & \supsetneq & \operatorname{cl}^{\perp}(T) & \cdots
\end{array}$$

However, for this to be a valid flag, we must have

$$\operatorname{cl}(S, c_1, \dots, c_{i-1}) \cup \operatorname{cl}^{\perp}(T) \neq E$$
 and $\operatorname{cl}(S, c_1, \dots, c_i) \cup \operatorname{cl}^{\perp}(T) = E$.

Therefore, we do not have the freedom to choose i; it must be the smallest index for which $\operatorname{cl}(S, c_1, \ldots, c_i) \cup \operatorname{cl}^{\perp}(T) = E$.

This precisely matches the description of the extended nbc biflag of B in Definition 2.11. Thus the unique surviving term in $x_{\mathcal{F}(B)|\mathcal{G}(B)}\gamma_{c_1}\gamma_{c_2}\cdots\gamma_{c_k}$ is precisely $x_{\mathcal{F}^+(B)|\mathcal{G}^+(B)}$, as we wished to show.

Example 3.13. Let us return to Example 3.7 and multiply the *nbc* monomial of $B=015678\mathrm{b}$ with $\mathrm{IA}(B)=016$ by γ^2 by computing

$$(x_{b|E} x_{8b|E} x_{78b|E} x_{578b|E} x_{E|03469a} x_{E|469a} x_{E|69a} x_{E|9}) \cdot \gamma_6 \cdot \gamma_1.$$

This adds two new columns to the middle of the table in Example 3.7, shown in green. The new entries in the top row must be cl(578b6) = 5678b and cl(578b61) = 1256789ab. The new entries in the bottom row can equal E or 03469a. Since $5678b \cup 03469a \neq E$, and we must have $F_i \cup G_i \neq E$ for all i, the first one must be E. Since $1256789ab \cup 03469a = E$, and we must have $F_i \cup G_{i+1} \neq E$ for some i, the second one must be 03469a. Thus the only possible table is

Ø	b	8b	78b	578b	5678b	1256789ab		E	E	E	E	
E	E	E	E	E	E	03469a	03469a	469a	69a	9	Ø	,
	b	8	7	5	6	1	3	4	9	a		

and the resulting monomial is the extended nbc monomial of B

 $x_{\rm b|E}\,x_{8\rm b|E}\,x_{78\rm b|E}\,x_{578\rm b|E}\,x_{5678\rm b,E}\,x_{1256789{\rm ab},03469{\rm a}}\,x_{E|03469{\rm a}}\,x_{E|469{\rm a}}\,x_{E|69{\rm a}}\,x_{E|9},$ corresponding to the extended nbc biflag of Example 2.12.

We have now made some progress towards our proof of Theorem 1.1, which says that

$$\gamma^k \delta^{n-k-1} = \sum_{\substack{B \, nbc \text{ basis} \\ |\operatorname{IA}(B)| = k+1}} x_{\mathcal{F}^+(B)|\mathcal{G}^+(B)}.$$

Propositions 3.8 and 3.12 show that all terms in the right hand side of this expression do arise in $\gamma^k \delta^{n-k-1}$. Proving that no other terms appear requires significantly more work; this is the content of Section 4.

4. Upper bound for
$$\gamma^k \delta^{n-k-1}$$
.

Proposition 3.5 shows that the terms $x_{\mathcal{F}|\mathcal{G}}$ in the canonical expansion of δ^{n-k-1} are given by the set $\mathcal{T}_{M,M^{\perp}}$ of combinatorially determined tables $(\mathcal{F}|\mathcal{G},\mathcal{E})$. Lemma 3.11 shows that multiplication by high powers of γ eradicates many of these monomials. The main goal of this section will be to characterize those monomials in the canonical expansion of δ^{n-k-1} that resist multiplication by γ^k .

DEFINITION 4.1. A monomial $x_{\mathcal{F}|\mathcal{G}}$ of degree n-k-1 and the corresponding table $(\mathcal{F}|\mathcal{G},\mathcal{E}) \in \mathcal{T}_{M,M^{\perp}}$ are said to be resistant if $x_{\mathcal{F}|\mathcal{G}} \gamma^k \neq 0$ in the conormal Chow ring of M.

We saw in Proposition 3.12 that any nbc monomial does resist multiplication by γ^k , and gives rise to its corresponding extended nbc monomial. We will eventually show in Proposition 4.15 that these are in fact the only resistant monomials, and hence that $\deg(\gamma^k\delta^{n-k-1}) = h_{r-k}(\mathrm{BC}(\mathrm{M}))$. This proof will require several steps, which we carry out in the following subsections.

4.1. THE JUMP SETS OF A RESISTANT TERM OF δ^{n-k-1} . Recall the notion of jump sets of $\mathcal{F}|\mathcal{G}$ from Definition 2.4. We write $\operatorname{Tr}_k M$ for the k-th truncation of M.

LEMMA 4.2. If the monomial $x_{\mathcal{F}|\mathcal{G}}$ arises in the canonical expansion of δ^{n-k-1} and resists multiplication by γ^k , then

- (1) $\mathfrak{F}|\mathfrak{G}$ has a unique double jump, and
- (2) \mathfrak{F} and \mathfrak{G} are complete flags of nonempty flats in $\operatorname{Tr}_k M$ and M^{\perp} , with possible repetitions.

Proof. Since $x_{\mathcal{F}|\mathcal{G}}\gamma^k$ is nonzero, the first part of Lemma 3.11 tells us that \mathcal{F} contains $s \leq r-k$ distinct proper flats, so $|\mathsf{J}(\mathcal{F})| = s+1 \leq r-k+1$. Also, since M^\perp has rank $r^\perp + 1 = n-r$, we have $|\mathsf{J}(\mathcal{G})| \leq n-r$. On the other hand, since a square-free monomial cannot contain repeated terms, $\mathsf{J}(\mathcal{F}) \cup \mathsf{J}(\mathcal{G}) = \{0,1,\ldots,n-k-1\}$. Therefore,

$$n-k\leqslant |\operatorname{J}(\mathfrak{F})\cup\operatorname{J}(G)|+|\operatorname{J}(\mathfrak{F})\cap\operatorname{J}(\mathfrak{G})|=|\operatorname{J}(\mathfrak{F})|+|\operatorname{J}(\mathfrak{G})|\leqslant n-k+1,$$

and the number of double jumps is $|J(\mathcal{F}) \cap J(\mathcal{G})| \leq 1$. But $\mathcal{F}|\mathcal{G}$ has at least one nonempty gap D_d , which guarantees a double jump d.

The above analysis also implies that \mathcal{F} contains s=r-k distinct proper flats — which must have ranks $1,2,\ldots,r-k$ by the second part of Lemma 3.11 — and that \mathcal{G} has flats in every rank of \mathcal{M}^{\perp} .

It follows that any table $(\mathcal{F}|\mathcal{G}, \mathcal{E})$ arising in the canonical expansion of δ^{n-k-1} that resists multiplication by γ^k has the form

where d is the unique double jump of $\mathcal{F}|\mathcal{G}$. We write

$$D := D_d = E - (F_d \cup G_{d+1}) = (F_{d+1} - F_d) \cap (G_d - G_{d+1})$$

for the unique nonempty gap. In every column other than the d-th, one inclusion is strict and the other one is an equality. From now on, we will also record the nonempty gap D in the bottom row of the table $(\mathcal{F}|\mathcal{G};\mathcal{E})$. This is redundant information, but it will be useful visually in the proofs that follow.

REMARK 4.3. For each index i, the flat F_i contains the bottom row entries below it and to its left; namely, e_1, \ldots, e_i , and D if $i \ge d+1$. Similarly, the coflat G_i contains the bottom row entries below it and to its right; e_i, \ldots, e_{n-k-1} , and D if $i \le d$.

We continue with two more easy but important properties of the canonical expansion. The first one tells us that the arrival sequence \mathcal{E} and the index d of the double jump completely determine which inclusions are strict in the table of $(\mathcal{F}|\mathcal{G}, \mathcal{E})$. We define the descent set and ascent set of \mathcal{E} by

$$Des(\mathcal{E}) = \{i : e_i > e_{i+1}\} \text{ and } Asc(\mathcal{E}) = \{i : e_i < e_{i+1}\}.$$

LEMMA 4.4. If $i \in J(\mathfrak{F}) - J(\mathfrak{G})$, then $e_i > e_{i+1}$. If $i \in J(\mathfrak{G}) - J(\mathfrak{F})$, then $e_i < e_{i+1}$. Therefore,

$$J(\mathcal{F}) = Des(\mathcal{E}) \cup \{0, d\} \quad and \quad J(\mathcal{G}) = Asc(\mathcal{E}) \cup \{d, n - k - 1\}.$$

Proof. It is clear from the definitions that $0 \in J(\mathcal{F})$ and $n-k-1 \in J(\mathcal{G})$. By symmetry, it is enough to prove the first assertion. Assume for the sake of contradiction that $i \in J(\mathcal{F}) - J(\mathcal{G})$ and $e_i < e_{i+1}$, so the table of $(\mathcal{F}|\mathcal{G}, \mathcal{E})$ contains

$$\begin{array}{c} \cdots F_i \subsetneq F_{i+1} \cdots \\ \cdots G_i = G_{i+1} \cdots \\ \cdots e_i < e_{i+1} \cdots \end{array} .$$

Then the biflat $F_i|G_i$ arrives to the monomial $x_{\mathcal{F}|\mathcal{G}}$ after the biflat $F_{i+1}|G_{i+1}$ does, so $e_i \notin F_{i+1} \cap G_{i+1}$. This contradicts the fact that $e_i \in F_i \cap G_i \subseteq F_{i+1} \cap G_{i+1}$.

LEMMA 4.5. If i < j and $e_i < e_j$, then $e_i \notin G_j$. If i < j and $e_i > e_j$, then $e_i \notin F_i$.

Proof. It suffices to prove the first assertion. A part of the table of $(\mathcal{F}|\mathcal{G},\mathcal{E})$ reads

$$\begin{bmatrix} F_i \subseteq \cdots \subseteq F_j \\ G_i \supseteq \cdots \supseteq G_j \\ e_i < e_j \end{bmatrix},$$

and hence $F_i|G_i$ appears in the term $x_{\mathcal{F}|\mathcal{G}}$ after $F_j|G_j$ and $e_i \notin F_j \cap G_j$. Since $e_i \in F_i \subseteq F_j$, we must have $e_i \notin G_j$.

4.2. THE RESISTANT TERMS OF δ^{n-k-1} ARE DETERMINED BY THE BOTTOM ROW OF THEIR TABLE. We now show that any resistant table $(\mathcal{F}|\mathcal{G},\mathcal{E})$ is completely determined by the bottom row of its table, that is, by \mathcal{E} , d, and D.

PROPOSITION 4.6. Let $(\mathfrak{F}|\mathfrak{G},\mathcal{E})$, D, and d be as above.

(1) For any $x \in D$, we have

$$B(x) := \{e_{i+1} \mid i \in \mathsf{J}(\mathfrak{F}) - d\} \cup x \text{ is a basis of } \mathrm{Tr}_k \, \mathrm{M}, \text{ and}$$

$$B^{\perp}(x) := \{e_i \mid i \in \mathsf{J}(\mathfrak{G}) - d\} \cup x \text{ is a basis of } \mathrm{M}^{\perp}.$$

(2) For any $x \in D$, the flags \mathfrak{F} and \mathfrak{G} are given by

$$F_{j} = \begin{cases} \operatorname{cl}(\{e_{i+1} \mid i \in \mathsf{J}(\mathcal{F}) - d, i + 1 \leqslant j\}) & \text{if } j \leqslant d, \\ \operatorname{cl}(x \cup \{e_{i+1} \mid i \in \mathsf{J}(\mathcal{F}) - d, i + 1 \leqslant j\}) & \text{if } j > d, \end{cases}$$

$$G_{j} = \begin{cases} \operatorname{cl}^{\perp}(x \cup \{e_{i} \mid i \in \mathsf{J}(\mathcal{G}) - d, i \geqslant j\}) & \text{if } j \leqslant d, \\ \operatorname{cl}^{\perp}(\{e_{i} \mid i \in \mathsf{J}(\mathcal{G}) - d, i \geqslant j\}) & \text{if } j > d. \end{cases}$$

(3) The ranks of the flags \mathcal{F} and \mathcal{G} are given by

$$\operatorname{rk}(F_j) = |\operatorname{J}(\mathfrak{F})_{< j}| \quad and \quad \operatorname{rk}^{\perp}(G_j) = |\operatorname{J}(\mathfrak{G})_{\geqslant j}|.$$

The jump sets $J(\mathcal{F})$ and $J(\mathcal{G})$ are given by Lemma 4.4, and hence \mathcal{F} and \mathcal{G} are determined by \mathcal{E} , d, and D. Thus, the biflag $\mathcal{F}|\mathcal{G}$ is determined by the arrival sequence \mathcal{E} , the double jump d, and the nonempty gap D.

Proof. Let us treat B(x) as an ordered set, ordered from left to right. If $i \in J(\mathcal{F}) - \{d\}$ then $F_i \subsetneq F_{i+1}$ and $\operatorname{rk}(F_{i+1}) = \operatorname{rk}(F_i) + 1$ by the first part of Lemma 3.11. Also, Lemmas 4.4 and 4.5 tell us that $e_i > e_{i+1}$ and $e_{i+1} \notin F_i$. This implies that $F_{i+1} = \operatorname{cl}(F_i \cup e_{i+1})$, and that e_{i+1} is independent from the earlier terms in B(x). For i = d, since $x \in F_{d+1} - F_d$ by definition, we have that $F_{d+1} = \operatorname{cl}(F_d \cup x)$ and x is independent from the earlier terms in B(x). The same argument shows the analogous claims for $B^{\perp}(x)$. This proves the first and the second parts of the proposition. The third part

follows from

$$|\mathsf{J}(\mathfrak{F})_{< j}| = \begin{cases} |(\mathsf{J}(\mathfrak{F}) - d)_{< j}| & \text{if } j \leqslant d, \\ |(\mathsf{J}(\mathfrak{F}) - d)_{< j}| + 1 & \text{if } j > d, \end{cases} \text{ and }$$

$$|\mathsf{J}(\mathfrak{G})_{\geqslant j}| = \begin{cases} |(\mathsf{J}(\mathfrak{F}) - d)_{\geqslant j}| + 1 & \text{if } j \leqslant d, \\ |(\mathsf{J}(\mathfrak{F}) - d)_{\geqslant j}| & \text{if } j > d. \end{cases}.$$

This completes the proof.

4.3. THE RESISTANT TERMS OF δ^{n-k-1} HAVE NO MIXED BIFLATS. Proposition 4.6 tells us that, in order to describe the tables $(\mathcal{F}|\mathcal{G},\mathcal{E})$ arising in the canonical expansion of δ^{n-k-1} that resist multiplication by γ^k , we may focus on the bottom row of their tables, that is, on \mathcal{E} , d, and D. We now pursue this analysis further. Call a biflat F|G mixed if both F and G are proper flats of M and M^{\perp} , respectively.

PROPOSITION 4.7. If the table $(\mathfrak{F}|\mathfrak{G},\mathcal{E})$ arises in the canonical expansion of δ^{n-k-1} and the monomial $x_{\mathfrak{F}|\mathfrak{G}}$ resists multiplication by γ^k , then

- (1) its unique double jump is at d = r k, and
- (2) the resulting monomial $x_{\mathcal{F}|\mathcal{G}}$ has no mixed biflats, and its table is of the form

For the remainder of this subsection, we write Y for the set $E - \{e_1, \ldots, e_{n-k-1}\} - D$ consisting of indices that do not appear in the bottom row of the table of $(\mathcal{F}|\mathcal{G}, \mathcal{E})$ when augmented with the entry D.

EXAMPLE 4.8. Before proving Proposition 4.7, let us illustrate it using Example 2.10. The graphical matroid of the cube shown in Figure 2 has n+1=12 elements, rank r+1=7, and corank $r^{\perp}+1=5$. We saw in Examples 2.10 and 2.12 that, for k=2, one of the resistant tables $(\mathcal{F}|\mathcal{G},\mathcal{E})$ in the canonical expansion of $\delta^{n-k-1}=\delta^8$ is the nbc monomial of the basis B=015678b with IA(B) = 016, given by the table

$$\begin{array}{|c|c|c|c|c|c|c|c|c|} \hline \varnothing & b & 8b & 78b & 578b & \subsetneq & E & E & E & E \\ E & E & E & E & \supsetneq & 03469a & 469a & 69a & a & \varnothing \\ \hline & b & 8 & 7 & 5 & 12 & 3 & 4 & 9 & a & \end{array} .$$

The double jump occurs at d=4 and we have $D=\{1,2\}$ and $Y=\{0,6\}$. For either x=1 or x=2 the flats in \mathcal{F} are the closures of the independent sets b, 8b, 78b, 578b, x578b of M, and the coflats in \mathcal{G} are the coclosures of the independent sets a, 9a, 49a, 349a, x349a of M^{\perp} .

Proof of Proposition 4.7. We first show that min $J(\mathfrak{G}) = d$. Suppose otherwise that \mathfrak{G} has jumps before d, and let j-1 < d be the position at which the first one occurs. Then $\{0,1,\ldots,j-2\} \in J(\mathfrak{F})$, and the table of $(\mathfrak{F}|\mathfrak{G},\mathcal{E})$ reads

Proposition 4.6 guarantees that $\{e_1, \ldots, e_{j-1}\}$ is independent and spans the flat $F_{j-1} = F_j$ of M. Notice that $F_j \neq E$, since j < d. Now, Lemma 4.2 tells us that \mathcal{G} is a complete flag of \mathcal{M}^{\perp} with possible repetitions, so the coflat G_j must be a hyperplane in \mathcal{M}^{\perp} , and hence $C_j = E - G_j$ is a circuit of M. But we have that $G_j \supseteq \{e_j, e_{j+1}, \ldots, e_{n-k-1}\} \cup D$, which implies that $C_j = E - G_j \subseteq \{e_1, \ldots, e_{j-1}\} \cup Y$.

But $\{e_1, \ldots, e_{j-1}\}$ is independent in M, so there must be an element $y \in Y$ such that $y \in C_j$. Then $y \notin G_j$, so $y \in F_j$.

Recall from Proposition 4.6 that $B^{\perp}(x) := \{e_i \mid i \in \mathsf{J}(\mathfrak{G}) - d\} \cup x$ is a basis of M^{\perp} , so its complement $B^{\perp}(x)' := \{e_i \mid i \in \mathsf{J}(\mathfrak{F}) - 0\} \cup (D - x) \cup Y$ is a basis of M , and hence

$$I := \{e_i \mid i \in \mathsf{J}(\mathfrak{F})_{\leqslant d} - 0\} \cup y \text{ is independent in M.}$$

Notice that I is a subset of F_d and $|I| = |\mathsf{J}(\mathcal{F})_{\leqslant d} - 0| + 1 = |\mathsf{J}(\mathcal{F})_{\leqslant d}| + 1$; this contradicts the third part of Proposition 4.6, which says that $\mathrm{rk}(F_d) = |\mathsf{J}(\mathcal{F})_{\leqslant d}|$. We conclude that \mathcal{G} has no jumps before d, that is, $G_1 = \cdots = G_d = E$.

We next show that $\max \mathsf{J}(\mathcal{F}) = d$. Suppose \mathcal{F} has jumps after d, and let j > d be the position at which the first such jump occurs. Since $\mathsf{J}(\mathcal{F}) \cup \mathsf{J}(\mathcal{G}) = \{0,1,\ldots,n-k-1\}$ and we previously showed that $0,1,\ldots,d-1 \notin \mathsf{J}(\mathcal{G})$, we must have $\mathsf{J}(\mathcal{F}) \supseteq \{0,1,\ldots,d-1\}$. Therefore, the table of $(\mathcal{F}|\mathcal{G},\mathcal{E})$ reads

This implies that the basis $B^{\perp}(x)'$ of M contains $J := \{e_1, \ldots, e_d, e_j\} \cup (D-x)$, which must then be independent. But $J \subseteq F_j = F_{d+1}$, and $\operatorname{rk}(F_{d+1}) = d+1$ because \mathcal{F} is a complete flag of $\operatorname{Tr}_k(M)$, with possible repetitions, by Lemma 4.2. Then

$$d+1 \geqslant \text{rk}(|J|) = |J| = d+1 + |D-x|,$$

which implies $D = \{x\}$. It follows that $F_d \cup G_{d+1} = E - x$, contradicting Lemma 2.2. It follows that \mathcal{F} has no jumps after d, that is, $F_{d+1} = \cdots = F_{n-k-1} = E$. We conclude that $J(\mathcal{F}) = \{0, 1, \ldots, d\}$ and $J(\mathcal{G}) = \{d, d+1, \ldots, n-k\}$. The first part of Proposition 4.6 then implies that d = r - k.

The above discussion shows that $x_{\mathcal{F}|\mathcal{G}}$ has no mixed biflats. Furthermore, Lemma 4.4 tells us that $e_1 > \cdots > e_d$ and $e_{d+1} < \cdots < e_{n-k-1}$. This completes the proof. \square

We now strengthen Proposition 4.6: we show that a resistant table $(\mathcal{F}|\mathcal{G},\mathcal{E})$ in the canonical expansion of δ^{n-k-1} is completely determined by the arrival sequence \mathcal{E} .

COROLLARY 4.9. If $(\mathfrak{F}|\mathfrak{G},\mathcal{E})$ be a table arising in the canonical expansion of δ^{n-k-1} such that $x_{\mathfrak{F}|\mathfrak{G}}$ resists multiplication by γ^k , then

$$F_j|G_j = \begin{cases} \operatorname{cl}\{e_1, \dots, e_j\} | E & \text{if } j \leqslant r - k, \\ E|\operatorname{cl}^{\perp}\{e_j, \dots, e_{n-k+1}\} & \text{if } j > r - k. \end{cases}$$

In particular, the biflag $\mathfrak{F}|\mathfrak{G}$ is determined uniquely by the arrival sequence \mathcal{E} .

Proof. This is a direct consequence of the second part of Proposition 4.6, since $J(\mathcal{F}) = \{0, 1, \ldots, r-k\}$ and $J(\mathcal{G}) = \{r-k, r-k+1, \ldots, n-k\}$. Note that \mathcal{E} also determines the nonempty gap $D = E - (F_{r-k} \cup G_{r-k+1})$.

Although the resistant monomials in δ^{n-k-1} do not contain mixed biflats, note however that the multiplication by γ^k may introduce mixed biflats in the canonical expansion of $\gamma^k \delta^{n-k-1}$, as we saw in Section 3.4.

4.4. The resistant terms of δ^{n-k-1} are *NBC* monomials. In order to identify the resistant terms in the canonical expansion of δ^{n-k-1} , we need to recall a few fundamental facts from the theory of basis activities of a matroid M on a linearly ordered ground set, as developed by Tutte [22] and Crapo [9].

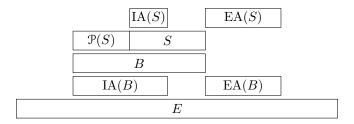


FIGURE 3. Activities for an independent S and its greedy completion to a basis B.

Definition 4.10. For a subset $S \subseteq E$ of the ground set of M, we set

$$IA(S) := \left\{ e \in S \mid \text{there exists a cocircuit } C^{\perp} \subseteq (E - S) \cup e \text{ for which } e = \min C^{\perp} \right\},$$

$$EA(S) := \left\{ e \in E - S \mid \text{there exists a circuit } C \subseteq S \cup e \text{ for which } e = \min C \right\}.$$

The following set will play a very important role. We prove that it can be described in three different but equivalent ways.

Proposition/Definition 4.11. For an independent set $S \subseteq E$ of M, let

$$\mathcal{P}(S) \coloneqq \left\{ e \in E - S \mid \text{there exists a cocircuit } C^{\perp} \subseteq E - S \text{ for which } e = \min C^{\perp} \right\}$$
$$= \left\{ e \in E - S \mid \text{there exists a cocircuit } C^{\perp} \subseteq E - \operatorname{cl}(S) \text{ for which } e = \min C^{\perp} \right\}$$
$$= \operatorname{lexicographically smallest set such that } S \sqcup \mathcal{P}(S) \text{ is a basis.}$$

Proof. The equivalence of the first and third definitions is shown in [9]. To show the equivalence of the first two, suppose $C^{\perp} \subseteq E - S$ is a cocircuit with $e = \min C^{\perp}$. If we had an element $f \in C^{\perp} \cap \operatorname{cl}(S)$, there would be a circuit $C \subseteq S \cup f$ containing f. But then we would have $C \cap C^{\perp} = \{f\}$, which is impossible by Lemma 2.2, so $C^{\perp} \subseteq E - \operatorname{cl}(S)$. This proves one inclusion, and the reverse inclusion is trivial. \square

The next proposition shows that there is a close relationship between S and the lexicographically smallest basis B containing it [17, Section 2].

Proposition 4.12. The following holds for any independent subset $S \subseteq E$ of M.

- (1) $B := S \cup \mathcal{P}(S)$ is the lexicographically smallest basis of M containing S.
- (2) $IA(B) = IA(S) \cup \mathcal{P}(S)$.
- (3) EA(B) = EA(S).

In the upcoming arguments, the reader may find it useful to consult Figure 3, which summarizes Proposition 4.12.

EXAMPLE 4.13. For the matroid of the pyramid in Figure 1 and S=15, we have $\mathcal{P}(S)=23$ and B=1235. Then IA(B)=23, $IA(S)=\varnothing$, and IA(B)=IA(S)=0.

We will make use of the following fact.

LEMMA 4.14. Let S be an independent set of M, and let F = cl(S). If G is a hyperplane of M^{\perp} satisfying $F \cup G \neq E$, then $F \cup G \cup P(S) \neq E$ as well.

Proof. Proposition 4.12 tells us that $B := S \cup \mathcal{P}(S)$ is a basis of M and $\mathcal{P}(S) \subseteq IA(B)$. Thus, for each element $p \in \mathcal{P}(S)$, we can find a unique cocircuit $C^{\perp}(p) \subseteq (E-B) \cup p$ of M for which $p = \min C_p^{\perp}$. Notice that $C^{\perp}(p) \cap \mathcal{P}(S) = \{p\}$. Set $H(p) := E - C^{\perp}(p)$, a hyperplane of M.

We claim $F = \bigcap_{p \in \mathcal{P}(S)} H(p)$. Since each $C^{\perp}(p)$ is contained in E - S we have $S \subseteq \bigcap_{p \in \mathcal{P}(S)} H(p)$. Since the intersection of flats is a flat, $F = \operatorname{cl}(S) \subseteq \bigcap_{p \in \mathcal{P}(S)} H(p)$

as well. On the other hand, each $\mathcal{H}(p)$ is a hyperplane, so the submodular inequality gives

$$\operatorname{rk}\left(\bigcap_{p\in\mathcal{P}(S)}H(p)\right)\leqslant\operatorname{rk}(\mathbf{M})-|\mathcal{P}(S)|=|S|=\operatorname{rk}(F)$$

which proves the claim.

Now, the complement C := E - G is a circuit of M. Let $D = E - (F \cup G) \neq \emptyset$. Then

$$D = (E - F) \cap (E - G) = \left(\bigcup_{p \in \mathcal{P}(S)} C^{\perp}(p)\right) \cap C = \bigcup_{p \in \mathcal{P}(S)} (C^{\perp}(p) \cap C).$$

Since D is nonempty, $C^{\perp}(p) \cap C \neq \emptyset$ for some p. Since $C^{\perp}(p)$ is a cocircuit and C is a circuit, $C^{\perp}(p) \cap C$ – and hence D – contains at least one element $q \neq p$. Since $C^{\perp}(p) \cap \mathcal{P}(S) = \{p\}$, it follows that $q \notin \mathcal{P}(S)$ so $q \notin F \cup G \cup \mathcal{P}(S)$, as desired. \square

In Proposition 4.7, we showed that the terms of the canonical expansion of δ^{n-k-1} that resist multiplication by γ^k are given by tables $(\mathcal{F}|\mathcal{G},\mathcal{E})$ of the form

The following proposition describes precisely which tables arise.

PROPOSITION 4.15. Let S be the independent set $\{e_1 > \cdots > e_{r-k}\}$ of M, and let B be the basis $B = S \sqcup \mathcal{P}(S)$ of M in Proposition 4.12.

- (1) $IA(S) = EA(S) = \emptyset$.
- (2) $EA(B) = \emptyset$, so B is a nbc basis of M.
- (3) $IA(B) = \mathcal{P}(S)$ and |IA(B)| = k + 1.
- (4) $e_i = \min F_i$ for $1 \le i \le r k$.
- (5) $e_i = \min(G_i \mathcal{P}(S)) \text{ for } r k + 1 \le i \le n k 1.$
- (6) $\mathfrak{F}|\mathfrak{G} = \mathfrak{F}(B)|\mathfrak{G}(B)$ and $x_{\mathfrak{F}|\mathfrak{G}}$ is the nbc monomial of the nbc basis B, as in Proposition 2.9.

EXAMPLE 4.16. For the cube graph of Figure 2 and k=2, let us revisit the resistant monomial

$$x_{b|E} x_{8b|E} x_{78b|E} x_{578b|E} x_{E|03469a} x_{E|469a} x_{E|69a} x_{E|9}$$

The arrival sequence $\mathcal{E}=(b,8,7,5;3,4,9,a)$ was computed in Example 4.8. We have S=b875, and its lexicographically smallest completion to a basis is given by $\mathcal{P}(S)=016$. Then B=015678b is indeed a nbc basis with $\mathrm{IA}(B)=016$. Conditions (3) and (4) are easily checked directly, and $\mathcal{F}|\mathcal{G}=\mathcal{F}(B)|\mathcal{G}(B)$ as described in Example 2.10.

We prepare the proof of Proposition 4.15 with some technical lemmas.

Lemma 4.17. Let $(\mathcal{F}|\mathcal{G},\mathcal{E})$ be as in Proposition 4.15.

(1) For each $1 \le i \le r - k$, there is an index $r - k + 1 \le j \le n - k$ such that

$$e_i = \max (E - (F_{i-1} \cup G_i)).$$

It is the smallest index $j \ge r - k + 1$ such that $e_j > e_i$, or j = n - k if there is no such index.

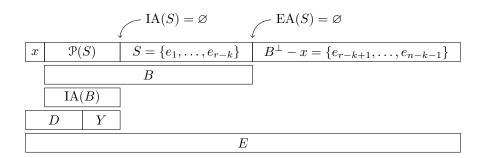


FIGURE 4. Activities and the partition of E.

(2) For each $r - k + 1 \le j \le n - k - 1$, there is an index $0 \le i \le r - k$ such that $e_j = \max (E - (F_i \cup G_{j+1}))$.

It is the largest index $i \leq r - k$ such that $e_i > e_j$, or i = 0 if there is no such index.

Proof. This is a straightforward restatement of Proposition 3.5, since we have determined the table for $(\mathcal{F}|\mathcal{G},\mathcal{E})$ in Proposition 4.7.

Lemma 4.18. Every element of the nonempty gap D is smaller than every e_i .

Proof. The smallest e_i is either e_{r-k} or e_{r-k+1} . If $e_{r-k} < e_{r-k+1}$, then Lemma 4.17 implies that

$$e_{r-k} = \max \left(E - (F_{r-k-1} \cup G_{r-k+1}) \right) \geqslant \max D,$$

where we used $F_{r-k-1} \cup G_{r-k+1} \subseteq F_{r-k} \cup G_{r-k+1} = E-D$. Since $D \cap \{e_1, \dots, e_{n-k-1}\}$ is empty, the inequality is strict. If $e_{r-k} > e_{r-k+1}$, then a similar argument shows $e_{r-k+1} > \max D$.

The first part of Proposition 4.6 tells us that S is independent in M, and the first part of Proposition 4.12 tells us that the set $B := S \sqcup \mathcal{P}(S)$ is a basis: in particular, $|\mathcal{P}(S)| = k+1$. Our next result relates $\mathcal{P}(S)$ with the partition $E = \{e_1, \ldots, e_{n-k-1}\} \sqcup D \sqcup Y$. We illustrate this in Figure 4, which is a refinement of Figure 3 in the case $IA(S) = EA(S) = \emptyset$.

LEMMA 4.19. For $x = \min(E - B) \in D$, we have

$$E - \{e_1, \dots, e_{n-k-1}\} = D \sqcup Y = \mathcal{P}(S) \sqcup \{x\}.$$

Proof. We first show that $\mathcal{P}(S) \subseteq D \sqcup Y$. By way of a contradiction, suppose $e_i \in \mathcal{P}(S)$ for some i. Since $e_1, \ldots, e_{r-k} \in S$, we must have $i \geqslant r-k+1$. By Definition 4.11, there is a cocircuit C^{\perp} for which $e_i = \min C^{\perp}$ and $C^{\perp} \subseteq E - \operatorname{cl}(S) = E - F_{r-k}$. Also, Lemma 4.17 tells us that

$$e_i = \max(E - F_i) \cap (E - G_{i+1})$$
 for some $j \leq r - k$.

However, since $e_i \notin G_{i+1}$ by Lemma 4.5, we have

$$(E - F_j) \cap (E - G_{i+1}) \supseteq (E - F_{r-k}) \cap (E - G_{i+1}) \supseteq C^{\perp} \cap (E - G_{i+1}) \ni e_i.$$

Therefore, we must also have $e_i = \max ((E - G_{i+1}) \cap C^{\perp})$. Since $e_i = \min C^{\perp}$ we must have $(E - G_{i+1}) \cap C^{\perp} = \{e_i\}$, and hence $|G_{i+1} \cup (E - C^{\perp})| = n$; this contradicts Lemma 2.2.

Next we show that there must be an element $x \in D$ that is not in $\mathcal{P}(S)$. To do that, we invoke Lemma 4.14. Since $\operatorname{cl}(S) \cup G_{r-k+1} = F_{r-k} \cup G_{r-k+1} \neq E$, we must

have some element $x \notin F_{r-k} \cup G_{r-k+1} \cup \mathcal{P}(S)$. However, $x \notin F_{r-k} \cup G_{r-k+1}$ means that $x \in D$.

We observe that $|D \sqcup Y| = |E| - |\{e_1, \ldots, e_{n-k-1}\}| = (n+1) - (n-k-1) = k+2$, while $|\mathcal{P}(S)| = |B| - |S| = (r+1) - (r-k) = k+1$. Since our x is not in $\mathcal{P}(S)$, the inclusion $\mathcal{P}(S) \sqcup \{x\} \subseteq D \sqcup Y$ must in fact be an equality.

Finally, Lemma 4.18 and $E-B=\{x,e_{r-k+1},\ldots,e_{n-k-1}\}$ give $x=\min(E-B)$.

LEMMA 4.20. We have the inclusion $Y \subseteq G_{r-k+1}$.

Proof. We have that $Y \subseteq F_{r-k} \cup G_{r-k+1} = E - D$. If the claim were not true, there would be an element $y \in Y$ such that $y \in F_{r-k} = \operatorname{cl}(S)$, so $S \cup y$ would be dependent. But Lemma 4.19 would then imply that $y \in Y \subseteq \mathcal{P}(S)$, contradicting the fact that $S \cup P(S)$ is a basis.

We now prove our description of the resistant terms in the canonical expansion of δ^{n-k-1} .

Proof of Proposition 4.15. We prove parts (4), (5), (1), (2), (3), (6), in that order.

(4) Let $1 \le i \le r - k$. Lemma 4.17 provides a $j \ge r - k + 1$ for which $e_i = \max (E - (F_{i-1} \cup G_j))$. We claim that

$$F_i \cup G_j \subseteq \{e_1, \dots, e_i\} \sqcup \{e_j, e_{j+1}, \dots, e_{n-k-1}\} \sqcup D \sqcup Y.$$

In view of the decomposition $E = \{e_1, \dots, e_{n-k-1}\} \sqcup D \sqcup Y$, this amounts to checking that $e_h \notin F_i \cup G_j$ for i < h < j, which follows from Lemma 4.4.

Now assume, for the sake of contradiction, that $\min F_i = a < e_i$. Since $e_1 > \cdots > e_i$ and $e_{n-k-1} > \cdots > e_j > e_i$, we must have $a \in D \sqcup Y = \mathcal{P}(S) \sqcup x$, by Lemma 4.19. However, $D \cap F_i = \emptyset$ and $a \in F_i$, so a cannot be x. Additionally, $\mathcal{P}(S)$ is independent from S and $a \in F_i \subseteq \operatorname{cl}(S)$, so a cannot be in $\mathcal{P}(S)$ either. We conclude $e_i = \min F_i$ for $i \leq r - k$.

(5) Let $r-k+1 \leqslant j \leqslant n-k-1$. As before, Lemma 4.17 provides a $0 \leqslant i \leqslant r-k$ for which

$$F_i \cup G_j \subseteq \{e_1, \dots, e_i\} \sqcup \{e_j, e_{j+1}, \dots, e_{n-k-1}\} \sqcup D \sqcup Y.$$

We do have $e_j \in G_j - \mathcal{P}(S)$ by Lemma 4.19. Now assume, for the sake of contradiction, that $\min \left(G_j - \mathcal{P}(S)\right) = a < e_j$. Since $e_1 > \dots > e_i > e_j$ and $e_{n-k-1} > \dots > e_j$, we must have $a \in D \cup Y$. But $a \notin \mathcal{P}(S)$ by definition, and $D \cap G_j = \emptyset$ so $a \neq x$. The desired result follows.

(1) If we had $a \in EA(S)$, then $S \cup a$ would contain a circuit C with $a = \min C$. For the largest i with $e_i \in C$, we would then have $C - a \subseteq F_i$. Since C is a circuit and F_i is a flat, this would imply that $a \in F_i$, contradicting that $e_i = \min F_i$ as shown in (4). Thus $EA(S) = \emptyset$.

Suppose we had $e_i \in IA(S)$ for some $1 \le i \le r - k$. Then $e_i \in IA(B)$ by Proposition 4.12, so there is a cocircuit $C^{\perp} \subseteq (E - B) \cup e_i = \{e_{r-k+1}, \ldots, e_{n-k-1}, x, e_i\}$ with $e_i = \min C^{\perp}$. By Lemma 4.18, this means that $x \notin C^{\perp}$. Therefore $C^{\perp} - e_i \subseteq G_{r-k+1}$. In fact, more strongly, $C^{\perp} - e_i \subseteq G_j$ for the smallest $j \ge r - k + 1$ such that $e_j \in C^{\perp}$. But in the dual matroid M^{\perp} , C^{\perp} is a circuit and G_j is a flat, which implies that $e_i \in \operatorname{cl}^{\perp}(C^{\perp} - e_i) \subseteq \operatorname{cl}^{\perp}(G_j) = G_j$. This contradicts Lemma 4.5 since i < j and $e_i < e_j$.

- (2) Proposition 4.12 and (1) tell us that B is a basis and $EA(B) = EA(S) = \emptyset$.
- (3) Proposition 4.12 and (1) tell us that $IA(B) = \mathcal{P}(S)$.

(6) By (2) and (3), we have

$$B - IA(B) = S = \{e_1 > \dots > e_{r-k}\}\$$

and Lemma 4.19 tells us that

$$E - B - \min(E - B) = \{e_{r-k+1} < \dots < e_{n-k-1}\}\$$

Therefore, by Corollary 4.9, the flags \mathcal{F} and \mathcal{G} are precisely the flags $\mathcal{F}(B)$ and $\mathcal{G}(B)$ of the nbc biflag of B, as described in Proposition 2.9.

COROLLARY 4.21. Let $(\mathfrak{F}|\mathfrak{G},\mathcal{E})$ be a table arising in the canonical expansion of δ^{n-k-1} such that $x_{\mathfrak{F}|\mathfrak{G}}$ resists multiplication by γ^k . Then the arrival sequence \mathcal{E} is determined uniquely by the biflag $\mathfrak{F}|\mathfrak{G}$.

Proof. The arrival sequence \mathcal{E} is determined by (4) and (5) of Proposition 4.15. \square

We are finally ready to prove our description of the canonical expansion of $\gamma^k \delta^{n-k-1}$ into monomials.

Proof of Theorem 1.1. Every resistant table $(\mathcal{F}|\mathcal{G},\mathcal{E})$ in the canonical expansion of δ^{n-k-1} gives a nbc monomial $x_{\mathcal{F}(B)|\mathcal{G}(B)}$ by the last part of Proposition 4.15. Every such monomial does appear in this expansion by Proposition 3.8. Furthermore, it appears only once by Corollary 4.21. Therefore, we have

$$\gamma^k \delta^{n-k-1} = \sum_{\substack{Bnbc \text{ basis} \\ |\operatorname{IA}(B)| = k+1}} \gamma^k x_{\mathcal{F}(B)|\mathcal{G}(B)}.$$

The desired formula for $\gamma^k \delta^{n-k-1}$ then follows by Proposition 3.12.

Acknowledgements. The first author thanks the Mathematical Sciences Research Institute, the Simons Institute for the Theory of Computing, the Sorbonne Université, the Università di Bologna, and the Universidad de Los Andes for providing wonderful settings to work on this project, and Felipe Rincón for valuable conversations on this topic.

REFERENCES

- [1] Karim Adiprasito, June Huh, and Eric Katz, *Hodge theory for combinatorial geometries*, Ann. of Math. (2) **188** (2018), no. 2, 381–452.
- [2] Federico Ardila, Graham Denham, and June Huh, Lagrangian geometry of matroids, J. Amer. Math. Soc (2022), to appear.
- [3] Federico Ardila, Alex Fink, and Felipe Rincón, Valuations for matroid polytope subdivisions, Canad. J. Math. 62 (2010), no. 6, 1228–1245.
- [4] Andrew Berget, Christopher Eur, Hunter Spink, and Dennis Tseng, *Tautological classes of matroids*, 2021, https://arxiv.org/abs/2103.08021.
- [5] Anders Björner, The homology and shellability of matroids and geometric lattices, in Matroid applications, Encyclopedia Math. Appl., vol. 40, Cambridge Univ. Press, Cambridge, 1992, pp. 226–283.
- [6] Francesco Brenti, Log-concave and unimodal sequences in algebra, combinatorics, and geometry: an update, in Jerusalem combinatorics '93, Contemp. Math., vol. 178, Amer. Math. Soc., Providence, RI, 1994, pp. 71–89.
- [7] Thomas Brylawski, The broken-circuit complex, Trans. Amer. Math. Soc. 234 (1977), no. 2, 417–433.
- [8] ______, The Tutte polynomial part I: General theory, in Matroid theory and its applications, C.I.M.E. Summer Sch., vol. 83, Springer, Heidelberg, 1982, pp. 125–275.
- [9] Henry H. Crapo, The Tutte polynomial, Aequationes Math. 3 (1969), 211–229.
- [10] Jeremy E Dawson, A collection of sets related to the Tutte polynomial of a matroid, in Graph Theory Singapore 1983, Springer, 1984, pp. 193–204.
- [11] Graham Denham, Mehdi Garrousian, and Mathias Schulze, A geometric deletion-restriction formula, Adv. Math. 230 (2012), no. 4-6, 1979–1994.

- [12] Harm Derksen and Alex Fink, Valuative invariants for polymatroids, Adv. Math. 225 (2010), no. 4, 1840–1892.
- [13] Eva Maria Feichtner and Sergey Yuzvinsky, Chow rings of toric varieties defined by atomic lattices, Invent. Math. 155 (2004), no. 3, 515–536.
- [14] S. G. Hoggar, Chromatic polynomials and logarithmic concavity, J. Combinatorial Theory Ser. B 16 (1974), 248–254.
- [15] June Huh, The maximum likelihood degree of a very affine variety, Compos. Math. 149 (2013), no. 8, 1245–1266.
- [16] _____, h-vectors of matroids and logarithmic concavity, Adv. Math. 270 (2015), 49–59.
- [17] Michel Las Vergnas, The Tutte polynomial of a morphism of matroids—5. Derivatives as generating functions of Tutte activities, European J. Combin. 34 (2013), no. 8, 1390–1405.
- [18] Lucia Lopez de Medrano, Felipe Rincon, and Kristin Shaw, Chern-Schwartz-MacPherson cycles of matroids, Proc. Lond. Math. Soc. (3) 120 (2020), no. 1, 1–27.
- [19] J. H. Mason, Matroids: unimodal conjectures and Motzkin's theorem, in Combinatorics (Proc. Conf. Combinatorial Math., Math. Inst., Oxford, 1972), Inst. Math. Appl., Southend-on-Sea, 1972, pp. 207–220.
- [20] Peter Orlik and Hiroaki Terao, The number of critical points of a product of powers of linear functions, Invent. Math. 120 (1995), no. 1, 1–14.
- [21] James Oxley, Matroid theory, second ed., Oxford Graduate Texts in Mathematics, vol. 21, Oxford University Press, Oxford, 2011.
- [22] W. T. Tutte, On dichromatic polynominals, J. Combinatorial Theory 2 (1967), 301–320.
- [23] A. Varchenko, Critical points of the product of powers of linear functions and families of bases of singular vectors, Compositio Math. 97 (1995), no. 3, 385–401.
- [24] D. J. A. Welsh, Matroid theory, Academic Press [Harcourt Brace Jovanovich, Publishers], London-New York, 1976, L. M. S. Monographs, No. 8.
- [25] Günter M. Ziegler, Matroid shellability, β-systems, and affine hyperplane arrangements, J. Algebraic Combin. 1 (1992), no. 3, 283–300.

Federico Ardila, San Francisco State University, Dept. of Mathematics, 1600 Holloway Ave., San Francisco, CA 94110, USA, Universidad de Los Andes, Depto. de Matemáticas, Cra. 1 #18a-12, Bogotá, Colombia

E-mail: federico@sfsu.edu

Graham Denham, University of Western Ontario, Dept. of Mathematics, Middlesex College, London, Ontario, Canada, N6A 5B7

 $E ext{-}mail: {\tt gdenham@uwo.ca}$

June Huh, Princeton University, Dept. of Mathematics, Fine Hall, 304 Washington Rd., Princeton, NJ 08544, USA

 $E ext{-}mail: \mathtt{huh@princeton.edu}$