

Complex Solutions for Complex Problems? Exploring the Role of Design Task Choice on Learning, Design for Additive Manufacturing Use, and Creativity

Rohan Prabhu

Mechanical Engineering
The Pennsylvania State University
301 Engineering Unit B
University Park, PA – 16802
rohanprabhu@psu.edu
ASME Member

Scarlett R. Miller

Engineering Design, Industrial Engineering
The Pennsylvania State University
213 Hammond Building
University Park, PA - 16802
scarlettmiller@psu.edu
ASME Member

Timothy W. Simpson

Industrial Engineering, Mechanical Engineering
The Pennsylvania State University
University Park, PA – 16802
tw8@psu.edu
ASME Fellow

Nicholas A. Meisel¹

Engineering Design
The Pennsylvania State University
213 Hammond Building
University Park, PA - 16802
nam20@psu.edu
ASME Member

ABSTRACT

The integration of additive manufacturing (AM) processes in many industries has led to the need for AM education and training, particularly on design for AM (DfAM). To meet this growing need, several academic institutions have implemented educational interventions, especially project- and problem-based,

¹ Corresponding Author

for AM education; however, limited research has explored how the choice of the problem statement influences the design outcomes of a task-based AM/DfAM intervention. This research explores this gap in the literature through an experimental study with 175 undergraduate engineering students. Specifically, the study compared the effects of restrictive and dual (restrictive and opportunistic) DfAM education, when introduced through design tasks that differed in the explicit use of design objectives and functional and manufacturing constraints in defining them. The effects of the intervention were measured through (1) changes in participant DfAM self-efficacy, (2) participants' self-reported emphasis on DfAM, and (3) the creativity of participants' design outcomes. The results show that the choice of the design task has a significant effect on the participants' self-efficacy with, and their self-reported emphasis on, certain DfAM concepts. The results also show that the design task containing explicit constraints and objectives results in participants generating ideas with greater uniqueness compared to the design task with fewer explicit constraints and objectives. These findings highlight the importance of the chosen problem statement on the outcomes of a DfAM educational intervention, and future work is also discussed.

1. INTRODUCTION

Additive manufacturing (AM) processes have revolutionized several disciplines, such as engineering, sciences, and arts [1]. As research is constantly improving the effectiveness of AM processes, there is a simultaneous need for integrating AM into the engineering design process [2–4]. This growing need to integrate AM into engineering design has resulted in the emergence of design principles specifically aimed at designing for AM (DfAM) [5,6]. Further, the development of a workforce skilled in AM has been identified to be of importance [7] as well as a possible obstacle [8] in facilitating this integration of AM into industry [4,9].

In order to enable the successful integration and use of AM processes, it is necessary to develop educational practices that effectively teach DfAM [10]. These educational practices must not only inform designers of the characteristics of the different AM processes but also about their capabilities and

limitations. In addition, designers must also learn how to design for these capabilities through opportunistic DfAM, while accommodating the limitations through restrictive DfAM [11,12]. Opportunistic DfAM encourages the use of the capabilities of AM through design principles such as (1) mass customization [13], (2) part consolidation [14] and printed assemblies [15], (3) free shape complexity [16–18], (4) embedding external components [19], and (5) printing with multiple materials [20]. In contrast, restrictive DfAM helps designers account for the limitations of AM processes. This includes considerations for limitations such as (1) support structures [21], (2) warping due to thermal stresses [22], (3) anisotropy [23,24], (4) surface roughness due to stair-stepping [25,26], and (5) feature size and accuracy [27].

To meet this growing need for a workforce skilled in AM and DfAM, an increasing number of institutions, academic and professional, are introducing AM educational interventions. Given the effectiveness of task-based teaching, especially for manufacturing education [28–30], several of these interventions employ some form of problem- or project-based learning techniques. However, limited research has explored the effect of the choice of the design task on the learning outcomes of the AM/DfAM educational intervention. This is important as previous research has demonstrated that the effectiveness of inductive-learning techniques is influenced by the characteristics of the task chosen [31–33], particularly for domain-specific interventions [34]. These characteristics include the level of specificity in terms of the domain and the task, and the number and complexity of constraints imposed. Given the domain-specific nature of AM education, the choice, context, and complexity of the design task could potentially influence the learning effectiveness of a task-based educational intervention. The present study aims at exploring this relationship by investigating AM design tasks with varying functional requirements and manufacturing constraints. The effect of the design task choice is assessed based on the participants' DfAM learning and use and the creativity of their design outcomes

2. RELATED WORK

To investigate the effects of the DfAM task choice on the students' learning and creativity, prior research in the areas of inductive learning, AM education, and the role of design task characteristics in learning and creativity were explored. Research questions are then posed in Section 3 and our experimental methodology is described in Section 4. Results are presented in Section 5 followed by conclusions in Section 6.

2.1. Task-based learning in engineering education

Engineering continues to play an important role in addressing global challenges such as environment, sustainability, health, and many more [35,36]. To address the constantly changing nature of these challenges, several researchers have recommended a transformation of engineering education [37–41], particularly towards developing problem-solving skills [42]. Researchers in education have shown *meaningful learning* to be characterized by the ability to transfer knowledge to solve problems [43–49] as opposed to the mere reproduction of information [50,51], or rote learning. Similarly, higher levels of learning have been linked to the ability to use knowledge to analyze, evaluate, and create new information [52].

Inductive, task-based teaching techniques have emerged to replace traditional deductive teaching in engineering education to address this need for learning transfer. Deductive teaching techniques present students with theories and is followed by introducing the applications for the concepts.

In contrast, inductive teaching presents students with a problem or a task and encourages them to seek and apply the information needed to solve it [28,53]. Stemming from the Deweyan theories of constructivism [54], inductive teaching has been evaluated to be at least as effective as, and in several cases better than, deductive teaching [28]. This teaching technique has been adopted in several forms including (1) inquiry-based learning [55–59], (2) problem-based learning (PmBL) [60–64], (3) project-based learning (PjBL) [65–67], (4) case-based teaching [68,69], (5) just-in-time teaching [70], and (6) discovery learning

[71,72]. Of these techniques, PmBL and PjBL have been used widely in engineering education, particularly manufacturing education [28,73]. PmBL suggests the generation of solutions to open-ended problems, facilitated by the instructor [74]. Similarly, PjBL employs an open-ended project statement, and students are tasked with solving the project by designing and developing an artifact over a period of time, individually or in groups [75]. With the increase in the use of inductive task-based learning techniques in several disciplines, researchers have also demonstrated the role of the characteristics of the task in its effectiveness as a learning tool, as discussed next.

2.2. Role of characteristics of the design task in learning and creativity

The characteristics of the problem statement have been found to play an important role in the success of inductive learning [31–33] since the cognitive strategies used for problem-solving are often task-specific [34]. Depending on an individual's understanding and proficiency in problem-solving, problem solvers transition from the initial problem state to the solution state through the use of certain process operators [76]. Specifically, higher levels of expertise are shown to correlate with the development of the ability to identify the domain of a problem and generate specific solutions for it. This technique opposes that of non-experts who tend to use a generic problem-solving strategy for all problems [77]. The generation of such a domain-specific problem-solving technique is particularly important when developing a DfAM educational intervention. The intervention must encourage designers to contextualize the problem within the capabilities and limitations of AM. Further, designers must be engaged in applying DfAM knowledge to solve the problem.

In addition to the domain of a problem, the 'structuredness' of the problem influences the process followed to attain a solution. Jonassen [78] contrasts well-structured problems from ill-structured problems and presents the differences in the implications for instructional design for the two. Well-structured problems are described to have limited rules and a convergent solution. These problems are specific to the domain to which they are designed for and are often predictable. Ill-structured problems, in contrast, have

multiple solutions and fewer rules that define them [79]. These problems – often termed ‘puzzles’ – are open-ended and do not rely on domain knowledge for the attainment of a solution. While some researchers suggest the use of ill-structured problems in design challenges given their resemblance to real-world, ‘messy’ problems [80,81], others suggest using well-structured problems for domain-specific learning given their effectiveness [77].

The role of the design task characteristics, particularly the constraints, has also been explored in the context of creativity [82]. The abstraction and specificity of the task have been shown to influence the creativity of idea generation. Some researchers argue that a moderate amount of constraints imposed both externally and internally, correlate with increased creativity [83,84]. On the other hand, researchers have demonstrated that tasks with greater specificity result in ideas with lower novelty [85]. This reduced creative production has been attributed to the preferred access of known factual knowledge in the idea generation process [86], potentially resulting in fixation [87,88].

These studies highlight the influence of design task characteristics such as the domain, specificity, and constraint complexity on the solutions generated for the task. Given this influence and the domain-specific nature of AM education, it is important for researchers and educators to choose appropriate tasks for AM/DfAM education. However, limited research has explored this relationship between design task characteristics and AM design outcomes. The next section discusses the current practices in AM/DfAM education and the use of task-based learning in these initiatives.

2.3. Current teaching practices in AM education

In the case of manufacturing education, inductive learning techniques have been extended to the use of (rapid) prototyping as a proven method for developing manufacturing skills [30]. Given the success of inductive teaching techniques for engineering education, especially manufacturing education, several AM/DfAM interventions employ task-based learning. This use of inductive learning is further supported by the recommendations from the 2013 NSF workshop on AM education [4]. One of the key

recommendations from the workshop was the need for AM education to not just encourage the learning of AM process knowledge, but also develop the ability to apply this knowledge towards new product design.

To meet this need for an AM-skilled workforce, several academic institutions have introduced PmBL and PjBL interventions for teaching AM. One such initiative is the AM course introduced at the University of Texas at Austin and Virginia Tech. This course presents students with a design problem, teaches them to choose the appropriate process for it, and then apply AM process knowledge to solve the problem [89]. Similarly, Williams et al. [90] discuss the use of a vehicle design competition as an effective PjBL technique for teaching DfAM skills. Previous research has also explored the use of workshops for DfAM education for industry professionals that encourage them to leverage the potential of AM [91,92]

Complementing these formal educational avenues, academic institutions have also taken up initiatives to provide students with access to AM. These initiatives rely on hands-on self-guided learning through direct or indirect interaction with AM. Initiatives that provide students with indirect access to AM include the 3D printing vending machine [93] deployed at Virginia Tech, and the maker commons established at Penn State [94] and Georgia Tech [95]. Students can get their AM design printed by submitting their print files online, or in person. These initiatives help students experience the design process involved in manufacturing parts using AM. On the other hand, initiatives that encourage learning through direct interaction with AM include Penn State's mobile maker space [96], and MIT's and Case Western's networks of maker spaces [97,98]. These initiatives provide students with direct hands-on interaction with AM, where students can not only design but also print their AM designs themselves. Further, the maker spaces at MIT and Case Western also allow students to combine AM with traditional manufacturing processes for building their parts. These self-learning initiatives give students the freedom to choose their own project and apply AM and DfAM knowledge to solve them.

Alongside these self-learning interventions that focus on AM processes, researchers have also attempted to provide tools for conceptual learning and application of DfAM. One such example is the DfAM Worksheet developed by Booth et al. [99] which assists students in assessing the AM

appropriateness of a design. Similarly, Bloesch-Paidosh and Shea [100] demonstrated the use of DfAM heuristics as a tool for encouraging the use of opportunistic DfAM in the early stages of the design process. Researchers have also attempted to merge traditional tools such as the theory of inventive problem solving (TRIZ) [101] into DfAM to improve the manufacturability of AM designs [102]. These tools encourage students' learning of the various DfAM concepts by engaging them in applying these concepts towards solving problems.

In summary, the various AM and DfAM interventions reviewed here employ design activities, either to teach the different DfAM concepts or to assess the learning effectiveness of the intervention itself. However, limited research has explored the effect of variations in the problem statement on the designers' AM design outcomes. This is important as previous research has demonstrated the influence of design task characteristics on design and learning outcomes. Therefore, the present study explores this gap in literature by investigating the interaction between the design task and the designers' learning and use of DfAM, as well as the creativity of the design outcomes.

3. RESEARCH QUESTIONS

Based on the review of the literature, this study explores the influence of design task choice – specifically the explicit inclusion of design objectives and functional and manufacturing constraints – on designers' learning and the creativity of their AM design outcomes. To do this, we seek to answer the following three research questions.

RQ1: How does the design task choice affect the participants' self-efficacy in using DfAM? We hypothesize that the explicit inclusion of design objectives and constraints in the design task would encourage students to use DfAM to satisfy the constraints and achieve the objectives. This engagement with DfAM would translate into an increase in their self-efficacy with the concepts of DfAM. This hypothesis is based on previous research where the use of well-structured problem statements – those that

present all elements of the problem to the learners [103] – have been shown to correlate with greater learning of domain knowledge [77].

RQ2: How does the design task choice affect the participants' self-reported emphasis on opportunistic and restrictive DfAM? Similar to the previous research question, we hypothesize that the explicit inclusion of design objectives and constraints in the design task would encourage a greater use of DfAM to satisfy the constraints and achieve the objectives. This application of DfAM concepts would translate into a greater self-reported emphasis on DfAM by the participants who undertook the design task with explicit objectives and constraints.

RQ3: How does the design task choice affect the creativity of the participants' AM designs? We hypothesize that the freedom provided by the *lack* of explicit design objectives and manufacturing constraints would result in the generation of ideas with greater uniqueness. This hypothesis is based on prior work where instructing students to think in specific directions has been shown to reduce idea novelty [85].

4. METHODOLOGY

To answer these research questions, an experiment was conducted that involved a short-duration intervention lecture and an AM design challenge. The details are discussed next.

4.1. Participants

The experiment was conducted at a large northeastern public university in the United States, where participants ($N = 222$) were recruited from a junior-level mechanical engineering course focused on product design and engineering design methods. The experiment was conducted in both the fall and spring semesters with $N_f = 123$ participants in the fall semester and $N_s = 99$ participants in the spring semester. The participants consisted of sophomores ($N_f = 0$, $N_s = 1$), juniors ($N_f = 78$, $N_s = 83$), seniors ($N_f = 41$, $N_s = 7$), and 5th year seniors ($N_f = 2$, $N_s = 0$). The remaining participants did not specify their year of study. The

participants' self-reported previous experience in AM and DfAM was collected at the beginning of the study as summarized in Figure 1.

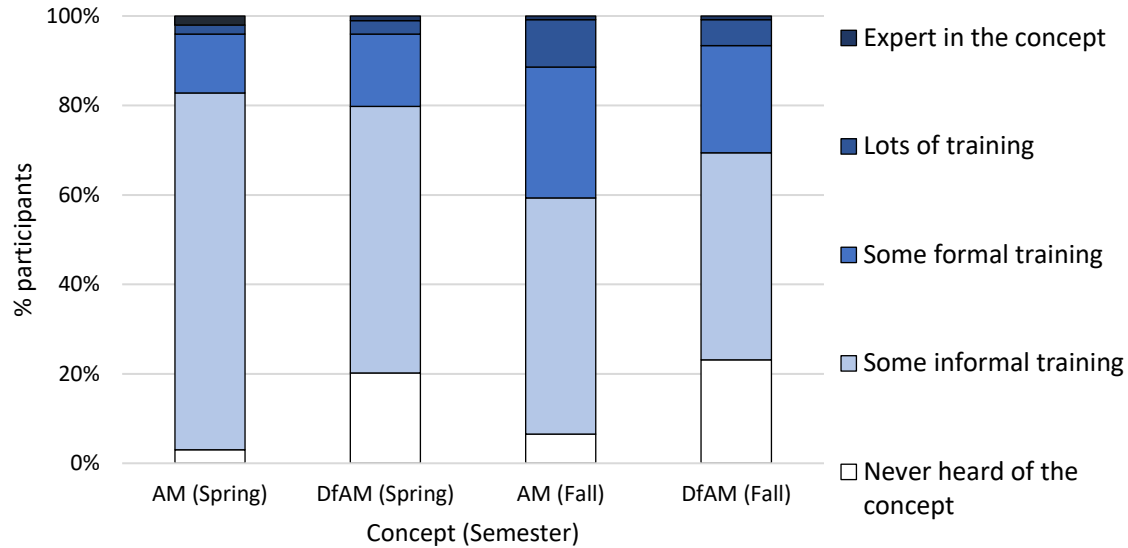


Figure 1 Distribution of participants' previous experience

4.2. Procedure

The experiment was conducted in the second and third weeks of the fall and spring semesters, respectively. Each semester, experimentation was divided into three stages: (1) a pre-intervention survey, (2) a DfAM education lecture, and (3) an AM design challenge and a post-intervention survey. The study was approved by the Institutional Review Board, and implied consent was obtained from the participants before conducting the experiment in both semesters. Figure 2 summarizes the progression of the different experimental stages.

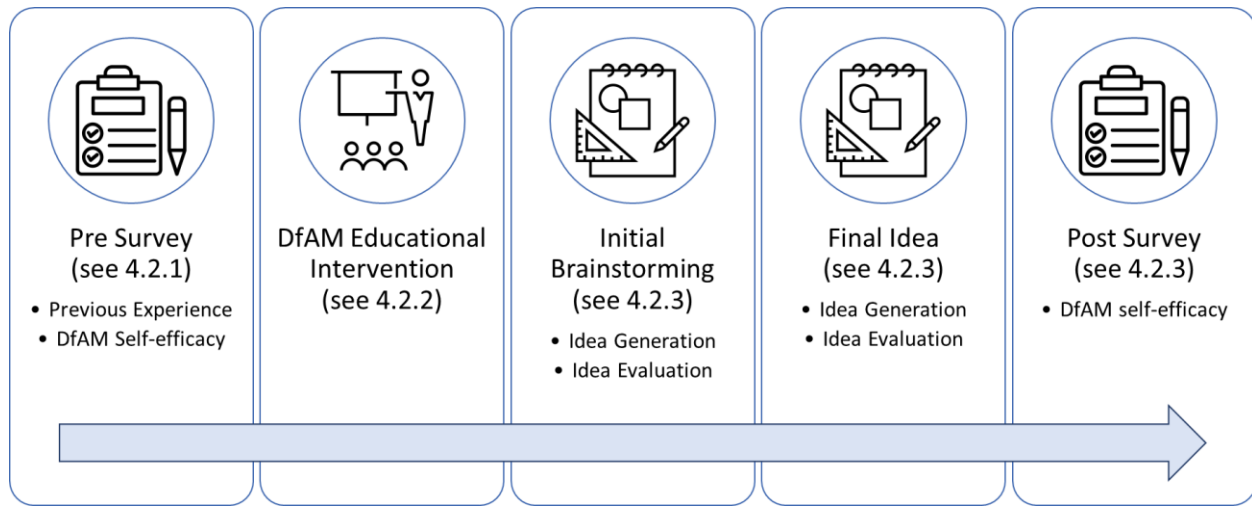


Figure 2 Summary of the experimental procedure

4.2.1. Pre-intervention survey:

At the beginning of the experiment, the participants were asked to complete a pre-intervention survey. The survey captured their previous experience in AM and DfAM, and their self-efficacy with DfAM concepts (see Section 4.3.1). This data provided a baseline for their initial knowledge and comfort levels with DfAM before participating in the experiment.

4.2.2. DfAM Education Lectures:

The DfAM educational content was presented to the participants after they completed the pre-intervention survey. The participants each semester were split into two different groups: (1) restrictive DfAM and (2) opportunistic and restrictive (dual) DfAM. The distribution of the participants in each semester is shown in Table 1. These groups were chosen as restrictive DfAM is necessary for ensuring the manufacturability of AM designs, whereas opportunistic DfAM considerations are an additional set of tools that help improve design performance. This can be seen in the discussion presented in [99], where the use of restrictive DfAM concepts have been shown to successfully reduce print failure.

Table 1 Distribution of participants between the two semesters

	Restrictive DfAM	Dual DfAM
Design task <i>without</i> explicit constraints and objectives (Spring)	47	52
Design task <i>with</i> explicit constraints and objectives (Fall)	67	56

All participants were first given a 20-minute overview lecture on general AM process characteristics. This lecture discussed topics including the material extrusion process (the AM process available to the participants in the AM design challenge), differences with subtractive manufacturing, the digital thread, the Cartesian coordinate system, and common filament materials. Next, all participants were given a 20-minute lecture on restrictive DfAM considerations, including build time, feature size, support material, anisotropy, surface finish, and warping. The restrictive DfAM group was then asked to leave the room during the final DfAM lecture. The dual DfAM group was then given a 20-minute lecture on opportunistic DfAM considerations, including geometric complexity, mass customization, part consolidation, printed assemblies, multi-material printing, and embedding. The lecture slides can be accessed at [104].

4.2.3. Design Challenge and Post-intervention Survey:

In the final part of the experiment, all participants were asked to individually participate in a design challenge. The participants in the spring were given a design task, with fewer explicit manufacturing constraints and functional requirements. The design task asked the participants to:

“Design a fully 3D-printable solution to enable hands-free viewing of content on a smartphone. You can design your solution to fit any phone of your choice. Design such that you use the least amount of print material as possible. It should also print as fast as possible.”

Participants in the fall semester were given a design task with explicitly defined manufacturing constraints and functional requirements. Specifically, the design task in the fall semester asked the participants to:

“Design a fully 3D printable free-standing tower for a down-scaled wind turbine. The tower must support a motor-blade assembly and must attach to the assembly through a T-slot of given dimensions. The assembly must be able to slide into the slot and stay in place. The motor-blade assembly will include the male side of the t-slot. The objective of the challenge is to minimize the print material and the print time as much as possible while satisfying the following set of constraints.

Given the scaling factors of the turbine, the tower must meet the following constraints:

- 1. The height of the tower must be at least 18 inches (as measured from the ground to the motor).*
- 2. The tower must support the motor (150 grams) assembled with the blades (150 grams).*
- 3. The tower can have a maximum base footprint of 3.5” X 3.5”.*
- 4. All components necessary must be completed in one build within the build volume of 11.6” X 7.6” X 6.5”.*

These tasks were chosen for the experiment as they require minimal domain-specific knowledge beyond AM (as suggested by [105]). Further, the cell phone holder task was chosen such that it would impose fewer explicit constraints on the solution space and reduce the specificity of the task. As a result, participants are given the freedom to employ a wide range of working principles to solve the stated problem. On the other hand, the wind turbine problem was chosen given the ease with which functional and manufacturing constraints could be placed on the solution space. One such example is the constraint of building an 18” tall structure that would fit in a build volume with a maximum dimension of 11.6”. Further, the problem statements specifically asked participants to design a fully 3D printable solution as the main aim of this study was to explore the participants’ DfAM learning and integration in engineering design. Keeping the choice of manufacturing processes open would have required the participants to be trained in

traditional DFMA principles as well, and prior research has demonstrated the potential confounding effect this traditional DFMA training could bring into the study [106].

Participants from both semesters were first asked to spend 10 minutes individually brainstorming their own solutions using an idea generation card to record each idea for consistency (see Figure 3), with 7 minutes allocated for sketching, and 3 minutes allocated for describing each idea in words. The participants were then given 5 minutes to evaluate each idea and note down their strengths and weaknesses. The participants were then given 7 minutes to individually design a final idea with the freedom to redesign, combine, or brainstorm again. After completing the design challenge, the participants were asked to complete a post-intervention survey with the same DfAM self-efficacy questions as in the pre-intervention survey.

The timeline followed in the experiment was approximately determined based on previous research such as [107] and pilot studies conducted at the authors' university. This breakdown, though not strictly enforced, kept the participants moving through the different stages of the design process and ensured that they focused on the task at hand. This timeline also helped ensure the experiment could be successfully accommodated in the class/lab time allocated to the course from which the participants were recruited. Further, both tasks were given the same distribution of time to prevent the possible confounding effect that differences in time could have.

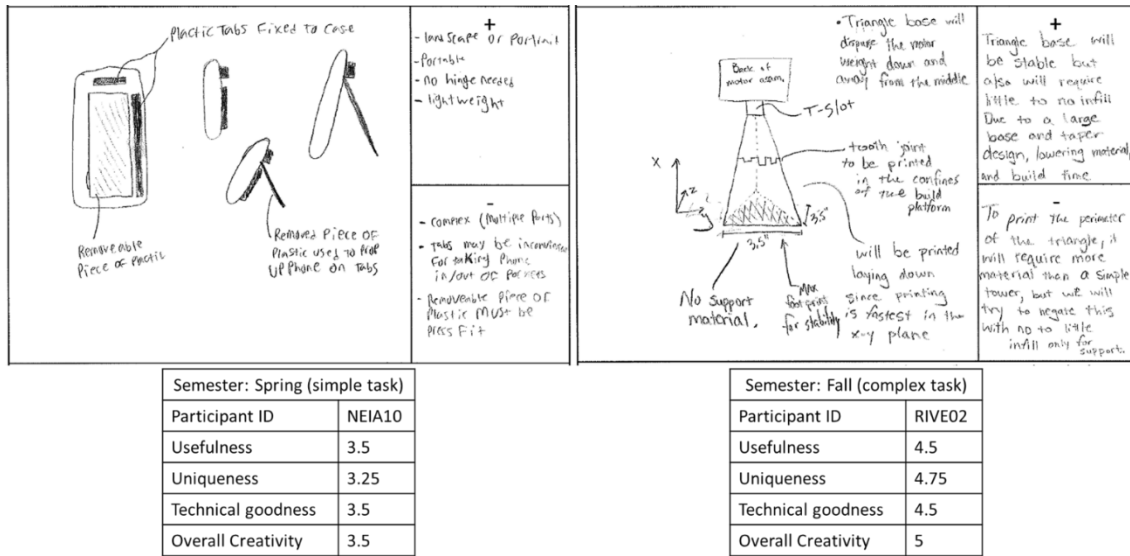


Figure 3 Examples of design outcomes from the design challenge with respective CAT scores

4.3. Metrics

To measure the effect of the design task choice on the participants' learning and the creativity of the outcomes from the AM design challenge, the following metrics were developed.

4.3.1. DfAM Self-efficacy

Previous research has demonstrated the role of self-efficacy [108] and meta-cognition [45] in predicting effective learning. Self-efficacy has also been shown to predict ones' performance in engineering design [109], computer science [110,111], and sports [112,113]. Therefore, the self-efficacy survey from [10,114] was used to assess participants' learning of DfAM. The survey focusses on both the opportunistic and restrictive DfAM domains [12] as summarized in Table 2. Further, it uses a 5-point scale (see Table 3) derived from Bloom's Taxonomy [52] to measure participants' DfAM self-efficacy. The participants were asked to rate their self-efficacy with *each* concept in Table 2 on the scale in Table 3. A difference between the participants' pre- and post-intervention self-efficacy scores was calculated to measure the change in their self-efficacy.

Table 2 Items from the DfAM self-efficacy survey (O: opportunistic, R: restrictive)

#	<i>DfAM Self-efficacy Item</i>
O1	Making products that can be customized for each different user
O2	Combining multiple parts into a single product or assembly
O3	Designing parts with complex shapes and geometries
O4	Embedding components such as circuits in parts
O5	Designing products that use multiple materials in a single part or component
R6	Using support structures for overhanging sections of a part
R7	Designing parts to prevent them from warping and losing shape
R8	Designing parts that have different material properties (e.g. strength) in different directions
R9	Accommodating desired surface roughness in parts
R10	Accommodating for min and max feature size permitted by a process

The internal consistency of the scale was validated by performing a reliability analysis, and a high Cronbach's α was observed [115] (pre-intervention $\alpha = 0.93$, post-intervention $\alpha = 0.86$). Similarly, the individual opportunistic and restrictive sections of the scale also showed a high internal consistency, as determined by Cronbach's α (opportunistic: pre-intervention $\alpha = 0.88$, post-intervention $\alpha = 0.77$, and restrictive: pre-intervention $\alpha = 0.88$, post-intervention $\alpha = 0.80$). Despite the validation of the internal consistency of the scale, it must be noted that the self-efficacy scale discussed in this section has only been used to assess short-term changes in DfAM self-efficacy. Future work must investigate if these perceptions of self-efficacy are sustained over time and if they relate to long-term skill development. Therefore, the study uses metrics beyond just self-efficacy explain and support the observations made using the changes in participants' self-efficacy. These metrics are discussed next.

Table 3 Scale used for DfAM self-efficacy

Never heard about it	Have heard about it but not comfortable explaining it	Could explain it but not comfortable applying it	Could apply it but not comfortable regularly integrating it with my design process	Could feel comfortable regularly integrating it with my design process
----------------------	---	--	--	--

4.3.2. Self-reported use of DfAM

In addition to explore changes in participants' perceived learning of DfAM, it was also important to understand if this learning translated in the participants integrating the various DfAM concepts in their design outcomes. The items shown in Table 4 were used to capture the participants' self-reported emphasis on the different DfAM techniques when coming up with their design outcomes during the AM design challenge. This scale was developed in [10,114] using the same set of items as the self-efficacy scale. Participants were asked to rate “*the importance they gave to each DfAM technique when coming up with their final design*” on a 5-point Likert-type scale, with 1 = ‘Not important at all’ to 5 = ‘Absolutely essential’.

Table 4 Scale used for measuring participants' self-reported emphasis on DfAM.

#	<i>DfAM Emphasis Item</i>
1	The product <u>can be customized</u> for each different user
2	The design <u>combines multiple parts</u> into a single part or assembly
3	The design contains <u>complex shapes and geometries</u>
4	The design contains <u>embedded components</u> such as circuits
5	The design uses <u>multiple materials</u> in a single part or component
6	The design accommodates for <u>support structures</u> in overhanging sections
7	It is designed to <u>prevent warping</u> and losing shape during manufacturing
8	It is designed to accommodate <u>variations in material properties</u> (e.g. strength) in different directions
9	The design accounts for desired <u>surface roughness</u> in the parts
10	The design considers <u>minimum and maximum feature size</u> permitted by a process

4.3.3. Consensual Assessment Technique for Design Creativity

The creativity of the outcomes from the AM design challenge was assessed using the Consensual Assessment Technique (CAT) [105,116,117]. The AM design outcomes were independently evaluated by two quasi-experts with a background in DfAM (as suggested by [118,119]). A moderate to high inter-rater reliability was observed between the two raters, as verified by an average measures Interclass Correlation Coefficient = 0.712 [95% CI 0.687, 0.743] [120]. The following metrics were provided to the raters, as

suggested by the three-factor model [121,122]. The raters were asked to rate the ideas on a scale from 1 to 6, where, for example, 1 = least useful and 6 = most useful:

- *Usefulness*: Assesses the quality of the design in its ability to solve the given design problem. This metric focusses on the value and appropriateness of the resulting solution.
- *Uniqueness*: Assesses the originality and novelty of each solution. The uniqueness is evaluated in comparison to the pool of solutions generated in the sample [105].
- *Technical Goodness*: Assesses the level to which each solution suits the AM processes, both in terms of capabilities and limitations.
- *Overall Creativity*: Provides a subjective evaluation of the overall creativity of the idea as measured by experts.

An average score for each metric was then calculated by taking a mean of the scores from the two raters for each design (see Figure 3 for examples of ideas and their assigned CAT scores).

5. RESULTS

To answer the three research questions, a statistical analysis of participant data was performed using a statistical significance level of $\alpha = 0.05$ and a 95% confidence interval. After accounting for missing data, a sample size of 175 (vs. the original sample of 222) was used. Of these, 87 participants received restrictive DfAM education ($N_f = 46$, $N_s = 41$), and 88 participants received dual DfAM education ($N_f = 44$, $N_s = 44$). All reported results are mean (M) $\pm$ standard error unless otherwise specified. The descriptive statistics for each metric collected from the experiment are presented in Figure 4.

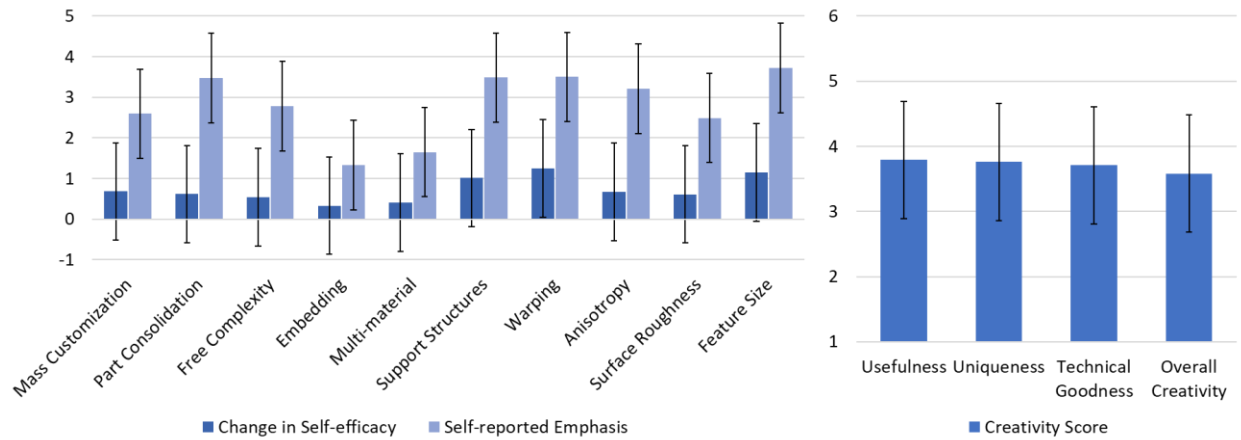


Figure 4 Descriptive statistics for each metric (mean $\pm$ SD)

RQ1: How does the design task choice affect the participants' self-efficacy in using DfAM?

To answer the first research question, a two-way analysis of variance (ANOVA) was performed. Specifically, the design task choice and the educational intervention group were taken as the between-subject variables, and items from the self-efficacy scale in Section 4.3.1 were used as dependent variables. While there were no outliers in the data as verified using three standard deviations, the data was not normally distributed as assessed by the Shapiro-Wilk test [123]. Despite this violation of normality, the test was performed, given the robustness of the ANOVA to deviations from normality.

The results of the ANOVA showed no significant *interaction* between design task choice and the educational intervention group for 9 of the 10 DfAM items. A significant interaction was only observed for the change in self-efficacy with respect to feature size ($F(1,171) = 4.35, p = 0.04$, partial $\eta^2 = 0.03$).

Therefore, the main effects of the design task choice and the educational intervention group on DfAM self-efficacy were analyzed, including a Bonferroni correction. The main effect results in Table 5 show significant differences in the change in participants' self-efficacy in *mass customization*, *warping*, *material anisotropy*, and *surface roughness* between the two design tasks. For these DfAM concepts, the participants who received the *design task with no explicit constraints and objectives* reported a *greater increase* in their self-efficacies compared to those who received the design task with explicit constraints

and objectives. Further, an analysis of the main effects of the educational intervention group revealed a greater increase in participants' self-efficacy with *surface roughness* among those who received restrictive DfAM training; however, the effect sizes were relatively small. The results did not show a main effect of the educational intervention group on the other DfAM concepts.

Due to the observed interaction between the educational intervention group and design task choice when predicting self-efficacy with feature size, an analysis of the simple main effects was conducted. The results showed a similar trend as that with the other DfAM concepts – those who received the design task with no explicit constraints and objectives reported a greater increase in self-efficacy compared to those who received the design task with explicit constraints and objectives. However, this difference was only seen among the participants who received restrictive DfAM education and not in the group that received dual DfAM education. Similarly, an analysis of the simple main effects of educational intervention group revealed a greater increase in self-efficacy among participants who received restrictive DfAM education compared to dual DfAM education, and this was seen only among those who received the design task without explicit constraints and objectives. The implications of these results are discussed in Section 6.1.

Overall, these results refute our hypothesis that the explicit inclusion of objectives and constraints in the design task would encourage a greater use of DfAM to meet the constraints and requirements. Further, we see that using the design task with fewer explicit constraints and objectives results in a greater increase in participants' self-efficacies with certain DfAM concepts.

Table 5 Main Effects of Educational Intervention Group and Design Task Choice on Participants' DfAM Self-efficacy

DfAM Concept	Educational Intervention Group					Design Task Choice				
	<i>F</i>	Partial η^2	<i>p</i>	Means (SE)		<i>F</i>	Partial η^2	<i>p</i>	Means (SE)	
				Restrictive	Dual				Simple	Complex
Mass Customization	0.95	0.01	0.33	0.60 (0.14)	0.78 (0.14)	17.43	0.09	<0.001	1.09 (0.14)	0.29 (0.13)
Part Consolidation	0.38	0.00	0.54	0.56 (0.13)	0.67 (0.13)	2.52	0.02	0.11	0.47 (0.13)	0.76 (0.13)
Free Complexity	0.23	0.00	0.63	0.50 (0.12)	0.58 (0.12)	0.24	0.00	0.63	0.50 (0.13)	0.58 (0.12)
Embedding	0.21	0.00	0.65	0.30 (0.10)	0.36 (0.10)	0.54	0.00	0.47	0.38 (0.11)	0.28 (0.10)
Multi-Material	0.43	0.00	0.51	0.46 (0.12)	0.35 (0.12)	3.84	0.02	0.05	0.58 (0.12)	0.24 (0.12)
Support Structures	2.28	0.01	0.13	1.15 (0.13)	0.88 (0.13)	0.98	0.01	0.32	1.10 (0.13)	0.92 (0.13)
Warping	0.14	0.00	0.14	1.29 (0.12)	1.23 (0.12)	4.82	0.03	0.03	1.45 (0.13)	1.07 (0.12)
Anisotropy	0.03	0.00	0.87	0.66 (0.13)	0.69 (0.13)	12.45	0.07	0.001	1.00 (0.13)	0.36 (0.13)
Surface Roughness	4.76	0.03	0.03	0.81 (0.12)	0.44 (0.12)	11.46	0.06	0.001	0.91 (0.12)	0.34 (0.12)
Feature Size*	4.66¹	0.03¹	0.03¹	1.66 (0.21)¹	1.02 (0.21)¹	7.32³	0.04³	0.01³	1.66 (0.21)³	0.87 (0.20)³
	0.60 ²	0.00 ²	0.44 ²	0.87 (0.20) ²	1.09 (0.21) ²	0.06 ⁴	0.00 ⁴	0.81 ⁴	1.02 (0.21) ⁴	1.09 (0.21) ⁴

*Significant interaction effects observed, simple main effects reported

¹Simple Task, ²Complex Task, ³Restrictive DfAM, ⁴Dual DfAM

Statistically significantly higher mean values highlighted

RQ2: How does the design task choice affect the participants' self-reported emphasis on opportunistic and restrictive DfAM?

To answer the second research question, a two-way ANOVA was performed. The design task choice and the educational intervention group were taken as the between-subject variables, and the items from the self-reported DfAM emphasis scale discussed in Section 4.3.2 were used as dependent variables. While there were no outliers in the data, the data was determined to be not normally distributed; however, we proceeded with the ANOVA due to its robustness.

The results showed no significant two-way interaction between the design task choice and the educational intervention group on the participants' self-reported emphasis on DfAM. This result suggests that the effect of the design task choice was same on both educational groups. Therefore, an analysis of the main effects of the design task choice and the educational intervention group was performed, with a Bonferroni correction included. The results showed a significant effect of the design task choice on the participants' emphasis on certain DfAM concepts (see Table 6). Specifically, participants who were given the *design task with fewer explicit constraints and objectives* reported a higher emphasis on *mass customization, multi-material printing, surface roughness, and feature size* than those who received the design task with explicit constraints and objectives. On the other hand, participants who were given the *design task with explicit constraints and objectives* reported a higher emphasis on *part consolidation, free complexity, and embedding*, compared to those who received the design task without explicit constraints and objectives. Finally, the results showed no main effect of the educational intervention group on the participants' self-reported emphasis on DfAM. The implications of these results are discussed in Section 6.2.

In summary, these results support our hypothesis that the explicit inclusion of constraints and objectives in the design task would encourage the participants to employ DfAM concepts, particularly the opportunistic ones, to satisfy the constraints and requirements of the design task.

Table 6 Main Effects of Educational Intervention Group and Design Task Choice on Participants' Self-reported Emphasis on DfAM

DfAM Concept	Educational Intervention Group					Design Task Choice				
	<i>F</i>	Partial η^2	<i>p</i>	Means (SE)		<i>F</i>	Partial η^2	<i>p</i>	Means (SE)	
				Restrictive	Dual				Simple	Complex
Mass Customization	0.88	0.01	0.35	2.53 (0.12)	2.68 (0.12)	21.07	0.11	<0.001	2.98 (0.12)	2.22 (0.12)
Part Consolidation	0.45	0.00	0.50	3.39 (0.13)	3.51 (0.13)	42.75	0.2	<0.001	2.86 (0.13)	4.05 (0.13)
Free Complexity	2.52	0.02	0.11	2.65 (0.12)	2.91 (0.12)	6.07	0.03	0.02	2.57 (0.12)	2.98 (0.12)
Embedding	0.05	0.00	0.82	1.33 (0.08)	1.31 (0.08)	10.15	0.06	0.002	1.14 (0.08)	1.50 (0.08)
Multi-Material	0.00	0.00	0.95	1.66 (0.11)	1.65 (0.10)	4.18	0.02	0.04	1.80 (0.11)	1.50 (0.10)
Support Structures	0.37	0.00	0.55	3.53 (0.13)	3.42 (0.13)	2.21	0.01	0.14	3.34 (0.13)	3.61 (0.13)
Warping	3.46	0.02	0.07	3.65 (0.11)	3.35 (0.11)	0.39	0.00	0.54	3.45 (0.12)	3.55 (0.11)
Anisotropy	0.08	0.00	0.78	3.18 (0.12)	3.23 (0.11)	1.44	0.01	0.23	3.11 (0.12)	3.30 (0.11)
Surface Roughness	0.26	0.00	0.61	2.54 (0.12)	2.46 (0.12)	6.86	0.04	0.01	2.72 (0.12)	2.28 (0.12)
Feature Size	0.03	0.00	0.86	3.74 (0.12)	3.71 (0.12)	8.07	0.05	0.01	3.47 (0.12)	3.97 (0.12)
Statistically significantly higher means highlighted										

RQ3: How does the design task choice affect the creativity of the participants' AM designs?

To answer the third research question, four two-way ANOVAs were performed to check for interaction effects between the educational intervention group and the design task choice. Each creativity metric—uniqueness, usefulness, technical goodness, and overall creativity—was used as the dependent variable, and the educational intervention group and design task choice were used as independent variables. Although the data showed no outliers, the data was found to be not normally distributed. The results of the ANOVA showed no significant two-way interactions between the independent variables ($p > 0.05$). Therefore, the main effects of the educational intervention group and the design task choice were tested, with a Bonferroni correction.

The results of the analysis – as summarized in Table 7 – indicate that there was only a statistically significant difference in the uniqueness of the design outcomes between the two design tasks. No main effects of the educational intervention group were observed. The participants who received the design task with explicit constraints and objectives showed a higher mean uniqueness score ($M = 4.07 \pm 0.11$) compared to those who received the design task without explicit constraints and objectives ($M = 3.43 \pm 0.12$). However, no significant differences were seen in the scores for usefulness, technical goodness, and overall creativity. These results refute our hypothesis that the lack of specific objectives and constraints in the cell phone holder design challenge would result in the generation of ideas with greater variety. The implications of these results are discussed in Section 6.3.

Table 7 Main Effects of Educational Intervention Group and Design Task Choice on the Creativity of Participants' Design Outcomes

Creativity Metric	Educational Intervention Group					Design Task Choice				
	<i>F</i>	Partial η^2	<i>p</i>	Means (SE)		<i>F</i>	Partial η^2	<i>p</i>	Means (SE)	
				Restrictive	Dual				Simple	Complex
Usefulness	0.02	0.00	0.89	3.78 (0.07)	3.79 (0.07)	0.01	0.00	0.93	3.79 (0.08)	0.78 (0.07)
Uniqueness	2.71	0.02	0.10	3.61 (0.12)	3.88 (0.12)	15.23	0.08	<0.001	3.43 (0.12)	4.07 (0.11)
Technical Goodness	3.27	0.02	0.07	3.60 (0.08)	3.81 (0.08)	3.60	0.02	0.06	3.82 (0.08)	3.59 (0.08)
Overall Creativity	1.51	0.01	0.22	3.48 (0.10)	3.66 (0.10)	3.70	0.02	0.06	3.44 (0.10)	3.70 (0.10)
Statistically significantly higher means highlighted										

6. DISCUSSION AND IMPLICATIONS

The goal of this research was to explore the role of design task choice on the participants' DfAM self-efficacy, their self-reported use of DfAM, and the resulting influence on the creativity of the design outcomes. Three main findings were observed from the results of the study:

- Design task choice influenced the participants' DfAM self-efficacy, but only with certain DfAM concepts.
- Design task choice affects participants' self-reported emphasis on the different DfAM concepts, opportunistic as well as restrictive.
- Participants who were given the design task with explicit objectives and constraints generated ideas with greater uniqueness compared to those who were given the design task with fewer explicit constraints and objectives.

The implications of these findings are discussed next.

6.1. Design task choice influences participants' DfAM self-efficacy

Previous research has demonstrated the effect of the design task characteristics on the effectiveness of task-based learning [31–33]. Further, self-efficacy has been demonstrated to correlate with effective learning [124]. Therefore, the first research question was developed to explore the influence of design task choice on the change in the participants' self-efficacy with the different DfAM concepts. The results showed that the design task with fewer explicit constraints and objectives was successful in bringing about a greater increase in the participants' self-efficacy in *mass customization*, *material anisotropy*, and *surface roughness*. This result suggests that the lack of specific constraints and objectives potentially provides participants with greater opportunity to apply these DfAM concepts, and this rehearsal of concepts could result in the participants feeling greater comfort in using them after the design challenge. For example, several participants from the spring group mentioned that their designs “could fit a phone of any size”, thus emphasizing

mass customization. Despite being given the freedom to design for any cellphone of their choice, universal fit and customization could be an external constraint added by the participants to improve functionality, as discussed by [125]. This result, therefore, demonstrates the potential advantage of using a design task with fewer explicit constraints and objectives for encouraging participants' learning and use of certain DfAM concepts.

However, we must be careful in making these inferences given the small effect sizes observed in the results. This could be attributed to the short duration of the educational intervention. The rapid introduction of several topics in a relatively short time period could have reduced the effectiveness of the intervention, and future research must explore these effects with a refined educational intervention. Further, the differences in the functional context of the design tasks could also have influenced the participants' use of the various DfAM concepts. For example, while cell phone holders can be designed to be mass-customized to fit different cell phone sizes, mass customization and modularity is rarely the focus when designing wind turbine towers. Similarly, wind turbine tower design expects a focus on the strength and loading conditions during operation, and this is not an important focus when designing cell phone holders. These differences in functional context could have influenced the observed effects, and future work must explore this effect in isolation.

6.2. Design task choice influences the participants' self-reported emphasis on DfAM concepts

The results of the first research question demonstrated the influence of design task choice on the participants' DfAM self-efficacy. However, it is important to understand whether these variations in the design task also translated into the participants' self-reported use of DfAM. The second research question was developed to explore these effects.

The first observation from the results was that participants who received the design task with *fewer* explicit constraints and objectives reported a greater emphasis on the opportunistic

DfAM concepts of *mass customization* and *multi-material printing*, and the restrictive DfAM concepts of *surface roughness* and *feature size*. These results reinforce the findings of the first research question where a design task with fewer constraints and objectives demonstrated the potential to bring about a greater increase in participants' self-efficacy in mass customization and surface roughness. The participants' emphasis on mass customization could be attributed to the freedom enabled by the lack of specific constraints to generate several customizable designs, as demonstrated in previous research [85]. The greater freedom and lack of constraints could have resulted in the participants introducing their own constraints such as universal fit and shock absorption, as suggested by [125]. As seen in the previous research question, several participants mentioned that their designs "could fit any phone". These external constraints could have encouraged the participants to leverage the capabilities of mass customization and multi-material printing into their solutions. This finding also highlights the potential influence of the design task context on participants' use of the various DfAM concepts. As discussed in Section 6.1, participants' inclusion of external constraints such as universal fit and protective coating could have been attributed to the context of a cell phone holder. The wind turbine tower task, on the other hand, could have engaged the participants to include a different set of functional aspects such as strength and loading conditions.

The second observation was that participants who received the design task with explicit constraints and objectives reported a greater emphasis only on the opportunistic DfAM concepts of *part consolidation*, *freedom of complexity*, and *embedding functionalities*. Previous results have shown that students tend to simplify their AM designs when given an opportunity to do so [126]. Therefore, a design task with explicit constraints and objectives potentially encourages participants to employ the capabilities of AM such as freedom of geometric complexity to improve the functionality of their designs. For example, most solutions from the cell phone holder task consisted of simple, primitive geometries given the ease with which the requirements of the task could be

achieved. On the other hand, the added constraints in the wind turbine tower task encouraged the use of complex features to meet the constraints. For example, since the participants were expected to build an 18" tall tower in an 11.6"x7.6"x6.5" build volume, most designs employed assembly features to attach multiple components together, adding part and assembly complexities to the solution. This is an interesting observation as it suggests that educators must employ design tasks with a greater number of explicit constraints to encourage designers to fully leverage the capabilities of AM. On the other hand, the participants do not report a corresponding greater emphasis on restrictive DfAM, which could potentially result in the generation of solutions with poor manufacturability. Therefore, when employing a design task with explicit constraints, educators must ensure a strong emphasis is given to restrictive DfAM concepts to ensure successful fabrication with the AM process. This could possibly be achieved by using a combination of design activities with varying constraint definitions to teach different opportunistic and restrictive DfAM concepts.

Finally, care must be taken when making these inferences as the observed effect sizes are relatively low. This could be attributed to the use of Likert-type scales for capturing the participants' self-reported emphasis on DfAM [127], in addition to the short duration of the educational intervention. The lack of clear differences between the various levels in the scale could reduce the granularity of the responses. Future work will explore the development of a concrete scale for assessing participants' self-reported use of DfAM as well as the use of objective metrics such as the ones used in [128].

6.3. Participants who received the design task with explicit objectives and constraints generated ideas with greater uniqueness

The third key finding from the study was that the choice of the design task influenced the uniqueness of the solutions generated by participants. Participants who received the wind turbine

tower design task generated more unique solutions compared to those who received the cell phone holder design task. This result suggests that including explicit objectives and constraints in the design task encourages better exploration of the solution space, with participants generating a diverse set of solutions. This result supports previous findings, where a moderate set of constraints have been shown to correlate with greater creative production [82]. The participants could possibly be employing the various opportunistic DfAM concepts to find innovative techniques to improve the functionality of their solutions, as well as meet the requirements of the design task.

This inference also relates to the observed higher self-reported emphasis on *part consolidation* and *free complexity* by participants who received the wind turbine tower design task. In order to meet the constraints and requirements of the wind turbine tower design task, the participants incorporate complexities at the part and assembly levels, and these complexities manifest in different ways. For example, to fit the tower in the limited build volume, participants split their solutions into several components. These components were connected using a variety of assembly features such as T-slots and prismatic joints with and without locking features. On the other hand, given the ease with which the requirements of the cell phone holder task can be met, participants tend to generate single component designs, with similar primitive geometrical features. This result, thus, further supports the findings of the previous research question, suggesting the greater potential of a design task with explicit constraints and objectives in encouraging the generation of unique designs, possible through leveraging the capabilities of AM.

Despite this statistically significant result, future research must explore the *source* of the greater uniqueness of ideas generated by participants who received the wind turbine tower design task, potentially through a feature analysis. This would not only help reinforce the inferences made in this discussion, but also identify specific relationships between participants' use of the various DfAM concepts and the creativity of their designs. A feature analysis would also help highlight

any relationships between the functional context of the design task and the use of DfAM as discussed in Sections 6.1 and 6.2.

7. CONCLUSION, LIMITATIONS, AND FUTURE WORK

The aim of this research is to explore the effect of design task choice on the creativity of designers' AM design outcomes and investigating the role of DfAM in bringing about these effects. The study compared the use of two design tasks which differed in terms of the explicit inclusion of design objectives and constraints in defining them. The results showed that the choice of the design task affects the change in participants' DfAM self-efficacy as well as their self-reported use of DfAM in the design challenge. Both, design tasks encouraged the use of specific DfAM concepts, suggesting the use of a combination of design tasks to effectively teach different DfAM concepts. Further, the results also show that participants who received the design task with explicit objectives and constraints generated more unique ideas. This could be attributed to the participants' use of the different DfAM concepts to achieve the constraints and objectives of the design task. Based on these results, AM educators are recommended to use a combination of design tasks that vary in their explicit inclusion of objectives and constraints. This would result in better student engagement in applying the different DfAM concepts thus resulting in effective learning.

While the present research provides insights into the role of the choice of problem statements in a problem-based DfAM intervention, it has several limitations. First, the design tasks used in the study are not analogous to each other in terms of their working principle and functional context. Therefore, future research must use analogically near problem tasks (for example, a marshmallow tower [129] and a wind turbine tower) to eliminate any possible influence due to differences outside of task constraints and objectives. Further, the design challenge gives participants from both semesters the same time despite differences in task complexities. Future work should explore how the length of the design task, and the intervention as a whole, could affect

the design outcomes. Second, the study was conducted with mechanical engineering students in their junior and senior years. These students have a relatively higher level of engineering experience compared to freshmen and sophomores. Since previous experience has shown to influence learning, especially in the context of DfAM education [114], future research must explore the effects of design task choice on students with different levels of engineering experience. Third, the study relies on the participants' self-reported scores as an indicator of DfAM integration in their design outcomes, and these levels of emphasis might not fully manifest in their designs. This is particularly important in light of previous research where students have been observed to present wide variations – both over- and under-estimations – when self-assessing their performance [130]. Therefore, future research must employ objective metrics (such as [128]) to not only assess the participants' design outcomes for their use of DfAM but also explore the manifestation of the different DfAM concepts, potentially through an analysis of the features of the designs. Fourth, the design task narrows down participants' choice of the manufacturing process to AM only. Future research must explore the use of a process-agnostic design task and the effect of DfAM education on participants' choice of a design process. Finally, the study only compares restrictive and dual DfAM and future research will explore the effect of teaching only opportunistic DfAM. Further, future research will also explore the effect of inverting the order of lectures for the dual DfAM group (opportunistic followed by restrictive) on students' learning and design outcomes.

8. ACKNOWLEDGEMENT

We would also like to thank Dr. Stephanie Cutler for her guidance and advice. We would like to acknowledge the help of Dr. Jason Moore, Dr. Joseph Bartolai, the ME 340 TAs, and members of the Brite Lab and Made by Design Lab for helping conduct the experiment.

9. FUNDING

This research was supported by the National Science Foundation (NSF) under Grant No. CMMI-1712234. Any opinions, findings, and conclusions expressed in this paper are those of the authors and do not necessarily reflect the views of the NSF.

NOMENCLATURE

AM	Additive Manufacturing
DFMA	Design for Manufacturing and Assembly
DfAM	Design for Additive Manufacturing
CAT	Consensual Assessment Technique
ANOVA	Analysis of Variance
NSF	National Science Foundation

REFERENCES

- [1] Manyika, J., Chui, M., Bughin, J., Dobbs, R., Bisson, P., and Marrs, 2013, “Disruptive Technologies: Advances That Will Transform Life, Business, and the Global Economy,” McKinsey Global Institute, (May), p. 163.
- [2] Glass, R. L., Hague, R., Campbell, I., and Dickens, P., 2003, “Implications on Design of Rapid Manufacturing,” Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science, **217**(1), pp. 25–30.
- [3] Thomas-Seale, L. E. J., Kirkman-Brown, J. C., Attallah, M. M., Espino, D. M., and Shepherd, D. E. T., 2018, “The Barriers to the Progression of Additive Manufacture:

- Perspectives from UK Industry,” *International Journal of Production Economics*, **198**(February 2017), pp. 104–118.
- [4] Simpson, T. W., Williams, C. B., and Hripko, M., 2017, “Preparing Industry for Additive Manufacturing and Its Applications: Summary & Recommendations from a National Science Foundation Workshop,” *Additive Manufacturing*, **13**, pp. 166–178.
- [5] Gibson, I., Rosen, D., and Stucker, B., 2015, *Additive Manufacturing Technologies*.
- [6] Klahn, C., Leutenecker, B., and Meboldt, M., 2015, “Design Strategies for the Process of Additive Manufacturing,” *Procedia CIRP*, **36**, pp. 230–235.
- [7] Columbus, L., 2014, “Demand for 3D Printing Skills Is Accelerating Globally.”
- [8] Bourell, D. L. (The U. of T. at A.), Leu, M. C. (Missouri U. of S. and T.), and Rosen, D. W. (Georgia I. of T.), 2009, “Identifying the Future of Freeform Processing,” *Rapid Prototyping Journal*, p. 92.
- [9] Williams, C. B., Simpson, T. W., and Michael, H., 2015, “Advancing the Additive Manufacturing Workforce: Summary and Recommendations from a NSF Workshop,” *Proceedings of the ASME 2015 International Design Engineering Technical Conferences & Computers and Information in Engineering Conference*, pp. 1–11.
- [10] Prabhu, R., Miller, S. R., Simpson, T. W., and Meisel, N. A., 2018, “Teaching Design Freedom: Exploring the Effects of Design for Additive Manufacturing Education on the Cognitive Components of Students’ Creativity,” *Proceedings of the ASME 2018 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*, pp. 1–14.

- [11] Kumke, M., Watschke, H., Hartogh, P., Bavendiek, A. K., and Vietor, T., 2017, “Methods and Tools for Identifying and Leveraging Additive Manufacturing Design Potentials,” *International Journal on Interactive Design and Manufacturing*, pp. 1–13.
- [12] Vayre, B., Vignat, F., and Villeneuve, F., 2012, “Designing for Additive Manufacturing,” *Procedia CIRP*, **3**(1), pp. 632–637.
- [13] Pallari, J. H. P., Dalgarno, K. W., and Woodburn, J., 2010, “Mass Customization of Foot Orthoses for Rheumatoid Arthritis Using Selective Laser Sintering,” *IEEE Transactions on Biomedical Engineering*, **57**(7), pp. 1750–1756.
- [14] Schmelzle, J., Kline, E. V., Dickman, C. J., Reutzel, E. W., Jones, G., and Simpson, T. W., 2015, “(Re)Designing for Part Consolidation: Understanding the Challenges of Metal Additive Manufacturing,” *Journal of Mechanical Design*, **137**(11), p. 111404.
- [15] Calì, J., Calian, D. A., Amati, C., Kleinberger, R., Steed, A., Kautz, J., and Weyrich, T., 2012, “3D-Printing of Non-Assembly, Articulated Models,” *ACM Transactions on Graphics*, **31**(6), p. 1.
- [16] Chu, C., Graf, G., and Rosen, D. W., 2008, “Design for Additive Manufacturing of Cellular Structures,” *Computer-Aided Design and Applications*, **5**(5), pp. 686–696.
- [17] Rosen, D. W., 2007, “Computer-Aided Design for Additive Manufacturing of Cellular Structures,” *Computer-Aided Design and Applications*, **4**(1–6), pp. 585–594.
- [18] Murr, L. E., Gaytan, S. M., Medina, F., Lopez, H., Martinez, E., MacHado, B. I., Hernandez, D. H., Martinez, L., Lopez, M. I., Wicker, R. B., and Bracke, J., 2010, “Next-Generation Biomedical Implants Using Additive Manufacturing of Complex Cellular and Functional

- Mesh Arrays,” *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, **368**(1917), pp. 1999–2032.
- [19] De Laurentis, K. J., Kong, F. F., and Mavroidis, C., 2002, “Procedure for Rapid Fabrication of Non-Assembly Mechanisms with Embedded Components,” *Proceedings of the 2002 ASME Design Engineering Technical Conferences and Computers and Information in Engineering Conference*, pp. 1–7.
- [20] Kaweesa, D. V., Spillane, D. R., and Meisel, N. A., 2017, “Investigating the Impact of Functionally Graded Materials on Fatigue Life of Material Jetted Specimens,” *Solid Freeform Fabrication Symposium*, pp. 578–592.
- [21] Hu, K., Jin, S., and Wang, C. C. L., 2015, “Support Slimming for Single Material Based Additive Manufacturing,” *CAD Computer Aided Design*, **65**, pp. 1–10.
- [22] Zhu, Z., Dhokia, V., Nassehi, A., and Newman, S. T., 2016, “Investigation of Part Distortions as a Result of Hybrid Manufacturing,” *Robotics and Computer-Integrated Manufacturing*, **37**, pp. 23–32.
- [23] Carroll, B. E., Palmer, T. A., and Beese, A. M., 2015, “Anisotropic Tensile Behavior of Ti-6Al-4V Components Fabricated with Directed Energy Deposition Additive Manufacturing,” *Acta Materialia*, **87**, pp. 309–320.
- [24] Ahn, S., Montero, M., Odell, D., Roundy, S., and Wright, P. K., 2002, “Anisotropic Material Properties of Fused Deposition Modeling ABS,” *Rapid Prototyping Journal*, **8**(4), pp. 248–257.
- [25] Boschetto, A., and Bottini, L., 2016, “Design for Manufacturing of Surfaces to Improve

- Accuracy in Fused Deposition Modeling,” *Robotics and Computer-Integrated Manufacturing*, **37**, pp. 103–114.
- [26] Boschetto, A., Bottini, L., and Veniali, F., 2016, “Finishing of Fused Deposition Modeling Parts by CNC Machining,” *Robotics and Computer-Integrated Manufacturing*, **41**, pp. 92–101.
- [27] Fahad, M., and Hopkinson, N., 2012, “A New Benchmarking Part for Evaluating the Accuracy and Repeatability of Additive Manufacturing (AM) Processes,” 2nd International Conference on Mechanical, Production, and Automobile Engineering, pp. 234–238.
- [28] Prince, M. J., and Felder, R. M., 2006, “Inductive Teaching and Learning Methods: Definitions, Comparisons, and Research Bases,” *Journal of Engineering Education*, **95**(2), pp. 123–138.
- [29] Melsa, J. L., Rajala, S. a., Mohsen, J. P., Jamieson, L. H., Lohmann, J. R., Melsa, J. L., Rajala, S. a., and Mohsen, J. P., 2009, *Creating a Culture for Scholarly and Systematic Innovation in Engineering Education*.
- [30] Helge Böhn, J., 1997, “Integrating Rapid Prototyping into the Engineering Curriculum - a Case Study,” *Rapid Prototyping Journal*, **3**(1), pp. 32–37.
- [31] Jonassen, D. H., 2000, “Toward a Design Theory of Problem Solving,” **48**(4), pp. 63–85.
- [32] White, H., 2001, “Getting Started in Problem-Based Learning,” *The power of problem-based learning*, pp. 69–78.
- [33] Weiss, R. E., 2003, “Designing Problems to Promote Higher-Order Thinking,” *New Directions for Teaching and Learning*, **2003**(95), pp. 25–31.

- [34] Gagné, R. M., 1980, “Learnable Aspects of Problem Solving,” *Educational Psychologist*, **15**(2), pp. 84–92.
- [35] National Academy of Engineering, 2017, “National Academy of Engineering Grand Challenges For Engineers,” pp. 19–22.
- [36] National Academy of Sciences, National Academy of Engineering, and Institute of Medicine, 2007, *Rising Above the Gathering Storm: Energizing and Employing America for a Brighter Economic Future*, National Academies Press.
- [37] National Science Board, 2003, *The Science and Engineering Workforce: Realizing America’s Potential*.
- [38] National Academy of Engineering, 2005, *Educating the Engineer of 2020: Adapting Engineering Education to the New Century*, National Academies Press.
- [39] National Academy of Engineering, 2004, *The Engineer of 2020: Visions of Engineering in the New Century*, The National Academies Press, Washington, DC.
- [40] Grasso, D., and Burkins, M. B., 2010, *Holistic Engineering Education: Beyond Technology*.
- [41] Barrett, C. R., 2006, *Reforming Engineering Education*, National Academy of Engineering.
- [42] Melsa, J. L., Rajala, S. a., Mohsen, J. P., Jamieson, L. H., Lohmann, J. R., Melsa, J. L., Rajala, S. a., and Mohsen, J. P., 2009, “Creating a Culture for Scholarly and Systematic Innovation in Engineering Education,” *Journal of Engineering Education*, **98**(3), pp. 209–209.
- [43] Mayer, R. E., 1992, “Thinking, Problem Solving, Cognition .”

- [44] Mayer, R. E., and Wittrock, M. C., 1996, "Problem-Solving Transfer," Handbook of educational psychology, pp. 47–62.
- [45] Bransford, J. D., Brown, A. L., and Cocking, R. R., 1999, "Learning and Transfer," (1913), pp. 39–66.
- [46] Detterman, D. K., and Sternberg, R. J., 1993, *Transfer on Trial: Intelligence, Cognition, and Instruction.*, Ablex Publishing.
- [47] McKeough, A., Lupart, J. L., and Marini, A., 2013, *Teaching for Transfer: Fostering Generalization in Learning*, Routledge.
- [48] Mayer, R. E., 1995, "Teaching and Testing for Problem Solving," International encyclopedia of teaching and teacher education, **2**, pp. 4728–4731.
- [49] Haskell, R. E., 2000, *Transfer of Learning: Cognition and Instruction*, Elsevier.
- [50] Mayer, R. E., 2002, "Rote Versus Meaningful Learning," Theory Into Practice, **41**(4), pp. 226–232.
- [51] Mayer, R. E., 2001, "Changing Conceptions of Learning: A Century of Progress in the Scientific Study of Education," YEARBOOK-NATIONAL SOCIETY FOR THE STUDY OF EDUCATION, **1**, pp. 34–75.
- [52] Bloom, B. S., 1966, "Taxonomy of Educational Objectives: The Classification of Educational Goals ."
- [53] Felder, R., and Prince, M., 2007, "The Case for Inductive Teaching," Prism, **17**(2), p. 55.
- [54] Biggs, J., 1996, "Enhancing Teaching through Constructive Alignment," Higher Education,

32(347), pp. 347–364.

- [55] Bateman, W. L., 1990, *Open to Question. The Art of Teaching and Learning by Inquiry.*, ERIC.
- [56] Lee, V. S., 2004, *Teaching and Learning through Inquiry: A Guidebook for Institutions and Instructors*, Stylus Pub Llc.
- [57] Smith, D. A., 1997, “A Meta-Analysis of Student Outcomes Attributable to the Teaching of Science as Inquiry as Compared to Traditional Methodology.”
- [58] Wilcox, J., Kruse, J. W., and Clough, M. P., 2015, “Teaching Science Through Inquiry,” *The Science Teacher*, pp. 62–68.
- [59] Shymansky, J. A., Hedges, L. V., and Woodworth, G., 1990, “A Reassessment of the Effects of Inquiry-based Science Curricula of the 60’s on Student Performance,” *Journal of Research in Science Teaching*, **27**(2), pp. 127–144.
- [60] Barrows, H. S., Tamblyn, R. M., and others, 1980, *Problem-Based Learning: An Approach to Medical Education*, Springer Publishing Company.
- [61] Boud, D., and Feletti, G., 2013, *The Challenge of Problem-Based Learning*, Routledge.
- [62] Norman, G. R., and Schmidt, H. G., 1992, “The Psychological Basis of Problem-Based Learning: A Review of the Evidence,” *Academic Medicine*, **67**(9).
- [63] Dahlgren, M. A., 2003, “PBL through the Looking-Glass: Comparing Applications in Computer Engineering , Psychology and Physiotherapy,” *International Journal of Engineering Education*, **19**(5), pp. 672–681.

- [64] Duch, B. J., Groh, S. E., and Allen, D. E., 2001, *The Power of Problem-Based Learning: A Practical "How to" for Teaching Undergraduate Courses in Any Discipline*, Stylus Publishing, LLC.
- [65] Mills, J. E., and Treagust, D. F., "ENGINEERING EDUCATION – IS PROBLEM- BASED OR PROJECT-BASED LEARNING THE ANSWER?," *Australasian Journal of Engineering Education*, **9**(2), p. 7062.
- [66] Heitmann, G., 1996, "Project-Oriented Study and Project-Organized Curricula: A Brief Review of Intentions and Solutions," *European Journal of Engineering Education*, **21**(2), pp. 121–131.
- [67] Thomas, J. W., 2000, *A Review of Research on Project-Based Learning*.
- [68] Lundeberg, M. A., Levin, B. B., and Harrington, H. L., 1999, *Who Learns What from Cases and How?: The Research Base for Teaching and Learning with Cases*, Routledge.
- [69] Adam, M., 1992, "The Responses of Eleventh Graders to Use of Case Method of Instruction in Social Studies," Simon Fraser University.
- [70] Novak, G. M., Gavrini, A., Christian, W., and Patterson, E., "Just-in-Time Teaching: Blending Active Learning with Web Technology. 1999," Google Scholar.
- [71] Leonard, W. H., 1989, "An Experimental Test of an Extended Discretion Laboratory Approach for University General Biology," *Journal of Research in Science Teaching*, **26**(1), pp. 79–91.
- [72] Singer, R. N., and Pease, D., 1978, "Effect of Guided Vs. Discovery Learning Strategies on Initial Motor Task Learning, Transfer, and Retention," *Research Quarterly. American*

Alliance for Health, Physical Education and Recreation, **49**(2), pp. 206–217.

- [73] Davison, R., 2010, *Engineering Curricula: Understanding the Design Space and Exploiting the Opportunities: Summary of a Workshop*.
- [74] Hmelo-Silver, C. E., 2004, “Problem-Based Learning: What and How Do Students Learn?,” *Educational Psychology Review*, **16**(3), pp. 235–266.
- [75] Blumenfeld, P. C., Soloway, E., Marx, R. W., Krajcik, J. S., Guzdial, M., and Palincsar, A., 1991, “Motivating Project-Based Learning: Sustaining the Doing, Supporting the Learning,” *Educational Psychologist*, **26**(3–4), pp. 369–398.
- [76] Wood, P. K., 1983, “Inquiring Systems and Problem Structure: Implications for Cognitive Development,” *Human Development*, **26**, pp. 249–265.
- [77] Sweller, J., 1988, “Cognitive Load during Problem Solving: Effects on Learning,” *Cognitive Science: A Multidisciplinary Journal*, **12**(2), pp. 257–285.
- [78] Jonassen, D. H., 1997, “Instructional Design Models for Well-Structured and Ill-Structured Problem-Solving Learning Outcomes,” *Educational Technology Research and Development*, **45**(1), pp. 65–94.
- [79] Voss, J. F., 1987, “Learning and Transfer in Subject-Matter Learning: A Problem Solving Model,” *International Journal of Educational Research*, **11**, pp. 607–622.
- [80] Delisle, R., 1997, *How to Use Problem-Based Learning in the Classroom*, Ascd.
- [81] Duch, B. J., 2001, “Writing Problems for Deeper Understanding,” *The power of problem-based learning*, pp. 47–58.

- [82] Joyce, C. K., 2009, "The Blank Page: Effects of Constraint on Creativity," University of California, Berkley.
- [83] Stokes, P. D., 2008, "Creativity from Constraints. What Can We Learn from Motherwell? From Mondrian? From Klee?," *Journal of Creative Behavior*, **42**(4), pp. 223–236.
- [84] Stokes, P. D., and Fisher, D., 2005, "Selection, Constraints, and Creativity Case Studies: Max Beckmann and Philip Guston," *Creativity Research Journal*, **17**(2–3), pp. 283–291.
- [85] Ward, T. B., Patterson, M. J., and Sifonis, Cynthia, M., 2004, "The Role of Specificity and Abstraction in Creative Idea Generation," *Creativity Research Journal*, **16**(1), pp. 1–9.
- [86] Ward, T. B., 1994, "Structured Imagination: The Role of Category Structure in Exemplar Generation," *Cognitive Psychology*, **27**(1), pp. 1–40.
- [87] Jansson, D. G., and Smith, S. M., 1991, "Design Fixation," *Design Studies*, **12**(1), pp. 3–11.
- [88] Crilly, N., 2015, "Fixation and Creativity in Concept Development: The Attitudes and Practices of Expert Designers," *Design Studies*, **38**, pp. 54–91.
- [89] Williams, C. B., and Seepersad, C. C., 2012, "Design for Additive Manufacturing Curriculum: A Problem-and Project-Based Approach," *International Solid Freeform Fabrication Symposium*, pp. 81–92.
- [90] Williams, C. B., Sturm, L., and Wicks, A., 2015, "Advancing Student Learning Of Design for Additive Manufacturing Principles Through An Extracurricular Vehicle Design Competition," *Proceedings of the ASME 2015 International Design Engineering Technical Conferences & Computers and Information in Engineering Conference*, pp. 1–8.

- [91] Diegel, O., Nordin, A., and Motte, D., 2019, “Teaching Design for Additive Manufacturing Through Problem-Based Learning,” *Additive Manufacturing—Developments in Training and Education*, Springer International Publishing AG, pp. 139–149.
- [92] Richter, T., Schumacher, F., Watschke, H., and Vietor, T., 2018, “Exploitation of Potentials of Additive Manufacturing in Ideation Workshops,” *The Fifth International Conference on Design Creativity (ICDC2018)*, (February), pp. 1–8.
- [93] Meisel, N. A., and Williams, C. B., 2015, “Design and Assessment of a 3D Printing Vending Machine,” *Rapid Prototyping Journal*, **21**(5), pp. 471–481.
- [94] “Submitting Your 3D Print | Maker Commons” [Online]. Available: <https://makercommons.psu.edu/submitting-your-3d-print/>. [Accessed: 12-Feb-2018].
- [95] Forest, C. R., Moore, R. A., Jariwala, A. S., Fasse, B. B., Linsey, J., Newstetter, W., Ngo, P., and Quintero, C., 2014, “The Invention Studio: A University Maker Space and Culture,” *Advances in Engineering Education*, **4**(2), pp. 1–32.
- [96] Sinha, S., Rieger, K., Knochel, A. D., and Meisel, N. A., 2017, “Design and Preliminary Evaluation of a Deployable Mobile Makerspace for Informal Additive Manufacturing Education,” pp. 2801–2815.
- [97] “3D Printing Services | Case School of Engineering” [Online]. Available: <http://engineering.case.edu/sears-thinkbox/use/3d-printing-services>. [Accessed: 28-Jan-2019].
- [98] “3D Printing Service - MIT Project Manus” [Online]. Available: <https://project-manus.mit.edu/3d-printing-service>. [Accessed: 28-Jan-2019].

- [99] Booth, J. W., Alperovich, J., Chavla, P., Ma, J., Reid, T. N., and Ramani, K., 2017, “The Design for Additive Manufacturing Worksheet,” *Journal of Mechanical Design*, **139**(October 2017).
- [100] Bloesch-Paidosh, A., and Shea, K., 2018, “Design Heuristics for Additive Manufacturing Validated Through a User Study,” *Journal of Mechanical Design*, (c), pp. 1–40.
- [101] Sheng, I. L. S., and Kok-Soo, T., 2010, “Eco-Efficient Product Design Using Theory of Inventive Problem Solving (Triz) Principles,” *American Journal of Applied Sciences*, **7**(6), pp. 852–858.
- [102] Gross, J., Park, K., and Kremer, G. E. O., 2018, “Design for Additive Manufacturing Inspired by TRIZ,” *Proceedings of the ASME 2018 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*, pp. 1–10.
- [103] Jonassen, D. H., 2000, “Toward a Design Theory of Problem Solving,” *Educational Technology Research and Development*, **48**(4), pp. 63–85.
- [104] “Design Thinking – Made By Design Lab” [Online]. Available: <http://sites.psu.edu/madebydesign/design-thinking/>. [Accessed: 24-Apr-2019].
- [105] Amabile, T. M., 1996, *Creativity in Context: Update to the Social Psychology of Creativity*, Westview Press.
- [106] Sinha, S., Chen, H.-E., Meisel, N. A., and Miller, S. R., 2017, “DOES DESIGNING FOR ADDITIVE MANUFACTURING HELP US BE MORE CREATIVE? AN EXPLORATION IN ENGINEERING DESIGN EDUCATION,” *Proceedings of the ASME*

2017 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference, pp. 1–12.

- [107] Goldschmidt, G., and Rodgers, P. A., 2013, “The Design Thinking Approaches of Three Different Groups of Designers Based on Self-Reports,” *Design Studies*, **34**(4), pp. 454–471.
- [108] Bandura, A., 1977, “Self-Efficacy: Toward a Unifying Theory of Behavioral Change,” *Psychological Review*; Stanford University, **Vol. 84**(No. 2), pp. 191–215.
- [109] Carberry, A. R., Lee, H.-S., and Ohland, M. W., 2010, “Measuring Engineering Design Self-Efficacy,” *Journal of Engineering Education*, **99**, pp. 71–79.
- [110] Quade, A., 2003, “Development and Validation of a Computer Science Self-Efficacy Scale for CS0 Courses and the Group Analysis of CS0 Student Self-Efficacy,” *Proceedings ITCC 2003, International Conference on Information Technology: Computers and Communications*, pp. 60–64.
- [111] Compeau, D. R., and Higgins, C. A., 2016, “Computer Self-Efficacy : Development of a Measure and Initial Test,” **19**(2), pp. 189–211.
- [112] Lee, C., 1982, “Self-Efficacy as a Predictor of Performance in Competitive Gymnastics,” *Journal of Sport Psychology*, (4), pp. 405–409.
- [113] Barling, J., and Abel, M., 1983, “Self-Efficacy Beliefs and Tennis Performance,” *Cognitive Therapy and Research*, **7**(3), pp. 265–272.
- [114] Prabhu, R., Miller, S. R., Simpson, T. W., and Meisel, N. A., 2018, “The Earlier the Better? Investigating the Importance of Timing on Effectiveness of Design for Additive Manufacturing Education,” *Proceedings of the ASME 2018 International Design*

Engineering Technical Conferences and Computers and Information in Engineering Conference, pp. 1–14.

- [115] Cronbach, L. J., 1951, “Coefficient Alpha and the Internal Structure of Tests,” *Psychometrika*, **16**(3), pp. 297–334.
- [116] Hennessey, B. A., 1994, “The Consensual Assessment Technique: An Examination of the Relationship between Ratings of Product and Process Creativity,” *Creativity Research Journal*, **7**(2), pp. 193–208.
- [117] Baer, J., and McKool, S. S., 2016, “Assessing Creativity Using the Consensual Assessment Technique,” *Handbook of Research on Assessment Technologies, Methods, and Applications in Higher Education*, (January 2009), pp. 65–77.
- [118] Kaufman, J. C., and Baer, J., 2012, “Beyond New and Appropriate: Who Decides What Is Creative?,” *Creativity Research Journal*, **24**(1), pp. 83–91.
- [119] Kaufman, J. C., Baer, J., Cropley, D. H., Reiter-Palmon, R., and Sinnett, S., 2013, “Furious Activity vs. Understanding: How Much Expertise Is Needed to Evaluate Creative Work?,” *Psychology of Aesthetics, Creativity, and the Arts*, **7**(4), pp. 332–340.
- [120] Shrout, P. E., and Fleiss, J. L., 1979, “Intraclass Correlations: Uses in Assessing Rater Reliability,” *Psychological Bulletin*, **86**(2), pp. 420–428.
- [121] Besemer, S. P., 1998, “Creative Product Analysis Matrix: Testing the Model Structure and a Comparison Among Products-Three Novel Chairs,” *Creativity Research Journal*, **11**(4), pp. 333–346.
- [122] Besemer, S. P., and O’Quin, K., 1999, “Confirming the Three-Factor Creative Product

- Analysis Matrix Model in an American Sample,” *Creativity Research Journal*, **12**(4), pp. 329–337.
- [123] Shapiro, A. S. S., and Wilk, M. B., 1965, “An Analysis of Variance Test for Normality (Complete Samples),” *Biometrika*, **52**(3), pp. 591–611.
- [124] Bandura, A., and Schunk, D. H., 1981, “Cultivating Competence, Self-Efficacy, and Intrinsic Interest through Proximal Self-Motivation,” *Journal of Personality and Social Psychology*, **41**(3), pp. 586–598.
- [125] Onarheim, B., 2012, “Creativity from Constraints in Engineering Design: Lessons Learned at Coloplast,” *Journal of Engineering Design*, **23**(4), pp. 323–336.
- [126] Prabhu, R., Miller, S. R., Simpson, T. W., and Meisel, N. A., 2019, “Exploring the Effects of Additive Manufacturing Education on Students’ Engineering Design Process and Its Outcomes,” *Journal of Mechanical Design*, p. 1.
- [127] Jamieson, S., 2004, “Likert Scales: How to (Ab)Use Them,” *Medical Education*, **38**(12), pp. 1217–1218.
- [128] Prabhu, R., Simpson, T. W., Miller, S. R., and Meisel, N. A., 2019, “But Will It Print? Assessing Student Use of Design for Additive Manufacturing and Exploring Its Effect on Design Performance and Manufacturability,” *Proceedings of the ASME 2019 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference*, Anaheim CA, pp. 1–14.
- [129] Barclift, M., Simpson, T. W., Nusiner, M. A., and Miller, S., 2017, “An Investigation Into the Driving Factors of Creativity IN DESIGN FOR ADDITIVE MANUFACTURING,”

Proceedings of the ASME 2017 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference, pp. 1–14.

- [130] Boud, D., and Falchikov, N., 1989, “Quantitative Studies of Student Self-Assessment in Higher Education: A Critical Analysis of Findings,” *Higher Education*, **18**(5), pp. 529–549.

Figure Captions List

Fig. 1	Distribution of participants' previous experience
Fig. 2	Summary of the experimental procedure
Fig. 3	Examples of design outcomes from the design challenge with respective CAT scores
Fig. 4	Descriptive statistics for each metric (mean $\pm$ SD)

Table Captions List

Table 1	Distribution of participants between the two semesters
Table 2	Items from the DfAM self-efficacy survey (O: opportunistic, R: restrictive)
Table 3	Scale used for DfAM self-efficacy
Table 4	Scale used for measuring participants' self-reported emphasis on DfAM.
Table 5	Main Effects of Educational Intervention Group and Design Task Choice on Participants' DfAM Self-efficacy
Table 6	Main Effects of Educational Intervention Group and Design Task Choice on Participants' Self-reported Emphasis on DfAM
Table 7	Main Effects of Educational Intervention Group and Design Task Choice on the Creativity of Participants' Design Outcomes

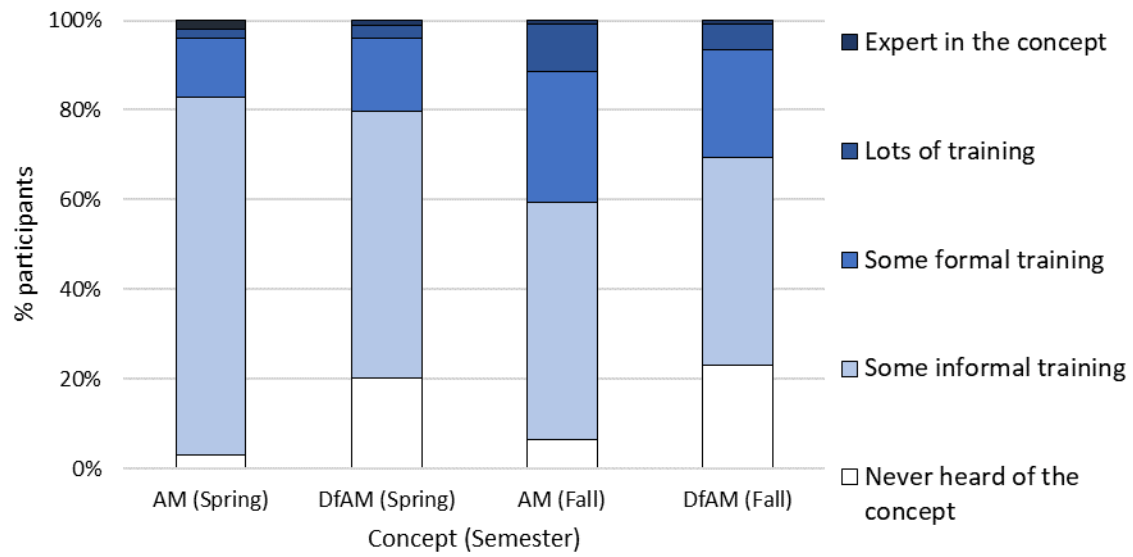


Figure 1 Distribution of participants' previous experience

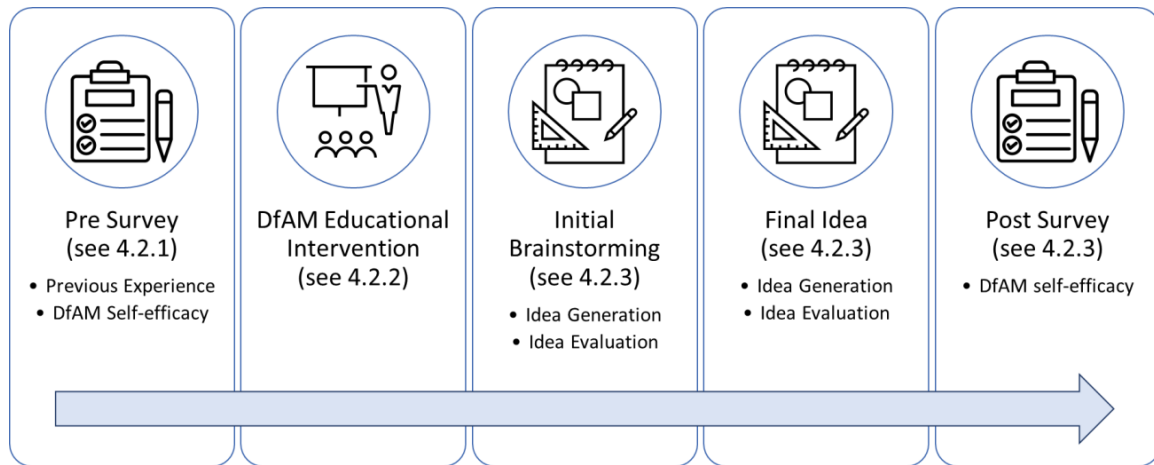


Figure 2 Summary of the experimental procedure

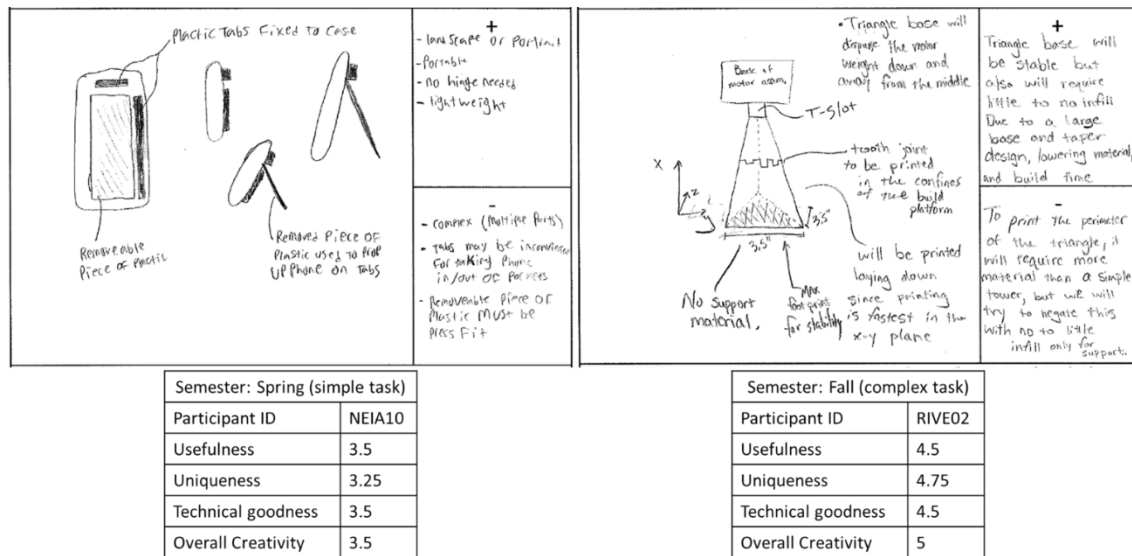


Figure 3 Examples of design outcomes from the design challenge with respective CAT scores

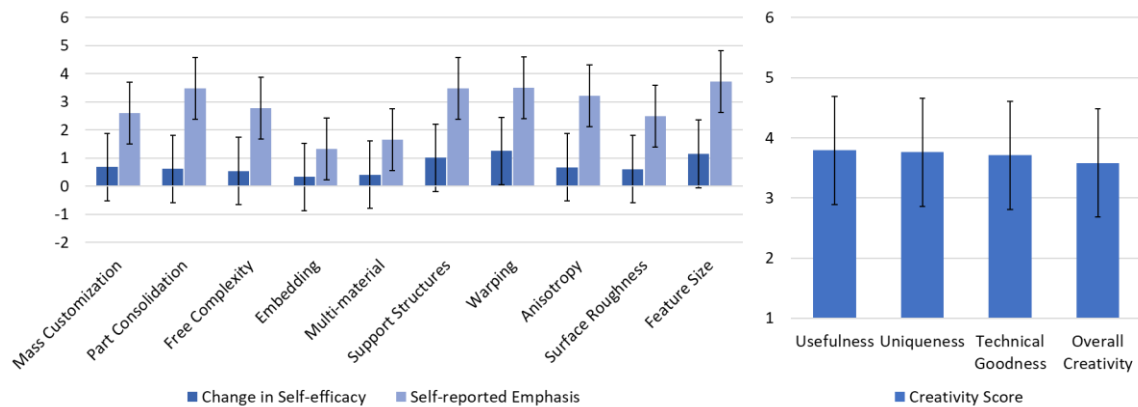


Figure 4 Descriptive statistics for each metric