

A Taxonomy of Team-Assembly Systems: Understanding How People Use Technologies to Form Teams

DIEGO GÓMEZ-ZARÁ*, Northwestern University, USA

LESLIE A. DECHURCH, Northwestern University, USA

NOSHIR S. CONTRACTOR, Northwestern University, USA

The emergence of team-assembly technologies has brought with it new challenges in designing and implementing socio-technical systems. Our understanding of how systems shape the team-assembly processes is still limited. How do systems enable users to find teammates? How do users make decisions when using these systems? And what factors explain the characteristics of the teams assembled? Building on existing literature from CSCW, computer science, and management science, we propose a taxonomy to characterize how systems influence team assembly. This taxonomy argues that two dimensions determine how systems shape team assembly: (i) users' agency, to what extent the system enables its users to exercise their agency, and (ii) users' participation, how many users the system allows to participate in the team-formation process. The intersection of these two dimensions manifest four types of teams enabled by systems: self-assembled teams, staffed teams, optimized teams, and augmented teams. We characterize each one of these types of teams, considering their qualities, advantages, and challenges. To contextualize these types of teams, we map the current literature of team-assembly systems using a scoping literature review. Lastly, we discuss ways through which these two dimensions alter users' behavior, team diversity, and team composition. This paper provides theoretical implications and research questions for future systems that reconfigure the organization of people into teams.

CCS Concepts: • **Human-centered computing** → **Collaborative and social computing theory, concepts and paradigms**; *HCI theory, concepts and models*.

Additional Key Words and Phrases: team assembly, team formation, teams, conceptual framework, algorithms, diversity

ACM Reference Format:

Diego Gómez-Zarà, Leslie A. DeChurch, and Noshir S. Contractor. 2020. A Taxonomy of Team-Assembly Systems: Understanding How People Use Technologies to Form Teams. *Proc. ACM Hum.-Comput. Interact.* 4, CSCW2, Article 181 (October 2020), 36 pages. <https://doi.org/10.1145/3415252>

1 INTRODUCTION

Assembling a team is a challenging enterprise for managers, workers, teachers, students, players, and many others [15]. It requires iterating several possible team combinations, getting information about members' attributes and social relationships, and operating under the given conditions in a

*Also with Pontificia Universidad Católica de Chile, Facultad de Comunicaciones.

Authors' addresses: Diego Gómez-Zarà, dgomezara@u.northwestern.edu, Northwestern University, McCormick School of Engineering and School of Communication, Evanston, USA; Leslie A. DeChurch, dechurch@northwestern.edu, Northwestern University, School of Communication, Evanston, USA; Noshir S. Contractor, nosh@northwestern.edu, McCormick School of Engineering, Kellogg School of Management, and School of Communication, Northwestern University, Evanston, USA.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2020 Copyright held by the owner/author(s). Publication rights licensed to ACM.

2573-0142/2020/10-ART181 \$15.00

<https://doi.org/10.1145/3415252>

particular social context [15]. Furthermore, forming the most efficient team combinations from a pool of individuals is not always evident. For example: bringing together star-players or top experts will not necessarily imply a successful team [150, 215], forming a team from diverse students may lead to cultural conflicts and divisions [19], and finding the most appropriate teammates is not always possible because they may not be available at the same time [177]. Putting the issue of the best way to assemble teams aside, people are often not even aware of others' backgrounds and abilities. Gauging information about others' skills, values, points of view, or knowledge is difficult since those characteristics are intangible, and people often judge others based on stereotypes and demographics [41]. When people can choose their teammates, hardwired human tendencies create an attraction to people who are similar and familiar [86], leading to the formation of less diverse teams [203]. People must confront these multiple decisions, recognize the lack of opportunities to find suitable teammates, yet feel empowered to choose them freely, and learn more about potential teammates' repertoires (e.g., background, skills, information, experiences.) These problems are relevant for both people and organizations, since forming ineffective teams can have devastating consequences for its members (e.g., conflict, group faultlines, authoritarian leadership), for the entrusted task (e.g., failure, delays, extra-costs, lack of innovation, poor performance), and for stakeholders (e.g., reputation, expectations, value) [136, 137]. As modern work is increasingly carried out by teams, organizations and individuals must overcome these challenges to assemble effective teams.

Can socio-technical systems help people assemble effective teams? In the last three decades, computer science scholars have worked on different systems and methods that support the team-assembly task. As a result, different systems have been developed to leverage team-assembly processes by combining several data sources, analyzing users' trace data, and performing several calculations to find the most efficient team combinations. However, these contributions have not been synthesized and studied as a whole [82], and most technological solutions do not consider members' social contexts, which can make teams more efficient and viable [95]. In the light of the increasing number of technologies supporting teams, there is an opportunity to study how systems are helping people assemble teams. This pursuit can increase our understanding of how systems improve team formation by assembling efficient teams or suggesting suitable teammates, who might not have been considered in an offline context [69, 82].

From a theoretical standpoint, most conceptual frameworks in CSCW assume that groups are already assembled [75, 98, 121] and leave questions about team assembly unaddressed: What kinds of potential teammates would users like to seek? How would the team composition be shaped by using a particular team formation system? Should users know why they were assigned to a particular team? Should users be actively involved in the team-assembly process? Only a few studies have sufficiently accounted for the benefits and challenges of using socio-technical systems to assemble teams, and how users' contexts are translated into systems' components or designs for assembling teams. Most of this research corpus is based on case studies and does not provide theoretical conceptualizations for future innovations [82, 84, 158]. Although system designers, researchers, and developers can incorporate knowledge from previous CSCW frameworks, they would greatly benefit from a conceptual framework that integrates social considerations and knowledge from previous team assembly studies. In other words, CSCW scholarship needs to extend existing theoretical knowledge to incorporate the increasingly common practice of assembling teams using socio-technical systems. Therefore, we propose a conceptual framework to understand the role of systems in team assembly.

In this paper, we introduce a taxonomy that describes the impact of socio-technical systems on team assembly. Prior research shows that team assembly is driven in part by the number of individuals involved in forming a team, and their level of control over the formation process [15].

Therefore, the taxonomy we propose integrates two dimensions considering the role of systems: (1) *users' agency*: to what extent systems enable their users to exercise their agency during the team-assembly process, and (2) *users' participation*: how many users the system allows to participate in the team-assembly process. These two dimensions manifest four types of teams enabled by systems:

- *Self-assembled teams*, where systems enable users to self-organize in their own teams.
- *Staffed teams*, where a user customizes the team-assembly criteria used by the system to simulate and form teams.
- *Optimized teams*, where a system assembles teams given particular team-formation criteria, and,
- *Augmented teams*, where the system augments users' actions by suggesting potential team-mates.

After introducing this taxonomy, we conduct a scoping literature review [14] to examine the corpus, volume, and contributions of prior studies on systems that support team assembly. After screening more than 2,100 articles found on the ACM Digital Library, IEEE Xplore Digital Library, and Springer Link, we identified 126 relevant studies that describe systems, algorithms, and methods to assemble teams, and then we mapped them based on our taxonomy's dimensions. We used this exercise to identify future areas of research within this taxonomy, hoping that these results empower CSCW practitioners, designers, and researchers to systematically examine how socio-technical systems affect team assembly.

The contributions of this paper are twofold. First, we provide a taxonomy that sheds light on how socio-technical systems facilitate team assembly based on the interactions between systems and users. For designers and developers, this taxonomy illustrates key features and relevant design considerations to take into account in order to enhance users' experience. For researchers, this taxonomy suggests promising directions for empirical research and system experimentation. Second, we complete a scoping literature review to assess how the design of prior team-assembly systems has evolved based on users' agency and participation. By understanding the challenges of assembling teams using socio-technical systems, CSCW research will be able to develop and refine how systems support the formation of more effective teams, considering the dimensions that better satisfy the team's task and users' needs.

This paper is structured as follows: First, we begin by elaborating on our theoretical background to position systems that support team assembly in current CSCW frameworks. Next, we introduce this taxonomy of team-assembly systems, describe its conceptual dimensions, and elaborate on their intersections. We proceed with a systematic literature review to map prior studies of systems supporting team assembly. Finally, after explaining and categorizing the articles found, we end this article by discussing theoretical and design implications for designing and implementing these dimensions that configure team assembly in socio-technical systems.

2 THEORETICAL BACKGROUND

We situate our work in the context of prior studies of team assembly and CSCW frameworks across CSCW, HCI, and management science literature.

2.1 What is a team?

Teams are a set of two or more individuals interacting adaptively, interdependently, and dynamically toward a common and valued goal [175]. Teams are considered a specific subset of groups (i.e., work groups) since (i) team members are required to work interdependently with one another, (ii) teams require adaptation and structure to exchange information and resources, and (iii) teams have

limited life span during which team interaction must be promoted together to achieve specific goals [175]. Despite these differences, the terms “group” and “teams” have been used interchangeably in the literature [79, 115]. In addition, teams are brought together to perform organizationally relevant tasks and exhibit interdependencies with respect to workflow, goals, and outcomes. Team members have different roles and responsibilities, and are together embedded in an encompassing organizational system, with boundaries and linkages to the broader system’s context and task environment [115].

Since teams are increasingly relying on technologies to carry out their work, team processes and dynamics have adapted to the social architectures and interaction possibilities provided by socio-technical systems. CSCW research has explored how technologies facilitate teams’ communication, coordination, collaboration, and work [51, 67]. More recently, scholars have explored how technologies can help the formation of teams by taking advantage of the current computational infrastructure and the combination of users’ digital trace data and network information [82].

2.2 Team assembly

Team assembly refers to the process of searching for, identifying, and choosing members for a team [76, 199]. When assembling a machine, designers must look for, identify, choose, and gather the most appropriate pieces for the machine’s specific purpose. So too with team assembly. The process of assembling a team is understood as the deliberate combination of people to form an envisioned whole since different and almost infinite team combinations can take place in social settings. One of the most critical challenges is deciding *who* would be the most appropriate team members who could work together successfully in order to accomplish the team goal. Team builders must complete a multi-step process to assemble successful teams, including searching for, identifying, and choosing members.

Prior literature has emphasized the socio-technical aspects that should be considered in team assembly:

- Team’s structures [93] (e.g., norms, hierarchies, membership requirements).
- Team’s contextual constraints [15, 137] (e.g., maximum size, members’ locations, communication channels).
- Team’s task [136] (e.g., What kind of tasks would members perform? Would the members’ average or the best member’s result be considered?)
- Team members’ relationships [108, 170, 204] (e.g., Have they collaborated together in the past?)
- Team members’ personalities [204] (e.g., Are their personalities compatible?)
- Team members’ expertise [211] (e.g., Do members have the necessary skills to complete the task?, Do members complement each other with different skills?).
- Team members’ diversity [90] (e.g., Do members provide different points of view? How is the gender balance in the team? Is there a diversity of languages, cultures, and ethnicities?).
- Leadership structures [27, 163, 228] (e.g., Are there members who can lead and coordinate? Can team members manage themselves without outside leadership?).
- Members’ identification with the group [201] (e.g., Do members see themselves as part of the team? Are members committed to the team’s task?).
- Membership boundaries [137] (e.g., Do teams have open or closed boundaries to membership? What are the requirements to be part of the team?).

The combination of these factors—and how team assemblers prioritize them—will ultimately determine which members will be part of a team. Thus, understanding the factors and the mechanisms that support team assembly help us (i) trace the decisions that led to the team’s ultimate

composition, (ii) identify team assemblers' bias while searching for, identifying, and choosing members, (iii) and analyze how team members' characteristics and relationships might influence future team processes (e.g., cohesion, performance).

Past research has defined team assembly as the initial phases of the team members getting to know one another, their task, and their environment, but it does not address how team members are chosen. The research on teams has focused almost exclusively on what makes teams more or less effective *after* they formed. The focus of this paper, by contrast, is focused on the theoretical framework that explains the formation of the team. As such, this paper's theoretical focus ends where most prior theoretical research on team processes and outcomes begins. In the 1960s, Tuckman [196]—in a four-step model to explain team development—defines *team formation* as the initial stage that anticipates a team's actions. From this perspective, assembling a team is understood as an initial phase of building a team: members must know each other, understand the tasks, goals, and adapt to their environment. However, in this model, the team is already assembled, and its composition is already given. Tuckman's notion of team building was focused on building relationships among team members who were already assembled. It was not referencing the building of a team in terms of assembling the team.

One of the benefits of assembling teams is allowing individuals to achieve goals collectively, beyond the scope of what could be achieved by any of the individual members. Collins and Guetzkow defined this group quality as the "assembly effect" [40]. In Hackman and Katz's chapter [79] on the history of group research, the authors discuss how this effect should be considered by examining individuals' attributes and their social relationships when they come together as a team. Moreland et al. [146] described this situation as studying the "chemistry" that members develop when they work in a group. However, no empirical measures are provided to assess these interactions among members. In this sense, the challenge is examining how members' attributes will affect team processes once they finalize their team membership. Additionally, Hackman and Katz cautioned that aggregating individuals' attributes would not predict the team's ultimate characteristics, since new characteristics can emerge as a product of team members' interactions (e.g., a team of students in which some of them learn from others). They provided some guidelines to consider when assembling teams: (i) the task to be accomplished and required expertise, (ii) the use of members' information and knowledge, (iii) how members will share their expertise (and therefore, build teams' transactive memory and shared mental models), (iv) training activities that increase stability in the team, (v) the social systems that members are situated in (e.g., norms, hierarchies, status), (vi) and the presence and exercise of leadership. Although the studies reviewed by Hackman and Katz do not consider the role of technologies, these authors recognized the benefits of using technologies to coordinate teams' activities and characteristics.

A separate stream of research explores team assembly as a socio-cognitive process in which individuals situate their place in a social structure by identifying themselves within specific groups. One such theory, the *social-categorization* theory [88, 197, 198] posits that individuals categorize themselves into groups according to specific shared attributes. Two examples are a football team sharing the same uniform and software developers contributing to the same repository. As a result, team members develop attitudes of belonging to specific groups (i.e., ingroups) and establish boundaries that separate them from others who do not share those attributes (i.e., outgroups). Here again, this theory considers teams that are already assembled, and whose members feel a sense of group identity. A second theory is the *similarity/attraction* paradigm [25], which posits that people look for those who are similar or familiar to them. In contrast to the prior theory, a team does not innately exist, but rather, members assemble themselves into teams according to their similarities [28]. Individuals will form a group if they share interests or characteristics, and newcomers can join if their current members feel they are compatible.

In their book, Arrow, McGrath, and Berdahl [15] described four foci that characterize team assembly: member selection can be driven by *external* forces or *internal* forces, and it can be *planned* by agents or *emerge* spontaneously in social settings. Given the combination of these four forces, the authors introduce four team assembly strategies: (i) *Concocted teams*, where external agents deliberately form new groups (e.g., ad-hoc teams); (ii) *Founded teams*, where one or more members of the team may deliberately assemble a new group by linking up with other individuals (e.g., inviting a new partner in a start-up); (iii) *Self-organized groups*, where people form teams from local interactions pursuing their individual agendas (e.g., a research team); and (iv) *Circumstantial groups*, where environmental circumstances dictate both the project and the membership of the team (e.g., a flight crew assembled according to members' availability and schedule). These four strategies of team assembly advance our understanding of how the environment and individual agency impact team formation. However, teams examined in this model were assembled in offline circumstances. Though technology can be seen as an external force, it is not clear whether or not technology would be considered part of the assembly process. Considering how systems' design affects users' behaviors and decisions [46, 122], we focus on the intersections between systems and users during the team-assembly process.

Although these studies provide valuable insights on team assembly in general, the specific impact of technology on team assembly has not yet been studied in depth. Most prior studies on team assembly were conducted in traditional workplace settings and are grounded in theories developed in offline contexts [65]. There are a few studies on team assembly supported by systems, and they vary by context [65]. More theoretical work on team-assembly systems is required because we know that socio-technical systems reconfigure team formation, member interactions, and the process by which team members become familiar with one another. However, we do not know how and why. While members are assembling teams using these systems, communication can be asynchronous, members can be located in different places [98], and not all members' characteristics are readily revealed [28]. One systematic literature review on team formation at CSCW [82] shows the sparsity of theoretical work contributed from 1990 to 2018. This review proposes a conceptual framework to classify CSCW systems according to three dimensions: *agency* (whether team members organically assemble their teams or are assigned to them), *scale* (from dyads to communities), and *supporting technologies* (from expert-finder systems to virtual worlds). While novel in its contributions, this review only covers articles published at the ACM CSCW conference and excludes articles from other relevant computer science conferences and journals. A second systematic literature review on group formation for collaborative learning [158] highlights the increasing use of algorithms for assembling student teams—some of those can be configured by users, and others are already pre-set by machine learning techniques. This review also shows how diverse team-assembly methods can be: from students being able to choose their teammates to instructors who assign membership and design student teams. As a further limitation, this review only covers articles related to collaborative learning, excluding other fields such as crowdsourcing, work organization, or research teams.

Since prior scholarship has not provided a complete picture of how systems support team assembly, and not synthesized the team-assembly literature among all computer science disciplines, this paper addresses this gap by providing a taxonomy on how team assembly unfolds on socio-technical systems.

2.3 CSCW conceptual frameworks

Once computer technologies became accessible in workspaces, CSCW scholarship began designing conceptual frameworks that represented systems' components, their relationships with their users, and their impact in the workspace. Since its creation, the field of CSCW has developed several

taxonomies of collaborative systems. The goal of these taxonomies is to understand how the design of collaborative technologies influences people's work [162].

In the 1990s, groupware-centric models were the most prominent frameworks developed and emphasized systems' physical components. Multiple authors published theoretical frameworks to explain group functions. Johansen's taxonomy [98] became one of the most cited theoretical pieces to explain groupware systems. This taxonomy characterizes systems according to two dimensions: *time* and *space*. These two dimensions arrayed types of technologies that support groups as working: (i) synchronously or asynchronously, and (ii) face-to-face or distributed settings. Despite its theoretical contribution, little emphasis has been put on Johansen's work on small and large groups using these systems [121]. Ellis, Gibbs, and Rein [56] defined two different dimensions to describe groupware systems: *common task dimension* (i.e., to what extent users are focusing on the same specific task) and *shared environment dimension* (i.e., to what extent users are aware of the other members who are collaborating in a single online space). Grudin [75] developed a conceptual framework to distinguish the different kinds of technologies and their specific users, from an individual using a personal computer to an entire organization establishing its technological infrastructure. Grudin's taxonomy is diagrammed as four concentric rings characterizing types of systems within their respective fields of computer science research. The outermost ring shows the inherent nature of information studies at the organizational level, while the innermost ring shows the relationship between HCI research and PC applications at the individual level. According to this taxonomy, CSCW research emphasized the small-group level and analyzed applications that support teams' activities. Gutwin and Greenberg [77] proposed a *workspace awareness* framework to disentangle the generation and execution of tasks done by groups in digital workspaces. This framework is designed as a perception-action cycle, where the system's users must execute actions to affect the environment or explore the environment to gain more knowledge from it. As a result of this knowledge-construction cycle, this framework proposes specific mechanisms that help users maintain high levels of awareness.

The groupware architectures' shortcomings in not adequately examining the social dimensions that characterize everyday work practice soon became apparent to CSCW scholars [1]. In order to address users' requirements—and based on individual and group activities performed on systems—Schmidt and Rodden [180] outlined seven requirements for a CSCW platform that they argued are necessary for supporting cooperative work: allowing *informal interaction* to support distributed activities, *information sharing and exchange* among users, *decision-making* mechanisms to reach agreement on particular issues, *coordination and control protocols* to reduce the complexity of work, and *domain directories* to provide services to the users and to index objects on the systems.

Cruz et al. [44] completed a systematic literature review of CSCW frameworks considering studies from 1987 to 2002. They found how several disciplines—including many social sciences—have shaped the theoretical developments of the CSCW foundation. The review found six socio-technical dimensions frequently discussed in the CSCW literature: *communication*, *coordination*, *cooperation*, *time and space*, *regulation*, *awareness*, and *group dynamics*. These dimensions provide measures to analyze aspects of technological systems, but the authors emphasized the lack of terminological consensus. To update these conceptual dimensions according to the social technologies that have since been developed, Lee and Paine's Model of Coordinated Action [121] expands previous groupware-centric models by considering the following measures: In addition to time (which they relabel as *synchronicity*), place (*physical distribution*), and *scale*, this conceptual framework introduces the *number of communities*, *planned permanence*, and *turnover* to characterize the inclusion, local and temporal presence, and the addition and removal of group members.

As the CSCW research unfolded, conceptual frameworks began to address more specific socio-technical infrastructures. Furthermore, since multiple solutions started to emerge in the market—offering several functionalities and affordances for similar purposes—the digital ecosystem became more socially complex [71]. The development of cooperative technologies—which turn into more diverse, social, and contextual systems—allowed for the specialization of conceptual frameworks. In one article, Rae et al. [168] presented a conceptual framework to explain *telepresence* on collaborative systems using seven design dimensions: *initiation*, *physical environment*, *mobility*, *vision*, *social environment*, *communication*, and *independence*. Each dimension is described with several characteristics related to the technologies' configuration and interactional aspects with their users. In another article, Morschheuser et al. [147] created a classification for *gamification* features based on two dimensions: *cooperative* and *competitive* goal structures. In the first dimension, features promote shared goals for a group or promote individual goals. In the second dimension, the game promotes competitive features—where the goal is to defeat or have better performance than other users—or noncompetitive features—where no one is defeated, and comparisons are not made between teams. In another article, Wulf et al. [216] proposed a research framework to analyze social practices, design technological artifacts that support those practices, and investigate the appropriation of the designed artifacts. This framework can be applied in four domains: cooperative work, community support, social and ecological sustainability, and elder societies. In another study, Stuart et al. [190] proposed a conceptual framework for *social transparency*—which they defined as the availability of social meta-data surrounding information exchange—on the Internet, considering three dimensions: users' identity, content, and interaction. This conceptual framework provides theoretical explanations of how social cues displayed in these platforms can affect users' behavior and decisions. One last example is provided by Foong et al. [64], who propose a conceptual framework to highlight critical processes that affect *online feedback exchange* (OFE). Based on an end-to-end cycle, the model distinguishes five activities that impact the design, use, and success of OFE: deciding when to seek feedback, presenting work and asking for feedback, incentivizing providers to give feedback, adapting feedback to designers' work, and making sense of feedback and integrating into revisions.

Although these previous taxonomies provide theoretical developments for the CSCW field, the literature lacks a single systematic way to conceptualize and evaluate team assembly supported by systems [65]. The sparsity of CSCW bibliographical work—combined with the lack of emphasis on social processes—motivates the need to expand our understanding of how individuals team up with others and how teams emerge in cooperative-work systems [82, 182]. The goal of this taxonomy is to provide theoretical and practical guidelines on how people use systems to assemble teams.

3 A TAXONOMY OF TEAM-ASSEMBLY SYSTEMS

In this section, we introduce a taxonomy to classify team-assembly systems. The theoretical background and conceptual frameworks reviewed above emphasize the contextual factors that users face when they decide to work together. However, the extent to which the systems allow users to *control* the team-assembly process has not been extensively discussed, leaving out some of the social dimensions of forming teams. First, the team-assembly process can be initiated by the team members, by external actors who decide on team members' interactions, or by the system itself. Ultimately, system designers determine how each user can control the team-formation process, interact with other users, and act on the system. Second, team-assembly decisions are highly interrelated since choosing an individual for a team means excluding others from that team and disregarding alternative team members. System designers have to decide what role the system will have during this sequence of decisions, and which users can make the decisions that affect the final teams and their composition. The final team composition will become less predictable when

the system allows multiple users to decide and influence the team-formation process. Because assembling teams is a collaborative process, which would require users' actions to define team memberships, we posit that a taxonomy for team-assembly systems must consider (i) to what extent systems grant users control of their searches, teammate preferences, membership, and final team composition; and (ii) the number of users that the system allows to participate in the team-assembly process. Socio-technical systems may provide varying levels of control to users ranging from full-control, where each user is free to decide which team she/he wants to belong to, to a no-control situation where each user is assigned to a team by a third-party or by an algorithm [82]. Therefore, we argue that understanding *what* users can do and *how many* users control these team-assembly processes is key to the design and implementation of team-assembly systems. More specifically, we argue that the level of users' control allowed by the system during the team-assembly process is particularly salient for understanding the final team composition. Thus, we introduce (i) users' agency and (ii) users' participation as two dimensions of this taxonomy.

3.1 Dimension 1: Users' agency

The first dimension, taken from Harris et al. [82] and Coyle et al. [42] studies, measures the extent to which systems enable users to exercise their agency during the team-assembly process. Coyle et al. [42] defined agency as "*a person's innate sense of being in control of their actions and through this control of being responsible for, or having ownership of, the consequences of those actions.*" Thus, we understand users' personal agency as the control that users have over the team-formation process on the system. Harris et al. [82] provided a spectrum of assembly mechanisms arrayed by agency: from high user agency conditions, where the user has complete control over whom they team up with, to low user agency conditions, where users have no choice in whom they are assigned to work with. Users' agency—or lack thereof—is also discussed in Eftekhari, Ronaghi, and Saberi's study [55], which describes the formation of *organic* and *algorithmic* teams. Organic teams are formed by the members themselves, who are able to leave a team and join another at any time. Algorithmically teams are often assembled by an instructor, who determines the criteria and association rules. In contrast with their rigid definitions, our taxonomy provides nuances between users' and systems' decisions and considers the synergy between these two entities. Users can both exercise certain levels of agency and be supported by systems. Considering these previous studies, we aim to extend theoretical knowledge in users' agency for team assembly.

Clearly, users' agency has consequences for the team-formation process. On the one hand, when users have control over the team-assembly process, they exercise their agency by searching for potential team members, identifying potential candidates, and finally choosing members for their specific team. On the other hand, when users cannot exercise their agency, team-assembly processes are controlled by the socio-technical system often through the use of algorithms. We define *user-driven* team assembly when users can exercise their agency in the system, and thus, the teams are formed by the users themselves. In contrast, we define team assembly as *algorithmically-driven* when users cannot exercise their agency in the system, and therefore, their teams are assembled by the system itself.

In these socio-technical systems, users that exercise their agency can be *internal members* of a team (e.g., students choosing their teammates) and *external individuals* who use the system to form teams (e.g., an instructor creating teams for his/her students). Two examples of users driving the team-assembly process in concert with technology are: (i) users looking for potential teammates on a social networking platform, or (ii) an instructor simulating different team assembly criteria using a system. In contrast, when the team-assembly processes are driven by systems, the decision-making process is more likely to rely on independently specified optimization logics, such as minimizing individuals' differences, matching individuals' availability, or maximizing team members' skills.

Systems—and their algorithmic components—can be part of team-assembly processes to varying degrees, whether the team is assembled, or staffed, by an outside agent or self-assembled by the members themselves.

3.2 Dimension 2: Users' participation

The studies reviewed in the theoretical background section demonstrated that team assembly actions could be run by a single person (e.g., a leader, an instructor) or be carried out collectively (e.g., individuals voting for their teammates). We capture this distinction in the second dimension of this taxonomy, which calibrates how many users can participate in the team-assembly process. This dimension is also inspired by the *scale* dimension from Lee and Paine's model [121], which they defined as the number of users—from a single user to many—who are able to act on a social platform. In our particular context, this dimension identifies how the system outlines users' participation in team-assembly actions: from one single organizing user that assembles the team to a multitude of users that assemble their own teams. Overall, systems provide a spectrum of centralized or decentralized participation among its users.

Socio-technical systems must consider how many users are going to participate in the team-assembly process since each situation would require enabling different technological architectures that would allow specific users' actions. On the one hand, *low participation* in team assembly focuses on a single user. One or a few users will interact with the system aiming to assemble the required teams. Examples of low-participation architectures are an instructor providing input to the system to assemble student teams automatically or a manager forming a taskforce by exploring and selecting its members. Some systems can provide the managing user the control to simulate, test, and redo their team combinations several times without relying on the users who will be part of those teams. After the user provides the input of the task and members' attributes (e.g., skills, social relationships), the system will continue with the team-assembly process, performing its calculations based on the programmed criteria and providing the teams as an output. As a result, teams assembled under low-participation conditions could achieve higher levels of heterogeneity, diversity, and expertise since the team builder (i) controls the team assembly criteria, (ii) has access to more information about individuals' attributes, (iii) explores how the combination of those attributes will produce specific team compositions, and (iv) determines the membership of each individual [15, 140].

The focus of low-participation architecture is how the user (or a few users) in charge of assembling teams can decide upon the team assembly requirements: Should these teams be heterogeneous? Should the team count on the best experts available? Should team members have prior relationships? Based on the systems' information requirements and team-assembly criteria, the team assembly will be controlled by a single user aiming to provide the best team combinations possible. The outcomes of low-participation systems are more predictable than high-participation systems since they depend on a few users. Uncertainty can be reduced, and replicable and scalable results can be guaranteed if algorithms are used to assemble the teams, instead of users. Overall, systems that prioritize low-participation architectures of team assembly feature the most inner circle of Grudin's rings taxonomy [75]: the interaction between the user and software applications.

On the other hand, *high participation* in team assembly focuses on the collective. In this case, team-assembly processes rely on multiple or all users. Examples of high-participation architectures are numerous users sending and accepting teammate recommendations provided by a system, or Wikipedia users forming editorial teams according to their expertise and availability. When many users participate in the team-formation processes, the decision-making process is likely to rely on the information provided by the system and the prior knowledge of other potential team members. Past research shows that competence, similarity, and familiarity are the most likely

factors that explain individuals' choice of team members [8, 86]. Users are more likely to choose to work with people whom they already know [70, 177], have collaborated with successfully in the past [80], are close friends [29, 179], and/or are popular individuals in their social networks [29]. As a consequence, high-participation architectures may produce more homogeneous teams compared to those assembled by low-participation architectures.

When multiple users are participating in the team-assembly processes, systems' group features (e.g., communication, interaction, coordination, and awareness) are fundamental to coordinate their efforts. In contrast to low-participation systems, high-participation systems enable its users to coordinate their interactions and decisions over time. Johansen's taxonomy dimensions [98]—time and space—become relevant aspects for the systems' design: developers must consider whether users have to agree synchronously or asynchronously, as well as whether they have to be in the same location or not. Schmidt and Rodden's requirements [180] are crucial to enable high-participation architectures, such as allowing informal interaction to articulate distributed activities, information sharing and exchange among users, decision-making mechanisms to reach agreement on team membership, and coordination and control protocols to assist the team-formation process.

Finally, the outcomes of high-participation systems are uncertain and less predictable than the outcomes of low-participation systems since the final decision relies on multiple users. Even if algorithms can ease the assembly of these teams, users' preferences can be varied and only known once users make their decisions on the system. In summary, systems that prioritize high participation in the team-assembly process recall the second circle of Grudin's rings taxonomy, where the emphasis is the interaction between small groups and networked technologies.

3.3 Intersecting these two dimensions

These two dimensions—user's agency and participation—define a team-assembly systems "space." By dividing this space into quadrants, we identify four categories of teams: optimized teams, staffed teams, self-assembled teams, and augmented teams (Figure 1). We examine these categories in more depth here using examples drawn from previous CSCW and HCI literature.

3.3.1 Optimized teams. Teams assembled by systems' algorithms are examples of "optimized teams." In this case, users' agency and participation are limited in the team assembly process. Generally, only one user participates in the team-formation process by providing the input data required by the system. This user does not have control over the team-formation process, and her/his only responsibility is to provide the data to the system. Systems' algorithms assemble teams based on specific criteria, such as members' characteristics and social networks. As a result, team members cannot choose their team memberships nor establish the assembly criteria. Computer science research has devoted considerable attention to developing team-formation algorithms and frameworks in this quadrant. Considering all team combinations that systems can provide—of different sizes and memberships—the primary goal of systems' developers is to use an efficient method to assemble teams. This problem has been classified as an NP-hard problem by several scholars since finding the best answer requires computing all the possible team combinations (i.e., brute-force search), which cannot be done in polynomial time [55, 58]. Contributions in this field are based on what variables and mechanisms are considered to find optimal solutions that approximate the best solutions, using less computer memory and less time.

One main characteristic of optimized teams is that they depend on (i) the input that the user provides to the system, (ii) the team assembly criteria established in the system, and (iii) the algorithms used by the system. Some systems consider the sum of individuals' skills as part of the optimization problem (e.g., forming a team of experts from a research community) as well as assigning members according to their specific roles in the team [171]. Other systems consider users'

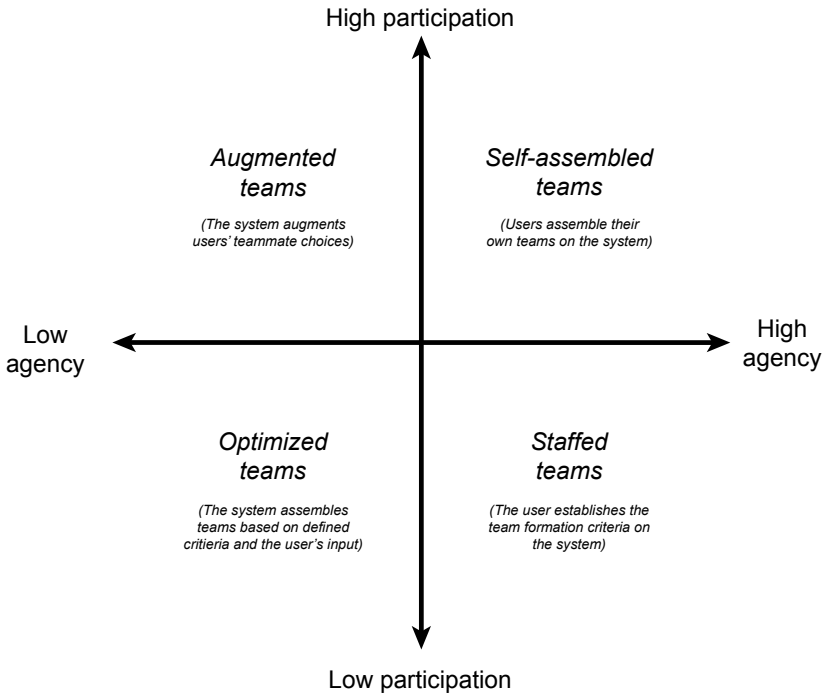


Fig. 1. The Taxonomy of Team-Assembly Systems presents two dimensions: (i) users' agency: to what extent users can exercise their agency during the team-formation process, and (ii) users' participation: how many users the system allows to participate in this process. Each quadrant defines four types of teams: optimized teams, staffed teams, self-assembled teams, and augmented teams.

social networks to assemble their groups. One example is Lappas et al. [117], which considers the team-formation problem using members' skills and social networks. The systems' goals are not only to assemble groups that meet the tasks' skill requirements but also to assemble teams that can work effectively together.

Through several methods and algorithms, these systems' objective function is to maximize a specific team's characteristics (e.g., social connections, skills covered by the team) subject to communication or personnel costs. Some crowdsourcing systems fit into this category since one of their challenges is to divide projects' tasks and assign them to crowd-workers according to their skills and availability [112]. Multiple studies consider the role of social networks, previous collaborations, and the intensity of interactions among a pool of individuals to assemble teams. Other developed systems consider how members can complement their personalities and skills to create balanced teams [129]. Furthermore, systems can alter existing teams' structures to be more effective for the current members of the team [233], and swap members between teams to facilitate new points of view in the teams [176]. Latorre and Suárez [119] develop a framework that facilitates team assembly in a systematic and reproducible way. This framework uses workers' social networks, prior experience, and previous collaborations to build compatibility networks among participants, where each connection represents whether the workers have compatible (or incompatible) social skills.

Based on previous collaboration or interactions, systems aim to assemble the most appropriate teams. In conclusion, assembling optimized teams becomes a process driven by algorithms that determine specific team combinations.

Pros: Team assembly is fast, objective, and reproducible. Helpful for assembling massive groups. It finds team combinations based on the users and task information, which are only computationally manageable. Team assembly criteria can be adjusted beforehand.

Cons: Solutions are fixed and do not provide other alternatives. Team members are usually excluded from this process. Lack of transparency for the users. Users cannot provide feedback.

3.3.2 Staffed teams. An instructor using a system to assemble student teams is an example of “staffed teams.” In this quadrant, users’ agency is high and users’ participation is low. The users of these systems are usually one individual (e.g., instructor, manager, captain, leader). Teams can be formed on the system by a person who will not be part of a team (e.g., a manager using the system to assemble a task force), or by someone who is looking for new teammates (e.g., a lead engineer using the system to find new members for her/his team). Systems are employed to support users’ decisions, simulate team combinations, or reach more members for their teams. Ultimately, the user makes the final choices based on the systems’ output. Systems can provide a unique team solution or several team recommendations to the user, who has control over the input and the team-formation criteria. In contrast to optimized teams, the team-formation criteria are established by the user, who can configure the system’s parameters, and the system provides results according to the user’s requests. Another key aspect of this quadrant, which contrasts with optimized teams, is the presence of graphic user interfaces (GUI), which allow users to control and customize the parameters to assemble teams.

One example is a sales-team builder developed by IBM [9]. This system allows users to search for potential team members, simulate possible combinations, and assign members to specific teams. Once the user selects members for a potential team, the system provides future sales predictions based on the team members’ previous collaborations and sales. Another example is CATME [120], which allows instructors to form teams by surveying students’ work styles, skills, and demographics. Based on the instructor’s criteria, the system suggests several team combinations, which the instructor can choose from.

Other systems for staffed teams help users find experts in a specific domain. Termed *expert-finding* systems in the literature, they allow users to search for experts who are likely to succeed in the team’s tasks [6]. Expert-finding systems are used to support recruitment activities, where a user can see candidates’ profiles and choose team members based on the information provided. One example is “TeamBuilder” [105], which enables groupware users to find other experts in the network. Another example is SCSTMiner [206], which allows users to find expert developers on GitHub, considering their coding skills and prior projects. One study [223] proposes a system to measure potential teammates’ willingness to collaborate. This system evaluates recommendations based on the users’ shared contacts with other candidates (i.e., closeness), their expertise differences, and the benefit that could be gained through collaboration. In summary, systems for assembling staffed teams provide structured information or recommendations to users to facilitate the assembly of these teams.

There are limitations to staffed teams. First, they might face dissonances between the overarching users’ criteria and the team members’ expectations. In a CATME study, students desired more control over the criteria selected by the instructor and explanations as to why they were assigned to a particular team [95]. In another study, Fuller [66] conducted interviews and observations in software organizations and found that assembling teams based on the company’s functional structure caused project teams to exhibit counterproductive behaviors that affect their work and

cohesion. In contrast to optimized teams, even when team members are not able to control the team-assembly criteria embedded in the system, they may find the team-assembly process more objective when it is done by a machine, rather than by a human user [192]. Second, since most assembly information depends on users' networks and inputs that they put into the system, users' bias could cause the selected team members to be too similar to the team builders, excluding more diverse memberships from the group [70, 78].

Pros: Team assembly criteria adjustable. The team-builder user can iterate several team combinations. Heterogeneous teams are easier to assemble. Supported by the system, the team-builder user can get information from members' characteristics in a feasible way.

Cons: Lack of transparency from the user who assembled the teams. Team members' feedback is limited. Teams' viability and members' agreement depend on how much they trust the user who assembled the team.

3.3.3 Self-assembled teams. Players assembling their own teams in a virtual game is one example of "self-assembled teams." In this quadrant, users' agency and participation are high. These teams arise more or less spontaneously from self-organized activity that flows within existing patterns of relations among users, tasks, and systems. For more planned teams, systems enable users to search for, invite, and choose their teammates as they interact and meet each other on the platform [70]. The teams' final composition does not emerge until the team assembly stage is completed since membership relies on the sequential choices made by users. For less planned self-assembled teams, users' membership can vary over time as they navigate and use the system. These teams are more likely to change their composition over time since multiple members are entering and leaving the team [121]. As a result, these self-assembled teams of many sizes, characteristics, and purposes will emerge [172].

Systems facilitate self-assembled teams by relocating users' face-to-face interactions to virtual spaces in which interactions can be synchronous or asynchronous. Since systems coordinate users' decisions and interactions, users can search for, select, and choose their teammates at different moments and in different locations. One example is *MyDreamTeam* [49, 68], which enables students to assemble teams by themselves. In other open platforms, teams can emerge from users' interactions and systems' affordances. Wikipedia is another example where editors work on the edition of thousands of articles. Keegan et al. [109] found that articles drove the assembly of editorial teams, which brought those with prior editing experience. Other examples can be found in multiplayer game systems in which players team up with others based on their skills, expertise, and relationships [110]. One study of *e-sports* [65] found that novice and professional teams have different self-assembly strategies: While novice teams' members asked their friends or relatives to be part of their teams, professional teams' members conducted interviews and had face-to-face meetings—lead by current team members—to find new members. Designing open spaces for self-assembly can also be found in social media platforms, which provide open socio-technical architectures in which users are allowed to have interactions among themselves with lower barriers [161].

These teams have drawn scholars' attention because team members are allowed to choose teammates, and their choices are more likely to be driven individually rather than collectively. As a result, the formation of heterogeneous teams is not guaranteed. Prior studies show that self-assembled teams are more likely to have lower levels of cognitive and demographic diversity because most users will team up with other users who are similar and familiar to them [54]. Therefore, self-assembled teams are more likely to be homogeneous than the other types of teams [55]. In the context of start-ups and firms in the high-tech sector, Hart [83] found that foreign-born founders are more likely to team up with others who are foreign-born, and more likely than white

founders to team up with women and other minorities. Gómez-Zará et al. [70] found that users tended to self-segregate members when they were assembling teams in online environments based on their human and social capital. Although most users were aiming to work with competent and social individuals, they selected other users whom they already knew. As a result, unskilled and less-connected users were less likely to find a team and they required the assistance of the system's administrator. In other words, segregation is also likely to occur when users are self-assembling teams on these systems.

Self-assembled teams' performance has also been an aspect of research interest [33]. Research questions about their performance have been addressed mostly in offline contexts. For example, Rusticus and Justus [174] found that students' self-assembled teams had better academic performance and group work contributions than teams assembled by teachers. Kim et al. [111] studied self-assembled teams playing the online game "League of Legends" and found that these teams were very competitive when they include a female team member and when their members have higher levels of social perceptiveness. Wax et al. [212] studied teams on Dragon Nest (a web-based MMORPG) and found that players were more likely to assemble teams with those geographically closer, which can be explained by reducing time-zone and cultural differences. Future research should explore whether self-assembled teams on these platforms outperform teams assembled by algorithms or third-parties.

Pros: Systems enable users to choose their teammates. Team members are more likely to be committed to the team's tasks when they can choose. Users' decisions are transparent.

Cons: Team composition is only known at the end of the team-assembly process. Segregation and discrimination are likely to occur among users. Teams are likely to be homogeneous. Some users can end up without a group and feel excluded.

3.3.4 Augmented teams. A system that helps users find the most appropriate teammates results in "augmented teams." In this quadrant, users' agency is low but user's participation is high in the team-assembly process. Rather than providing all the possible choices, the system narrows users' teammate options by highlighting potential candidates and hiding less feasible candidates. We call these teams "augmented" because the systems are designed to augment users' choices and interactions with others [153, 181]. Since users have to choose from a vast number of team combinations and potential teammates, systems can facilitate users' searches and choices by narrowing their options. By analyzing users' traits and social networks, systems can highlight potential teammates who are more likely to succeed in working with the user. For example, systems could suggest competent teammates who are already familiar with the users [177], or recommend teammates who provide the right combination of psychological traits [39]. As users explore and choose from the options curated by these systems, these augmented teams emerge.

Compared to self-assembled teams, users' choices are strongly influenced by systems. In particular, systems determine, curate, and present potential teammates to the users based on their operating algorithms. As a consequence, some teammate alternatives will not be visible to the users. Because of this intervention, users' agency is more limited since their options are reduced and determined by the socio-technical system. The focus of these systems is the algorithmic intervention performed in the team-assembly process, which might introduce algorithm bias and reduce transparency [155].

In contrast to optimized teams, augmented teams systems allow users to participate in the team-formation process, supporting them to find teammates, express their preferences, and provide feedback about the teammate candidates suggested. Instead of a single user controlling the team-assembly process (e.g., instructor, manager), team members participate in the assembly process and take advantage of the systems' computational capabilities to discover suitable teammates. Another

difference is the final outcome. While forming optimized teams is reproducible and predictable, forming augmented team systems leads to unknown teams' final composition because it depends on the sequential decisions that each member makes, which is unknown *a priori*.

One way in which augmented teams can be assembled is through *recommender systems*, which attempt to recommend the most suitable potential teammates to users according to specific criteria [22]. Recommending teammates is not easy since each recommendation is correlated to other users' decisions (e.g., one recommended candidate may already be in another team). Recommendations also are temporary and become narrowed over time since other users are assembling their teams too. One example of a recommender system is a social platform that assembles taxi drivers teams [230]. After registering, users decide whether they want to be a leader of a team or not. Leaders have two options: they can self-assemble their teams without input from the system, or choose teammates from a list of recommendations that the system provides based on users' driving data. Members can accept or decline a leader's invitation.

Despite the low agency that users exercise in this quadrant, systems promote users' participation by asking for their teammate preferences. Users' teammate preferences can be used as an input to assemble their teams. One example is Joseph et al.'s system [99], which first asks students with whom they would like to work, and then, assembles the team to maximize their preferences. A second example is a team formation system developed by Wang and Zhang [207], which allows leaders and team members to negotiate their team membership. This system mediates this negotiation by identifying the best candidates for the team's objective, the required skills for the project, members' competence, and available vacancies. In a third study by Cavdur et al. [30], a two-phase allocation system allocates students and academic advisers to project teams based on their teaming preferences and qualifications. The system creates balanced teams based on students' preferences and optimization parameters, and then allocates academic advisors to each team in the same way. The sequential combinations of users' decisions and algorithmic calculations allow the assembly of the final teams. These are examples of systems in which users are constantly choosing those with whom they would like to work and providing feedback to the system, while the system curates this information to assist the assembly of these augmented teams.

A final design example of augmented teams considers interactions between users and computational agents. Based on multi-agent systems, scholars have provided hybrid solutions that enable users and agents to facilitate the team-assembly process. An exemplary study by Durfee et al. [53] presents a system in which agents mediate between a staffer user who requests a team of experts and the experts who use the system. The system is comprised of four computational agents who mediate the interactions between the staffer and the experts: a matchmaking agent (who consults potential experts in the system's databases), an expert agent (who mediates between the expert users and the system), scheduling agent (who finds the experts most likely to be available for the requested team), and a collaboration agent (who mediates interactions between the staffer and the other computational agents).

Overall, increasing users' participation is likely to provide higher levels of satisfaction with the team-formation process and increase the chances of success of those teams [31]. Despite the fact that users can participate, their agency is limited since their teammate options are dictated by those presented by the system. Therefore, their agency is lower compared to self-assembled teams. Moreover, the curation of recommendations can raise concerns about systems' fairness and transparency [21]. Augmented teams depend mostly on the systems' features and team formation criteria established by the developers, which ultimately defines the interactions that users are allowed.

Pros: Systems augment users' choices by managing information about users' attributes, relationships, and availability. Team assembly criteria can be designed by the systems' developers

beforehand. Heterogeneous teams are likely to be assembled. Users can participate in the team-assembly process.

Cons: Teammate recommendations might lack transparency and fairness. The final team composition is only known at the end. Some users may end up without groups.

4 EXAMINING THIS TAXONOMY THROUGH A SCOPING REVIEW

To position this taxonomy within the current computer science literature, we mapped relevant articles into their respective quadrants. This decision was made to account for the increasing quantity and evolution of these systems over time, as well as to identify potential paths for future research. We followed the review methodology done by Harris et al. [82], which performed a scoping review methodology [14] and used the Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA) guidelines to report methods and results [145]. Scoping reviews are used to map literature in a specific field or area of research and to identify gaps in the research that may lie [14, p. 2].

4.1 Eligibility Criteria: Inclusion and Exclusion of Articles

Inclusion. This review includes articles that refer to team assembly. Articles were eligible for inclusion if they: (i) described, analyzed, or developed technologies, systems, or algorithms involved in searching for, selecting and incorporating members into a team; (ii) its research questions or hypotheses considered the processes or consequences of adding, modifying, or removing team members; (iii) there was at least one human user involved; and (iv) were published between January 1990 and March 2020. If the article has multiple publications, we selected the most recent or complete version. Similarly, if it has both a conference and journal version, we selected the journal version.

Exclusion. We excluded articles that (i) did not study any aspects of team assembly; (ii) developed or analyzed technologies to support teams already assembled; (iii) analyzed formation as processes that take place after the team is assembled, such as group identity, transactive memory, or shared mental models; (iv) consisted in assembling robot teams or machine teams; (v) consisted of multi-agent systems; (vi) analyzed teams with only two members; (vii) were meta-analyses or literature reviews; and (viii) were presented in a language other than English.

4.2 Search Strategy and Data Sources

We conducted the first step, “Identification.” Unlike Harris et al. [82], who only reviewed articles in the ACM CSCW proceedings, we expanded the search databases and included articles published on the ACM Digital Library, IEEE Xplore Digital Library, and Springer Link. First, we performed several searches to assess the volume of potentially relevant studies according to the eligibility criteria. We built and identified keywords and search terms from the research topic, our theoretical background, and suggestions by other scholars [195, p. 215]. After several iterations, we used “(*team formation*) OR (*team assembly*) OR (*group assembly*) OR (*group formation*)” as our final search query. After defining the search query, we searched and exported the results from each library. Following [82]’s search strategy, we only included Research Articles (excluding posters, extended abstracts, and shorter contributions) to ensure that our review only included work in advanced research stages. Finally, to make a more comprehensive corpus for analysis, we added the following filters in each library:

- *ACM Digital Library:* Results within “Research articles.”
- *IEEE Xplore Digital Library:* Results within “Conferences,” “Journals,” and “Magazines.”
- *Springer Link:* We selected “Chapter,” “Conference Paper,” and “Article,” as Content-Type. Since the first search gave us more than 2,000 articles and the search system only allowed

us to download 1,000 articles, we added as an additional filter, “Computer Science” as the discipline, and “User Interfaces and Human Computer Interaction” as subdiscipline.

As a result of these searches, we found 961 articles from the ACM Digital Library, 595 articles from IEEE Xplore Digital Library, and 625 articles from Springer Link. While we exported the results from IEEE Xplore Digital Library and Springer Link to a CSV file, the results from the ACM Digital Library were exported to an EndNote file. We merged the three files into a single CSV file resulting in 2,181 articles. We then removed one duplicated article using the articles’ DOIs. Using the articles’ titles, we identified 29 articles with the same authors duplicated. Some of these articles were published in two online sources. Other articles had a conference and journal version, which we kept the latter. This left 2,150 articles for screening.

We tabulated articles in a Microsoft Excel spreadsheet, capturing metadata such as title, publication year, authors, DOI, abstract, and keywords. Once we recorded the metadata, we hid the authorship information to avoid any potential bias during the coding phase.

4.3 Article Selection

One of the authors (henceforth, referred to as the coder) manually screened all retrieved articles’ titles and abstracts. The coder proceeded to screen articles for inclusion through a three-stage process. First, the coder reviewed the retrieved articles’ titles and keywords (i.e., level-one screening). Articles whose titles or keywords met the Inclusion & Exclusion eligibility criteria were retained. From this stage, the coder selected 264 articles. Then, in the level-two screening, the coder performed a second review that included the articles’ titles, keywords, and abstracts. If the coder found that an article met the Inclusion & Exclusion criteria, it was coded as 1, if not, as 0. From this process, the coder selected 163 articles for full-text article review (i.e., “Eligibility” phase).

In the third stage, the authors went through two cycles of revision. First, the coder read each article in its entirety. Based on a full-text analysis, the coder again classified each article as either 1, included, if it met the inclusion criteria, or 0, if it did not. Ultimately, the coder selected 126 articles. The coder then presented the selected articles to the other authors, who reviewed the coder’s classification in a second cycle together. The authors agreed to analyze the 126 articles, and the coder continued with the data extraction and synthesis stage.

4.4 Data Extraction and Synthesis

The coder extracted data from all included articles using a pre-designed electronic form. The coder extracted data pertaining to (i) the computational method used by the system to assemble teams, (ii) systems’ input, (iii) team-assembly criteria, (iv) whether the article presents a model or tool [166], (v) the dataset used, and (vi) context of the study. In order to classify each article according to this taxonomy, the coder answered the following questions: (vii) Who participates in the team-formation process?, (viii) Who generates the teams?, (ix) Can users decide on their team membership?, and (x) Can members express their teammate preferences in the system? The coder used the answers to these questions to classify each article according to its respective (xi) taxonomy’s quadrant (optimized teams, staffed teams, self-assembled teams, or augmented teams). During this data extraction process, the coder took open notes and memos to synthesize the article’s key findings. The coder managed and analyzed the data using a Microsoft Excel spreadsheet, which is available in the Supplementary Materials.

After the coder completed the full-data extraction, the authors met again and discussed the coder’s main results. To ensure that the coder’s classification was reliable and exhaustive, the authors discussed and reviewed each article’s classification until they reached an agreement. Discrepancies

were resolved by discussion, and the authors reached a consensus on the final classification of papers.

5 RESULTS

The coder identified 2,150 unique articles that were screened for inclusion, from which 163 full-text articles were retrieved for further assessment. From these articles, 126 were included in the final review (Figure 2). These articles addressed the architectures, mechanisms, processes, and users' behaviors on systems that supported team assembly. The most common reason articles were excluded in the eligibility stage was that they did not focus on team-assembly strategies. Thirty-seven articles passed through the screening stage but were not included. Many of the excluded articles did not use a socio-technical system, were not available to download, had another version that was already included, or were not in English.

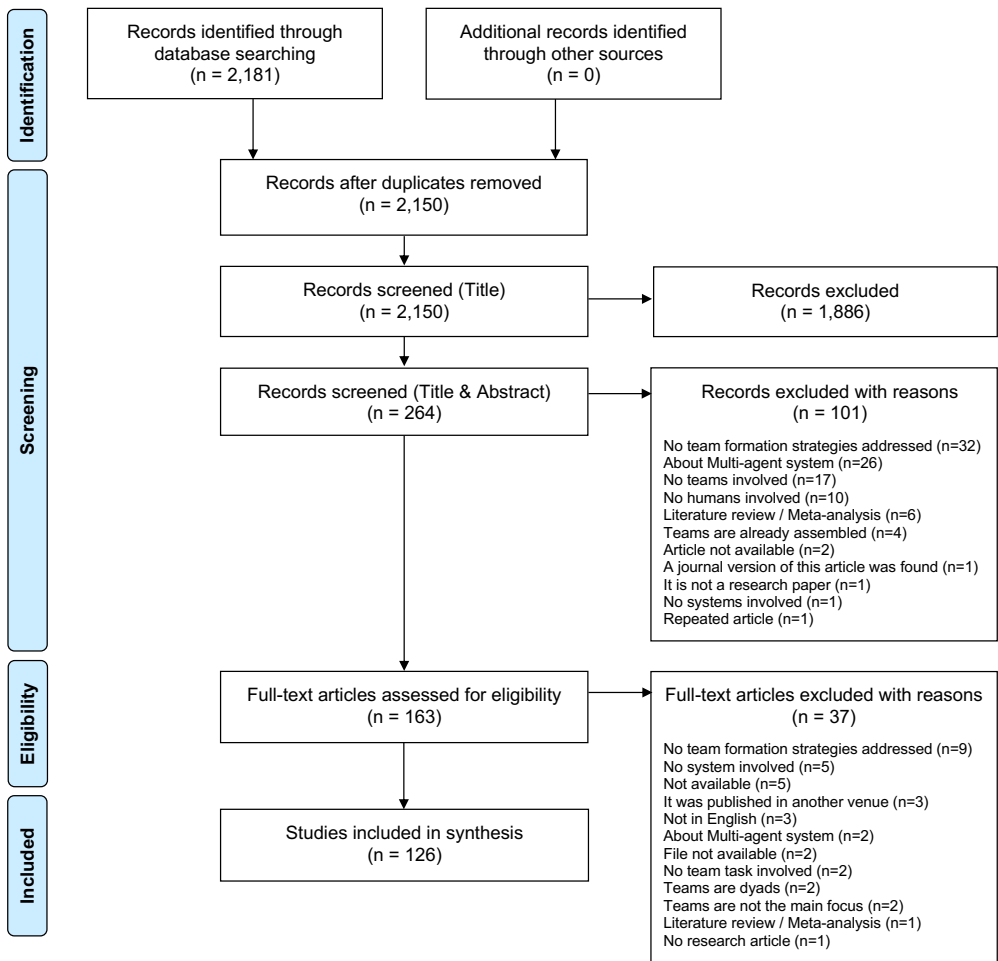


Fig. 2. PRISMA Flow Diagram for this study. It presents the details of the article selection process.

5.1 Description of the Included Articles

Table 1 provides a description of the included articles. Most of the articles were published in the IEEE Xplore Digital Library (57.94%), followed by the ACM Digital Library (30.95%), and finally, the SpringerLink (11.11%). The majority of the articles were published from 2015 onwards (53.17%), one-third were published between 2010 and 2015 (34.92%), and only 3 articles were published before 2005 (2.38%). We found that 41.26% of the articles were written about student teams, 29.46% on expert teams, and 11.90% on teams in the industry.

From this corpus, 63.49% of the articles presented a model, in which only the system’s method is implemented and evaluated with existing datasets, and 36.51% of the articles presented a tool, in which the entire system is implemented, designed, and evaluated by real users. Regarding the databases used, the majority of the articles tested their systems using their own databases (65.87%), including synthetic databases or using data from students. The second most common database was the DBLP database (12.70%), which provides computer science bibliography metadata. We also found articles using databases from crowdsourcing platforms, such as GitHub, Upwork, and Wikipedia. Finally, eight studies analyzed videogames databases (e.g., Battlefield4, DOTA, FIFA 2018).

The methods proposed in these articles were varied, showing diverse approaches to assist team assembly: from genetic algorithms, clustering algorithms, dynamic programming, fuzzy algorithms, greedy algorithms, and stochastic algorithms. No one of these techniques represented more than 5% of the corpus. More details of each article are available in the Supplementary Materials.

	Augmented teams	Optimized teams	Self-assembled	Staffed teams	Total
Year period (5 years)					
1990	-	-	1	-	1
1995	-	-	1	-	1
2000	-	-	-	1	1
2005	2	4	1	3	10
2010	5	23	3	13	44
2015	15	33	8	11	67
2020	-	2	-	-	2
System type					
Model	14	49	8	9	80
Tool	8	13	6	19	46
Source					
ACM	8	17	5	9	39
IEEE	11	41	7	14	73
SpringerLink	3	4	2	5	14
Context of the study					
Community	-	-	-	1	1
Crowdsourcing	5	3	2	1	11
Expert teams	2	25	3	7	37
Health	-	2	-	-	2
Industry	2	8	1	4	15
Learning	12	22	3	15	52
Virtual games	1	2	5	-	8

Table 1. Characteristics of the included articles

5.2 Classification based on this taxonomy

To characterize the articles included in our scoping literature review, we classified them according to one of this taxonomy’s four quadrants. Each article was classified in only one quadrant. We found that the distribution of systems was not homogeneous among the quadrants (Table 2).

Most of the included articles focused on “optimized teams,” 62 articles in total (49.21%). Overall, these articles proposed different methods and algorithms to resolve the team-formation problem,

subject to communication and personnel costs. The goal of these articles was to find fast and efficient methods to assemble one team or to group individuals into several teams. In the majority of these studies, authors implemented their method and compared their speed and accuracy with other algorithms, and then evaluated them using databases. We found 28 articles that enabled “staffed teams” systems (22.22%), which developed tools for instructors and managers. Overall, these papers present different systems that support users to assemble heterogeneous teams or teams with the most suitable experts. These articles provide tools to simulate and explore different team combinations. The next type of team was “augmented teams” (17.46%), with 22 articles. Most of these articles were published after 2015 and developed recommender systems. Users’ social networks and team preferences feed systems’ recommendations. Finally, 14 articles of this corpus enabled “self-assembled” teams (11.11%), which were mostly related to multiplayer games. These studies aimed to understand how users chose teammates and analyzed which factors were most likely to explain their choices.

From the classification process, it is clear that in most existing systems’ designs resulted in limited user’s agency (84 articles). In only one-third of the articles, the systems delegated team assembly decisions to their users, enabling them to decide who would be part of the team (42 articles). Moreover, in 90 articles, the systems allowed only the participation of a single user. And in 36 articles, systems enabled the participation of multiple users in the team-formation process. Since this classification was unbalanced, we checked other conceptual frameworks from prior studies to see if they had balanced or unbalanced article classifications. We found that López and Guerrero [128] used Johansen’s taxonomy to classify CSCW articles related to awareness. In this study, most articles were concentrated in the distributed (rather than co-located) dimensions, showing that they also had an unbalanced distribution.

	Included papers	Most frequent keywords
Optimized teams (n=62)	[3–5, 10, 12, 16, 17, 26, 32, 34, 35, 37, 59–61, 73, 81, 84, 87, 94, 97, 100–102, 106, 117, 118, 123, 125, 127, 131, 133, 141, 144, 148, 149, 152, 154, 156, 157, 167, 169, 176, 183, 185, 186, 188, 189, 194, 210, 213, 218–222, 227, 229, 231, 232, 234]	Problem, Social, Algorithm, Task, Experts, Cost, Students
Staffed teams (n=28)	[9, 11, 13, 23, 24, 38, 43, 45, 47, 57, 85, 92, 95, 107, 113, 114, 116, 124, 132, 138, 159, 164, 173, 184, 214, 217, 224, 225]	Students, Collaborative Learning, Criteria, Model, Experts, Data
Self-assembled teams (n=14)	[7, 8, 18, 55, 62, 65, 70, 89, 91, 104, 165, 205, 223, 226]	Social, Online, Games, Networks, Choose, Communities
Augmented teams (n=22)	[36, 39, 48, 52, 63, 72, 99, 126, 129, 130, 134, 139, 142, 143, 160, 177, 178, 191, 193, 200, 208, 209, 230]	Workers, Social, Algorithm, Preferences, Network, Crowd

Table 2. Classification results from the scoping literature review

6 DISCUSSION

In this paper, we established the need for CSCW scholarship to extend existing theories to account for the increasing use of systems to assemble teams. We provide a taxonomy to understand the role of socio-technical systems and users during team assembly. Based on CSCW and team research

literature, we propose users' agency and participation as the two dimensions of this taxonomy. These two dimensions manifest as four types of teams enabled by systems: optimized, staffed, self-assembled, and augmented teams. After developing this taxonomy and situating it within the current literature, we now elaborate on the implications of this conceptual framework.

First, our taxonomy extends theoretical work on socio-technical systems to account for team-assembly processes. Based on our review of prior literature on team assembly, we found that assembling teams using socio-technical systems has not been systematically explored, nor analyzed vis-à-vis systems' affordances, algorithms, and designs that influence the final team compositions. After exploring CSCW conceptual frameworks, we observed how systems that organize people together into teams have been barely addressed or discussed. Just recently, Harris et al. [82] examined group formation in CSCW proceedings and found that users' agency, the scale of socio-technical systems, and the several collectives that individuals can forge are fundamental dimensions that system developers and designers should consider. However, their study only covered contributions published in the ACM CSCW proceedings and excluded relevant findings from other computer sciences subdisciplines, such as human-computer interaction, recommender systems, or learning sciences. Moreover, the need to uncover the relationship between users and their contextual factors leads to a greater understanding of how team-assembly processes unfold [15]. For example, Harris et al. [82] did not consider how users participate in the team-formation processes. This has consequences for users' teammate expectations and team composition. Integrating research in computer and social sciences is fundamental to understanding team assembly facilitated by systems through a holistic perspective. Ultimately, the systems' architecture and features must integrate users' agency and participation, and their larger social context, in order to enable the assembly of more effective teams. While we built this taxonomy from multiple pieces of CSCW, HCI, and management science literature, this work is only an early step along a larger path to contribute to our theoretical knowledge of teams assembled using socio-technical systems.

Second, our taxonomy disentangles the influence of socio-technical systems on team assembly. We found that systems' architectures and components have a deep impact on users' choices and, ultimately, define the teams to which they will belong. While the studies reviewed in our theoretical background have shown that forming teams depends on their context, task, and members, this taxonomy shows that forming teams using socio-technical systems depends heavily on the architectures, algorithms, interfaces, information, and affordances that systems provide. Thus, the degree of users' agency and participation in the team-assembly stage have consequences for users' interactions, recommendations, options, expectations, and decisions. Only when system designers consider these two dimensions based on the teams' context, goals, norms, and tasks, they can leverage users' choices for teammates through the use of relevant information and opportune teammate recommendations. Alternatively, when these dimensions are not considered, they can exacerbate users' biases and dissatisfaction, resulting in less efficient teams. In light of these socio-technical repercussions, this taxonomy encourages system designers to reflect on if the systems' affordances must enable users' agency based on the creation of homogeneous or heterogeneous groups. Additionally, system designers should examine how many users will participate in the team-assembly process, as this will affect users' motivation and engagement with the system, and ultimately, with the teams they create. Ultimately, the configuration of users' agency and participation in the system—such as allowing users to reach out to one another, or by displaying how many contacts they have in common—has significant repercussions in users' teammate decisions and in the teams' final composition. By using this taxonomy, we want to make users' agency and participation an important part of systems' architectures that facilitate team-assembly processes.

6.1 Theoretical implications

After introducing each one of the taxonomy's quadrants and the systems they contain, we provide implications that leverage our understanding of the role of users and systems in team assembly.

First, research about self-assembled teams shows that when users are allowed to exercise their agency, they are likely to follow similar rules as to when they are forming teams offline. Similarity and familiarity were the most likely factors to explain users' teammate choices [7, 55, 62]. Consequently, this inclination for similar and familiar people has led many systems to consider users' traits and social networks as part of their solution in their algorithms and features. In other words, many systems have been designed to exploit users' characteristics to enable more likely teammate connections. By making visible users' previous collaborators, friends, common relationships—and highlighting similar characteristics—systems provide more natural ways for users to find and choose partners [70, 103]. Certainly, there is a tradeoff. Allowing users to drive team assembly efforts increases the likelihood of homogenous teams. Systems can reduce users' inclination for similar people by promoting a *conscious* reflection on how diversity can help them achieve teams' goals, and how to choose the teammates who are best suited for those tasks [69]. Other design alternatives to prevent homogenous teams include presenting the most diverse teammate recommendation at the top of the search results [74], or consider embedding users' attributes at the cognitive level (e.g., teammates' complementary skills, backgrounds, or personalities) in assembly algorithms [111, 187].

Second, multiple solutions were found in the staffed-teams quadrant, where the user's agency is allowed, although the user's participation is diminished. The focus of these systems was to provide features to a single user, who could assemble teams multiple times, adjust the team's structures, or explore several team combinations [9, 92, 132]. Most of these articles were motivated to create expert teams and heterogeneous student groups. The research reviewed revealed the importance of providing algorithms that could quickly find the best solutions possible. In order to enable the user to change the team-formation criteria, these systems provided multiple control parameters and visualization components to iterate the team-assembly results [24, 107, 124]. Although assembling staffed teams can avoid team members' bias for similarity and familiarity, this team assembly configuration can present dissatisfaction and conflicts between the individual who creates the teams and the members that are assigned to them [95].

Finally, the increasing development of systems for augmented teams in the last decade—compared to the stable development of systems for staffed teams and optimized teams—reflects the high interest in developing solutions that help users choose the most suitable teammates. The current computational infrastructure, the growing use of artificial intelligence in socio-technical systems, and the relevance of user-centered designs foreshadow the creation of more organic teams that could achieve higher levels of heterogeneity. Not only do technologies automate tasks, support collaboration, or increase connectivity, but they can also augment user's decisions to address organizational problems [96]. We found multiple studies showing how systems can form efficient teams when users' feedback, choices, and teammate preferences take into account [72, 143, 191]. Incorporating systems that enable augmented teams will be relevant for crowdsourcing markets, gig economies, and organizations that need to assemble teams from large groups in real-time. This provides new research opportunities for the CSCW field to explore (i) whether systems can help users reach more suitable teammate candidates, (ii) find potential teammates who complement their skills (rather than being just similar to them), and (iii) reduce the cultural and language barriers between users who can work together as an outstanding team. As the research included in this category show, socio-technical systems can help people find the most appropriate team members based on their attributes and relationships by curating teammate options and using exponential computational power, such as Hackman and Katz envisioned [79].

6.2 Design implications

This paper provides multiple guidelines for future research and design implications. Several system's qualities can be examined from this taxonomy's four quadrants. We start from users' self-presentation (e.g., How do users present themselves on systems?) and systems' user representation (e.g., How do systems represent users?), which affect users' likelihood of being chosen by other users as teammates or being recommended by the system [202]. Systems' values and norms will affect teams assembled algorithmically. For example, systems' fairness determines whether users are assigned to particular teams without discrimination [151]. Also, the displayed transparency and accountability of these systems affect their trustworthiness and how users perceive systems' recommendations or the teams that they assemble [20]. Our taxonomy also reflects on the inclusion of minorities and discriminated groups, overcomes the obstacles for isolated users and newcomers face to be accepted by other users, and addresses the lack of diversity that these assembled groups may experience [2]. The intrinsic users' desire to work with similar and familiar people can lead to these issues, which are ultimately built upon users' prejudices. By adjusting users' agency and participation, these issues can be mitigated. However, systems' algorithms can exacerbate segregation patterns among users. For this reason, algorithms' criteria, methods, and results should be transparent so they can be held accountable [50]. Based on these implications, in Table 3 we propose design considerations and future research questions that envision team assembly on socio-technical systems.

Our taxonomy's two dimensions—users' agency and participation—provide practitioners, designers, developers, and scholars with a taxonomy that can be used to disentangle the decisions that bring teams to life, and their consequences on team composition, which are relevant for teams' performance, cohesion, and viability.

6.3 Limitations

Two main limitations in this paper must be considered. First, the operationalization of this taxonomy with only two dimensions can be considered a substantial limitation. Including other characteristics that have been studied in previous CSCW studies—such as affordances, awareness, scale, time, and location—are also essential for team-assembly processes enabled by socio-technical systems. Nevertheless, we believe these two dimensions shed the most light on the systems' influence on the decision-making processes to support team assembly, while previous CSCW taxonomies have already covered other dimensions.

Second, a scoping literature review conducted by only one coder affects the reliability of this classification process. Bias, misfits, and errors are less likely to occur by counting on multiple coders. We acknowledge that having two or more coders could have increased the reliability of the final analysis. Unfortunately, finding a second coder was not possible, given the circumstances during this paper's development. We addressed this issue in order to increase the classification's objectivity:

- To ensure search replicability, a member of our research group (who was not a co-author) peer-reviewed the search strategy using another computer and followed the Peer Review of Electronic Search Strategies (PRESS) checklist [135].
- All the authors of this paper reviewed the final list of articles to include and arrived at a consensus before proceeding with the full-data extraction.
- With the help of the coder's notes, the discussion held by all the authors enabled an insightful reflection to determine the articles' final classifications.
- We have made the results of our scoping review public to the research community in the Supplementary Materials, hoping that this analysis can be revisited, extended, and enhanced.

	Design considerations	Example of future research questions
<i>Optimized teams</i>	Users may not know what algorithms and criteria were used, and why they are assigned into specific teams.	How can systems provide more transparency about their decision-making process? How can users be aware and conscious of the information used by systems? How can systems provide higher levels of fairness?
<i>Staffed teams</i>	Users may not know who the team assembler is (e.g., manager, instructor, leader), and what criteria were used by the team assembler.	How can systems control users' information overload? How can systems address users' bias at the moment of searching for and selecting members? How can team members perceive fairness in this process?
<i>Self-assembled teams</i>	Users may choose candidates who are similar or familiar to them. Systems may highlight specific users' characteristics and information. Users' self-presentation may influence their likelihood of being chosen as a teammate.	How can users be encouraged to work with others who are not similar and familiar to them? How can diverse teams emerge in this process? How can systems help in avoiding the creation of segregated teams?
<i>Augmented teams</i>	Defining how system affordances will determine team assembly mechanisms.	How can systems learn from users' characteristics and relationships to assemble teams? What kind of feedback is required to update systems' team assembly mechanisms? How can users and systems be aware of their biases?

Table 3. From this taxonomy, we highlight four kinds of teams assembled in computer-mediated environments and offer takeaways for system developers as well as questions for future research.

As part of future work, charting and categorizing each one of the included articles with more than one coder would help identify themes and summarize the extensive literature on team assembly. We conducted this mapping exercise to contextualize this taxonomy based on the prior literature. Hence the lack of inter-coder reliability of this mapping exercise should not necessarily undermine the taxonomy presented in this paper.

7 CONCLUSION

As more technologies are being used to assemble teams, we need a better theoretical and empirical understanding of how socio-technical systems shape team-assembly processes, which will ultimately have consequences on teams' composition and users' experiences. Drawing upon a synthesis of multidisciplinary literature in team assembly, this paper offers a conceptual framework that sheds light on the social dimensions and challenges people face when using socio-technical systems to assemble teams. Building on prior research of the team-assembly processes and CSCW conceptual frameworks, we built a taxonomy based on two dimensions—users' agency and participation—that manifest as four types of teams enabled by socio-technical systems: self-assembled teams, optimized teams, staffed teams, and augmented teams. By conducting a systematic literature review, we mapped the current literature on team-assembly systems onto this four-quadrant taxonomy. While we found an overwhelming number of systems that assemble teams without considering

users' participation and agency, we discovered that in articles published in the last five years, there has been increasing research interest in combining the use of algorithms with users' participation to form augmented teams. Our taxonomy's dimensions enable system developers to reflect on the design components of socio-technical systems. We hope that this taxonomy provides guidelines for the design and use of systems that support team assembly, which have the potential to facilitate the formation of more effective, diverse, and viable teams.

ACKNOWLEDGMENTS

This material is based upon work supported by the National Science Foundation under grant SES-2021117, the Microsoft Research Dissertation Grant, and the National Institutes of Health under award number 1R01GM112938-01. We thank the anonymous reviewers for their highly constructive feedback and suggestions. We also thank the SONIC Lab members and Nicole E. Lipschultz for their help, feedback, and support.

REFERENCES

- [1] Mark S Ackerman. 2000. The Intellectual Challenge of CSCW: The Gap Between Social Requirements and Technical Feasibility. *Human-Computer Interaction* 15, 2-3 (Sept. 2000), 179–203.
- [2] Alessandro Acquisti and Christina Fong. 2019. An Experiment in Hiring Discrimination via Online Social Networks. *Manage. Sci.* (Nov. 2019).
- [3] J Afshar, A Haghighian Roudsari, and W Lee. 2020. Finding a Team of Skilled Players Based on Harmony. In *2020 IEEE International Conference on Big Data and Smart Computing (BigComp)*. 435–437.
- [4] Rakesh Agrawal, Behzad Golshan, and Evimaria Terzi. 2014. Grouping Students in Educational Settings. In *"Proceedings of the 20th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining" (KDD 2014)*. Association for Computing Machinery, New York, NY, USA, 1017–1026. <https://doi.org/10.1145/2623330.2623748>
- [5] L E Agustin-blas, S Salcedo-Sanz, E G Ortiz-Garcia, A Portilla-Figueras, A M Perez-Bellido, and S Jimenez-Fernandez. 2012. Team formation based on group technology: a hybrid grouping genetic algorithm approach. *IEEE Eng. Manage. Rev.* 40, 1 (2012), 30–43.
- [6] Mohammed Zuhair Al-Taie, Seifedine Kadry, and Adekunle Isiaka Obasa. 2018. Understanding expert finding systems: domains and techniques. *Social Network Analysis and Mining* 8, 1 (Aug. 2018), 57.
- [7] E Alhazmi and N Choudhury. 2019. Sign Prediction in Online Games. In *2019 IEEE International Conference on Big Data (Big Data)*. 5968–5970.
- [8] Essa Alhazmi, Sameera Horawalavithana, John Skvoretz, Jeremy Blackburn, and Adriana Iamnitchi. 2017. An Empirical Study on Team Formation in Online Games. In *Proceedings of the 2017 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining 2017 (ASONAM '17)*. Association for Computing Machinery, New York, NY, USA, 431–438.
- [9] Oznur Alkan, Elizabeth M Daly, and Inge Vejsbjerg. 2018. Opportunity Team Builder for Sales Teams (*23rd International Conference on Intelligent User Interfaces*). ACM, Tokyo, Japan.
- [10] Mohammad Y Allaho, Wang-Chien Lee, and De-Nian Yang. 2013. Staffing Open Collaborative Projects Based on the Degree of Acquaintance. In *Database Systems for Advanced Applications*. Springer Berlin Heidelberg, 385–400.
- [11] I Amarasinghe, D Hernández-Leo, and A Jonsson. 2017. Intelligent Group Formation in Computer Supported Collaborative Learning Scripts. In *2017 IEEE 17th International Conference on Advanced Learning Technologies (ICALT)*. 201–203.
- [12] Aris Anagnostopoulos, Luca Becchetti, Carlos Castillo, Aristides Gionis, and Stefano Leonardi. 2012. Online team formation in social networks. In *Proceedings of the 21st international conference on World Wide Web (WWW '12)*. Association for Computing Machinery, New York, NY, USA, 839–848.
- [13] Aris Anagnostopoulos, Carlos Castillo, Adriano Fazzone, Stefano Leonardi, and Evimaria Terzi. 2018. Algorithms for Hiring and Outsourcing in the Online Labor Market. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (KDD '18)*. Association for Computing Machinery, New York, NY, USA, 1109–1118.
- [14] Hilary Arksey and Lisa O'Malley. 2005. Scoping studies: towards a methodological framework. *International Journal of Social Research Methodology* 8, 1 (2005), 19–32. <https://doi.org/10.1080/1364557032000119616> arXiv:<https://doi.org/10.1080/1364557032000119616>
- [15] Holly Arrow, Joseph E McGrath, and Jennifer L Berdahl. 2000. *Small groups as complex systems: Formation, coordination, development, and adaptation*. Sage Publications.

- [16] B Ashenagar, N F Eghlidi, A Afshar, and A Hamzeh. 2015. Team formation in social networks based on local distance metric. In *2015 12th International Conference on Fuzzy Systems and Knowledge Discovery (FSKD)*. 946–952.
- [17] B Ashenagar, A Hamzeh, N F Eghlidi, and A Afshar. 2015. A fast approach for multi-objective team formation in social networks. In *2015 7th Conference on Information and Knowledge Technology (IKT)*. 1–6.
- [18] A Bahulkar, B K Szymanski, K Chan, and O Lizardo. 2018. Impact of Attributes on Group Formation. In *2018 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM)*. 1250–1257.
- [19] Trish Baker and Jill Clark. 2010. Cooperative learning – a double-edged sword: a cooperative learning model for use with diverse student groups. *Intercultural Education* 21, 3 (2010), 257–268. <https://doi.org/10.1080/14675981003760440> arXiv:<https://doi.org/10.1080/14675981003760440>
- [20] Catalin-Mihai Barbu. 2016. Increasing the Trustworthiness of Recommendations by Exploiting Social Media Sources. In *Proceedings of the 10th ACM Conference on Recommender Systems (RecSys '16)*. Association for Computing Machinery, New York, NY, USA, 447–450.
- [21] Alex Beutel, Jilin Chen, Tulsee Doshi, Hai Qian, Li Wei, Yi Wu, Lukasz Heldt, Zhe Zhao, Lichan Hong, Ed H. Chi, and Cristos Goodrow. 2019. Fairness in Recommendation Ranking through Pairwise Comparisons. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (KDD '19)*. Association for Computing Machinery, New York, NY, USA, 2212–2220. <https://doi.org/10.1145/3292500.3330745>
- [22] J Bobadilla, F Ortega, A Hernando, and A Gutiérrez. 2013. Recommender systems survey. *Knowledge-Based Systems* 46 (July 2013), 109–132.
- [23] Lorenzo Bossi, Stefano Braghin, Anwitaman Datta, and Alberto Trombetta. 2013. A Framework for Trust-Based Multidisciplinary Team Recommendation. In *User Modeling, Adaptation, and Personalization*. Springer Berlin Heidelberg, 38–50.
- [24] Alessandro Bozzon, Marco Brambilla, Stefano Ceri, Matteo Silvestri, and Giuliano Vesci. 2013. Choosing the right crowd: expert finding in social networks. In *Proceedings of the 16th International Conference on Extending Database Technology (EDBT '13)*. Association for Computing Machinery, New York, NY, USA, 637–648.
- [25] Donn Byrne. 1971. *The Attraction Paradigm*.
- [26] S S Caetano, D J Ferreira, C G Camilo, and M R Diedrich Ullmann. 2015. A hybrid genetic algorithm for group formation at workplace. In *2015 IEEE Congress on Evolutionary Computation (CEC)*. 3287–3295.
- [27] Jay B. Carson, Paul E. Tesluk, and Jennifer A. Marrone. 2007. Shared Leadership in Teams: An Investigation of Antecedent Conditions and Performance. *Academy of Management Journal* 50, 5 (2007), 1217–1234.
- [28] Traci Carte and Laku Chidambaram. 2004. A Capabilities-Based Theory of Technology Deployment in Diverse Teams: Leapfrogging the Pitfalls of Diversity and Leveraging Its Potential with Collaborative Technology. *Journal of the Association for Information Systems* 5, 11 (Dec. 2004), 4.
- [29] Douglas Castilho, Pedro O S Vaz de Melo, and Fabricio Benevenuto. 2017. The strength of the work ties. *Inf. Sci.* 375 (Jan. 2017), 155–170.
- [30] Fatih Cavdur, Asli Sebatli, Merve Kose-Kucuk, and Cagla Rodoplu. 2019. A two-phase binary-goal programming-based approach for optimal project-team formation. *J. Oper. Res. Soc.* 70, 4 (April 2019), 689–706.
- [31] Kenneth J. Chapman, Matthew Meuter, Dan Toy, and Lauren Wright. 2006. Can't We Pick our Own Groups? The Influence of Group Selection Method on Group Dynamics and Outcomes. *Journal of Management Education* 30, 4 (2006), 557–569.
- [32] M Cheatham and K Cleereman. 2006. Application of Social Network Analysis to Collaborative Team Formation. In *International Symposium on Collaborative Technologies and Systems (CTS'06)*. 306–311.
- [33] Roy Chen and Jie Gong. 2018. Can self selection create high-performing teams? *J. Econ. Behav. Organ.* 148 (April 2018), 20–33.
- [34] Y Chen, Y Lin, L Chu, Y Chiou, and T K Shih. 2015. Team formation for collaborative learning with social network consideration based on edX's online discussion board. In *2015 8th International Conference on Ubi-Media Computing (UMEDIA)*. 146–151.
- [35] H Y Chiang and B M T Lin. 2020. A Decision Model for Human Resource Allocation in Project Management of Software Development. *IEEE Access* 8 (2020), 38073–38081.
- [36] C E Christodouloupoulos and K A Papanikolaou. 2007. A Group Formation Tool in an E-Learning Context. In *19th IEEE International Conference on Tools with Artificial Intelligence (ICTAI 2007)*, Vol. 2. 117–123.
- [37] P I Ciptayani, K C Dewi, and I W B Sentana. 2016. Student grouping using adaptive genetic algorithm. In *2016 International Electronics Symposium (IES)*. 375–379.
- [38] S Cisneros-Cabrera, P Sampaio, and N Mehandjiev. 2018. A B2B Team Formation Microservice for Collaborative Manufacturing in Industry 4.0. In *2018 IEEE World Congress on Services (SERVICES)*. 37–38.
- [39] C Ciubuc, M Dascalu, S Trausan-Matu, and A Marhan. 2013. Forming Teams by Psychological Traits – An Effective Method of Developing Groups in an Educational Environment. In *2013 19th International Conference on Control Systems and Computer Science*. 597–602.

- [40] Barry E Collins and Harold Steere Guetzkow. 1964. *A social psychology of group processes for decision-making*. Wiley.
- [41] Noshir Contractor. 2013. Some assembly required: leveraging Web science to understand and enable team assembly. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences* 371, 1987 (2013), 20120385.
- [42] David Coyle, James Moore, Per Ola Kristensson, Paul Fletcher, and Alan Blackwell. 2012. I Did That! Measuring Users' Experience of Agency in Their Own Actions. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '12)*. Association for Computing Machinery, New York, NY, USA, 2025–2034.
- [43] Michelle Craig, Diane Horton, and François Pitt. 2010. Forming reasonably optimal groups: (FROG). In *Proceedings of the 16th ACM international conference on Supporting group work (GROUP '10)*. Association for Computing Machinery, New York, NY, USA, 141–150.
- [44] Armando Cruz, António Correia, Hugo Paredes, Benjamim Fonseca, Leonel Morgado, and Paulo Martins. 2012. Towards an Overarching Classification Model of CSCW and Groupware: A Socio-technical Perspective. In *Collaboration and Technology*. Springer Berlin Heidelberg, 41–56.
- [45] G A Dafoulas and L A Macaulay. 2001. Facilitating group formation and role allocation in software engineering groups. In *Proceedings ACS/IEEE International Conference on Computer Systems and Applications*. 352–359.
- [46] Karen Dale. 2005. Building a Social Materiality: Spatial and Embodied Politics in Organizational Control. *Organization* 12, 5 (Sept. 2005), 649–678.
- [47] Flavia Ernesto de Oliveira da Silva, Claudia L R Motta, Flávia Maria Santoro, and Carlo Emmanoel Tolla de Oliveira. 2009. A Social Matching Approach to Support Team Configuration. In *Groupware: Design, Implementation, and Use*. Springer Berlin Heidelberg, 49–64.
- [48] H De Silva, F Carrez, and K Moessner. 2011. Automated group formation in decentralised environments. In *2011 11th International Conference on Intelligent Systems Design and Applications*. 24–29.
- [49] Leslie A DeChurch, Raquel Asencio, Toshio Murase, Yun Huang, Anup Sawant, and Noshir S Contractor. 2013. The MyDreamTeam Builder. (2013).
- [50] Nicholas Diakopoulos. 2014. Algorithmic accountability reporting: On the investigation of black boxes. (2014).
- [51] Paul Dourish and Victoria Bellotti. 1992. Awareness and Coordination in Shared Workspaces. In *Proceedings of the 1992 ACM Conference on Computer-Supported Cooperative Work (CSCW '92)*. Association for Computing Machinery, New York, NY, USA, 107–114. <https://doi.org/10.1145/143457.143468>
- [52] E H Durfee, J C Boerkoel, and J Sleight. 2011. Comparing techniques for the semi-autonomous formation of expert teams. In *2011 International Conference on Collaboration Technologies and Systems (CTS)*. 351–358.
- [53] Edmund H Durfee, James C Boerkoel, and Jason Sleight. 2014. Using hybrid scheduling for the semi-autonomous formation of expert teams. *Future Gener. Comput. Syst.* 31 (Feb. 2014), 200–212.
- [54] Sarah Edney, Tim Olds, Jillian Ryan, Ronald Plotnikoff, Corneel Vandelandotte, Rachel Curtis, and Carol Maher. 2019. Do Birds of a Feather Flock Together Within a Team-Based Physical Activity Intervention? A Social Network Analysis. *J. Phys. Act. Health* (July 2019), 1–7.
- [55] Milad Eftekhari, Farnaz Ronaghi, and Amin Saberi. 2015. Team Formation Dynamics: A Study Using Online Learning Data. In *Proceedings of the 2015 ACM on Conference on Online Social Networks (COSN '15)*. Association for Computing Machinery, New York, NY, USA, 257–267.
- [56] Clarence A Ellis, Simon J Gibbs, and Gail Rein. 1991. Groupware: some issues and experiences. *Commun. ACM* (Jan. 1991).
- [57] F Z Fahmi and D Nurjanah. 2018. Group Formation Using Multi Objectives Ant Colony System for Collaborative Learning. In *2018 5th International Conference on Electrical Engineering, Computer Science and Informatics (EECSI)*. 696–702.
- [58] Alireza Farasat and Alexander G Nikolaev. 2016. Social structure optimization in team formation. *Comput. Oper. Res.* 74 (Oct. 2016), 127–142.
- [59] F Farhadi, E Hoseini, S Hashemi, and A Hamzeh. 2012. TeamFinder: A Co-clustering based Framework for Finding an Effective Team of Experts in Social Networks. In *2012 IEEE 12th International Conference on Data Mining Workshops*. 107–114.
- [60] F Farhadi, M Sorkhi, S Hashemi, and A Hamzeh. 2011. An Effective Expert Team Formation in Social Networks Based on Skill Grading. In *2011 IEEE 11th International Conference on Data Mining Workshops*. 366–372.
- [61] M Fathian, M Saei-Shahi, and A Makui. 2017. A New Optimization Model for Reliable Team Formation Problem Considering Experts' Collaboration Network. *IEEE Trans. Eng. Manage.* 64, 4 (Nov. 2017), 586–593.
- [62] Maryam Fazel-Zarandi, Hugh J Devlin, Yun Huang, and Noshir Contractor. 2011. Expert recommendation based on social drivers, social network analysis, and semantic data representation. In *Proceedings of the 2nd International Workshop on Information Heterogeneity and Fusion in Recommender Systems (HetRec '11)*. Association for Computing Machinery, New York, NY, USA, 41–48.

- [63] J Flores-Parra, M Castañón-Puga, R D Evans, R Rosales-Cisneros, and C Gaxiola-Pacheco. 2018. Towards Team Formation Using Belbin Role Types and a Social Networks Analysis Approach. In *2018 IEEE Technology and Engineering Management Conference (TEMSCON)*. 1–6.
- [64] Eureka Foong, Steven P Dow, Brian P Bailey, and Elizabeth M Gerber. 2017. Online Feedback Exchange: A Framework for Understanding the Socio-Psychological Factors. In *Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems*. ACM, 4454–4467.
- [65] Guo Freeman and Donghee Yvette Wohn. 2018. Understanding eSports Team Formation and Coordination. *Computer Supported Cooperative Work-the Journal of Collaborative Computing* 27, 3-6 (Dec. 2018), 1019–1050.
- [66] R Fuller. 2019. Functional Organization of Software Groups Considered Harmful. In *2019 IEEE/ACM International Conference on Software and System Processes (ICSSP)*. 120–124.
- [67] Susan R. Fussell, Robert E. Kraut, F. Javier Lerch, William L. Scherlis, Matthew M. McNally, and Jonathan J. Cadiz. 1998. Coordination, Overload and Team Performance: Effects of Team Communication Strategies. In *Proceedings of the 1998 ACM Conference on Computer Supported Cooperative Work (CSCW '98)*. Association for Computing Machinery, New York, NY, USA, 275–284. <https://doi.org/10.1145/289444.289502>
- [68] Diego Gómez-Zarà, Silvia Andreoli, Leslie A DeChurch, and Noshir S Contractor. 2019. Discovering collaborators online: Assembling interdisciplinary teams online at an Argentinian University. *Cuadernos.info* 44 (2019). <https://doi.org/10.7764/cdi.44.1575>
- [69] Diego Gómez-Zarà, Mengzi Guo, Leslie A. DeChurch, and Noshir Contractor. 2020. The Impact of Displaying Diversity Information on the Formation of Self-Assembling Teams. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems (CHI '20)*. Association for Computing Machinery, New York, NY, USA, 1–15. <https://doi.org/10.1145/3313831.3376654>
- [70] Diego Gómez-Zarà, Matthew Paras, Marlon Twyman, Jacqueline N. Lane, Leslie A. DeChurch, and Noshir S. Contractor. 2019. Who Would You Like to Work With?. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems (CHI '19)*. Association for Computing Machinery, New York, NY, USA, 1–15. <https://doi.org/10.1145/3290605.3300889>
- [71] Joseph A Gonzales, Casey Fiesler, and Amy Bruckman. 2015. Towards an Appropriable CSCW Tool Ecology: Lessons from the Greatest International Scavenger Hunt the World Has Ever Seen. In *Proceedings of the 18th ACM Conference on Computer Supported Cooperative Work & Social Computing (CSCW '15)*. Association for Computing Machinery, New York, NY, USA, 946–957.
- [72] Palash Goyal, Anna Sapienza, and Emilio Ferrara. 2018. Recommending Teammates with Deep Neural Networks. In *Proceedings of the 29th on Hypertext and Social Media (HT '18)*. Association for Computing Machinery, New York, NY, USA, 57–61.
- [73] Sabine Graf and Rahel Bekele. 2006. Forming Heterogeneous Groups for Intelligent Collaborative Learning Systems with Ant Colony Optimization. In *Intelligent Tutoring Systems*. Springer Berlin Heidelberg, 217–226.
- [74] Catherine Grevet. 2013. Combating Homophily through Design. In *Proceedings of the 2013 Conference on Computer Supported Cooperative Work Companion (CSCW '13)*. Association for Computing Machinery, New York, NY, USA, 57–60.
- [75] J Grudin. 1994. Computer-supported cooperative work: history and focus. *Computer* 27, 5 (May 1994), 19–26.
- [76] Roger Guimerà, Brian Uzzi, Jarrett Spiro, and Luís A Nunes Amaral. 2005. Team assembly mechanisms determine collaboration network structure and team performance. *Science* 308, 5722 (April 2005), 697–702.
- [77] Carl Gutwin and Saul Greenberg. 2002. A Descriptive Framework of Workspace Awareness for Real-Time Groupware. *Comput. Support. Coop. Work* 11, 3 (Sept. 2002), 411–446.
- [78] Justin D Hackett and Michael A Hogg. 2014. The diversity paradox: when people who value diversity surround themselves with like-minded others. *J. Appl. Soc. Psychol.* 44, 6 (June 2014), 415–422.
- [79] J Richard Hackman and Nancy Katz. 2010. Group behavior and performance. , 1208–1251 pages.
- [80] Jungpil Hahn, Jae Yun Moon, and Chen Zhang. 2008. Emergence of New Project Teams from Open Source Software Developer Networks: Impact of Prior Collaboration Ties. *Information Systems Research* 19, 3 (Sept. 2008), 369–391.
- [81] A Hamrouni, H Ghazzai, T Alelyani, and Y Massoud. 2019. A Stochastic Team Formation Approach for Collaborative Mobile Crowdsourcing. In *2019 31st International Conference on Microelectronics (ICM)*. 66–69.
- [82] Alexa M. Harris, Diego Gómez-Zarà, Leslie A. DeChurch, and Noshir S. Contractor. 2019. Joining Together Online: The Trajectory of CSCW Scholarship on Group Formation. *Proc. ACM Hum.-Comput. Interact.* 3, CSCW, Article 148 (Nov. 2019), 27 pages. <https://doi.org/10.1145/3359250>
- [83] David M Hart. 2014. Founder nativity, founding team formation, and firm performance in the U.S. high-tech sector. *International Entrepreneurship and Management Journal* 10, 1 (March 2014), 1–22.
- [84] Emily M Hastings, Farnaz Jahanbakhsh, Karrie Karahalios, Darko Marinov, and Brian P Bailey. 2018. Structure or Nurture? The Effects of Team-Building Activities and Team Composition on Team Outcomes. *Proc. ACM Hum.-Comput. Interact.* 2, CSCW (Nov. 2018), 1–21.

- [85] Tyson R Henry. 2013. Creating effective student groups: an introduction to groupformation.org. In *Proceeding of the 44th ACM technical symposium on Computer science education (SIGCSE '13)*. Association for Computing Machinery, New York, NY, USA, 645–650.
- [86] Pamela J Hinds, Kathleen M Carley, David Krackhardt, and Doug Wholey. 2000. Choosing work group members: Balancing similarity, competence, and familiarity. *Organ. Behav. Hum. Decis. Process.* 81, 2 (2000), 226–251.
- [87] T Ho, S J Shyu, F Wang, and C T Li. 2009. Composing High-Heterogeneous and High-Interaction Groups in Collaborative Learning with Particle Swarm Optimization. In *2009 WRI World Congress on Computer Science and Information Engineering*, Vol. 4. 607–611.
- [88] Michael A Hogg and Deborah I Terry. 2000. Social identity and self-categorization processes in organizational contexts. *Acad. Manage. Rev.* 25 (2000), 121–140.
- [89] J Hong and L Leifer. 1995. Using the WWW to support Project-Team formation. In *Proceedings Frontiers in Education 1995 25th Annual Conference. Engineering Education for the 21st Century*, Vol. 1. 2c5.1–2c5.5 vol.1.
- [90] Sujin K Horwitz and Irwin B Horwitz. 2007. The Effects of Team Diversity on Team Outcomes: A Meta-Analytic Review of Team Demography. *J. Manage.* 33, 6 (Dec. 2007), 987–1015.
- [91] Y Huang, M Zhu, J Wang, N Pathak, C Shen, B Keegan, D Williams, and N Contractor. 2009. The Formation of Task-Oriented Groups: Exploring Combat Activities in Online Games. In *2009 International Conference on Computational Science and Engineering*, Vol. 4. 122–127.
- [92] R Hübscher. 2010. Assigning Students to Groups Using General and Context-Specific Criteria. *IEEE Trans. Learn. Technol.* 3, 3 (July 2010), 178–189.
- [93] Daniel R Ilgen, John R Hollenbeck, Michael Johnson, and Dustin Jundt. 2005. Teams in organizations: from input-process-output models to IMOI models. *Annu. Rev. Psychol.* 56 (2005), 517–543.
- [94] D Jagadish. 2014. Grouping in collaborative e-learning environment based on interaction among students. In *2014 International Conference on Recent Trends in Information Technology*. 1–5.
- [95] Farnaz Jahanbakhsh, Wai-Tat Fu, Karrie Karahalios, Darko Marinov, and Brian Bailey. 2017. You Want Me to Work with Who?: Stakeholder Perceptions of Automated Team Formation in Project-based Courses. *ACM*, 3201–3212.
- [96] Hemant Jain, Balaji Padmanabhan, Paul A. Pavlou, and Raghu T. Santanam. 2018. Call for Papers—Special Issue of Information Systems Research—Humans, Algorithms, and Augmented Intelligence: The Future of Work, Organizations, and Society. *Information Systems Research* 29, 1 (2018), 250–251.
- [97] M M Jati Wijaya, D Wahyu Utomo, and D Kurniawan. 2019. Implementing Dynamic Group Formation in Web-Based Collaborative Learning for High School. In *2019 International Seminar on Research of Information Technology and Intelligent Systems (ISRITI)*. 528–533.
- [98] Robert Johansen. 1988. *Groupware: Computer support for business teams*. The Free Press.
- [99] N. Joseph, N. Pradeesh, S. Chatterjee, and K. Bijlani. 2017. A novel approach for group formation in collaborative learning using learner preferences. In *2017 International Conference on Advances in Computing, Communications and Informatics (ICACCI)*. 1564–1568.
- [100] Julio Juárez and Carlos A Brihueza. 2018. A multi-objective formulation of the team formation problem in social networks: preliminary results. In *Proceedings of the Genetic and Evolutionary Computation Conference (GECCO '18)*. Association for Computing Machinery, New York, NY, USA, 261–268.
- [101] K Kamel, Z Al Aghbari, and I Kamel. 2014. Realistic team formation using navigation and homophily. In *2014 International Conference on Big Data and Smart Computing (BIGCOMP)*. 197–203.
- [102] K Kamel, N Tubaiz, O AlKoky, and Z AlAghbari. 2011. Toward forming an effective team using social network. In *2011 International Conference on Innovations in Information Technology*. 308–312.
- [103] Thivya Kandappu, Archan Misra, and Randy Tandriansyah. 2017. Collaboration Trumps Homophily in Urban Mobile Crowdsourcing. In *Proceedings of the 2017 ACM Conference on Computer Supported Cooperative Work and Social Computing (CSCW '17)*. Association for Computing Machinery, New York, NY, USA, 902–915.
- [104] Karduck. 1994. TeamBuilder—a consistently decentralized hyper-information system for team formation. In *1994 Proceedings of IEEE International Conference on Multimedia Computing and Systems*. 556–561.
- [105] Achim Karduck. 1994. TeamBuilder: a CSCW tool for identifying expertise and team formation. *Comput. Commun.* 17, 11 (Nov. 1994), 777–787.
- [106] Mehdi Kargar and Aijun An. 2011. Discovering top-k teams of experts with/without a leader in social networks. In *Proceedings of the 20th ACM international conference on Information and knowledge management (CIKM '11)*. Association for Computing Machinery, New York, NY, USA, 985–994.
- [107] M Kargar and A An. 2011. TeamExp: Top-k Team Formation in Social Networks. In *2011 IEEE 11th International Conference on Data Mining Workshops*. 1231–1234.
- [108] Nancy Katz, David Lazer, Holly Arrow, and Noshir Contractor. 2005. The network perspective on small groups. *Theories of small groups: Interdisciplinary perspectives* (2005), 277–312.

- [109] Brian Keegan, Darren Gergle, and Noshir Contractor. 2012. *Do editors or articles drive collaboration? Multilevel statistical network analysis of wikipedia coauthorship*. ACM, New York, USA, 427–436.
- [110] Jooyeon Kim, Brian C Keegan, Sungjoon Park, and Alice Oh. 2016. The Proficiency-Congruency Dilemma: Virtual Team Design and Performance in Multiplayer Online Games. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems (CHI '16)*. Association for Computing Machinery, New York, NY, USA, 4351–4365.
- [111] Young Ji Kim, David Engel, Anita Williams Woolley, Jeffrey Yu-Ting Lin, Naomi McArthur, and Thomas W. Malone. 2017. What Makes a Strong Team? Using Collective Intelligence to Predict Team Performance in League of Legends. In *Proceedings of the 2017 ACM Conference on Computer Supported Cooperative Work and Social Computing (CSCW '17)*. Association for Computing Machinery, New York, NY, USA, 2316–2329. <https://doi.org/10.1145/2998181.2998185>
- [112] Aniket Kittur, Jeffrey V Nickerson, Michael Bernstein, Elizabeth Gerber, Aaron Shaw, John Zimmerman, Matt Lease, and John Horton. 2013. The future of crowd work. In *Proceedings of the 2013 conference on Computer supported cooperative work*. ACM, 1301–1318.
- [113] Ž Komlenov, Z Budimac, M Ivanović, and K Bothe. 2013. Team formation process automatization. In *2013 IEEE Global Engineering Education Conference (EDUCON)*. 744–750.
- [114] Johannes Konert, Dmitrij Burlak, and Ralf Steinmetz. 2014. The Group Formation Problem: An Algorithmic Approach to Learning Group Formation. In *Open Learning and Teaching in Educational Communities*. Springer International Publishing, 221–234.
- [115] Steve W.J. Kozlowski and Daniel R. Ilgen. 2006. Enhancing the Effectiveness of Work Groups and Teams. *Psychological Science in the Public Interest* 7, 3 (2006), 77–124. <https://doi.org/10.1111/j.1529-1006.2006.00030.x> arXiv:<https://doi.org/10.1111/j.1529-1006.2006.00030.x> PMID: 26158912.
- [116] Robert E Kraut and Andrew T Fiore. 2014. The role of founders in building online groups. In *Proceedings of the 17th ACM conference on Computer supported cooperative work & social computing (CSCW '14)*. Association for Computing Machinery, New York, NY, USA, 722–732.
- [117] Theodoros Lappas, Kun Liu, and Evimaria Terzi. 2009. Finding a Team of Experts in Social Networks. In *Proceedings of the 15th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD '09)*. Association for Computing Machinery, New York, NY, USA, 467–476. <https://doi.org/10.1145/1557019.1557074>
- [118] Thomas Largillier and Julita Vassileva. 2012. Using Collective Trust for Group Formation. In *Collaboration and Technology*. Springer Berlin Heidelberg, 137–144.
- [119] Roberto Latorre and Javier Suárez. 2017. Measuring social networks when forming information system project teams. *J. Syst. Softw.* 134 (Dec. 2017), 304–323.
- [120] Richard A Layton, Misty L Loughry, Matthew W Ohland, and George D Riccio. 2010. Design and validation of a web-based system for assigning members to teams using instructor-specified criteria. *Advances in Engineering Education* 2, 1 (2010), n1.
- [121] Charlotte P Lee and Drew Paine. 2015. From the matrix to a model of coordinated action (MoCA): a conceptual framework of and for CSCW. In *Proceedings of the 18th ACM Conference on Computer Supported Cooperative Work & Social Computing*. dl.acm.org, 179–194.
- [122] Paul M Leonardi. 2012. Materiality, sociomateriality, and socio-technical systems: What do these terms mean? How are they different? Do we need them. *Materiality and organizing: Social interaction in a technological world* 25 (2012).
- [123] C Li and M Shan. 2010. Team Formation for Generalized Tasks in Expertise Social Networks. In *2010 IEEE Second International Conference on Social Computing*. 9–16.
- [124] C Li and M Shan. 2013. X2-Search: Contextual Expert Search in Social Networks. In *2013 Conference on Technologies and Applications of Artificial Intelligence*. 176–181.
- [125] S Lin, Z Luo, Y Yu, and M Pan. 2013. Effective Team Formation in Workflow Process Context. In *2013 International Conference on Cloud and Green Computing*. 508–513.
- [126] Q Liu, T Luo, R Tang, and S Bressan. 2015. An efficient and truthful pricing mechanism for team formation in crowdsourcing markets. In *2015 IEEE International Conference on Communications (ICC)*. 567–572.
- [127] S Liu, M Joy, and N Griffiths. 2013. An Exploratory Study on Group Formation Based on Learning Styles. In *2013 IEEE 13th International Conference on Advanced Learning Technologies*. 95–99.
- [128] Gustavo Lopez and Luis A. Guerrero. 2017. Awareness Supporting Technologies Used in Collaborative Systems: A Systematic Literature Review. In *Proceedings of the 2017 ACM Conference on Computer Supported Cooperative Work and Social Computing (CSCW '17)*. Association for Computing Machinery, New York, NY, USA, 808–820. <https://doi.org/10.1145/2998181.2998281>
- [129] Ioanna Lykourantzou, Angeliki Antoniou, Yannick Naudet, and Steven P. Dow. 2016. Personality Matters: Balancing for Personality Types Leads to Better Outcomes for Crowd Teams. (2016), 260–273.
- [130] Ioanna Lykourantzou, Robert E Kraut, and Steven P Dow. 2017. Team Dating Leads to Better Online Ad Hoc Collaborations. In *Proceedings of the 2017 ACM Conference on Computer Supported Cooperative Work and Social Computing (CSCW '17)*. Association for Computing Machinery, New York, NY, USA, 2330–2343.

- [131] Lucas Machado and Kostas Stefanidis. 2019. Fair Team Recommendations for Multidisciplinary Projects. In *IEEE/WIC/ACM International Conference on Web Intelligence (WI '19)*. Association for Computing Machinery, New York, NY, USA, 293–297.
- [132] A Mahmood, M A Choudhary, and A H Qurashi. 2016. Redesigning the way teams work smarter using comprehensive assessment of team member effectiveness (CATME). In *2016 Portland International Conference on Management of Engineering and Technology (PICMET)*. 1713–1718.
- [133] Anirban Majumder, Samik Datta, and K V M Naidu. 2012. Capacitated team formation problem on social networks. In *Proceedings of the 18th ACM SIGKDD international conference on Knowledge discovery and data mining (KDD '12)*. Association for Computing Machinery, New York, NY, USA, 1005–1013.
- [134] Felip Manyà, Santiago Negrete, Carme Roig, and Joan Ramon Soler. 2017. A MaxSAT-Based Approach to the Team Composition Problem in a Classroom. In *Autonomous Agents and Multiagent Systems*. Springer International Publishing, 164–173.
- [135] Jessie McGowan, Margaret Sampson, Douglas M. Salzwedel, Elise Cogo, Vicki Foerster, and Carol Lefebvre. 2016. PRESS Peer Review of Electronic Search Strategies: 2015 Guideline Statement. *Journal of Clinical Epidemiology* 75 (2016), 40 – 46. <https://doi.org/10.1016/j.jclinepi.2016.01.021>
- [136] Joseph E McGrath. 1984. *Groups: Interaction and performance*. Vol. 14. Prentice-Hall Englewood Cliffs, NJ.
- [137] Joseph E McGrath, Holly Arrow, and Jennifer L Berdahl. 2000. The Study of Groups: Past, Present, and Future. *Pers. Soc. Psychol. Rev.* 4, 1 (Feb. 2000), 95–105.
- [138] Rafael Duque Medina, Domingo Gómez-Pérez, Alicia Nieto-Reyes, and Crescencio Bravo Santos. 2013. A method to form learners groups in computer-supported collaborative learning systems. In *Proceedings of the First International Conference on Technological Ecosystem for Enhancing Multiculturality (TEEM '13)*. Association for Computing Machinery, New York, NY, USA, 261–266.
- [139] Dinesh Mehta, Tina Kouri, and Irene Polycarpou. 2012. Forming project groups while learning about matching and network flows in algorithms. In *Proceedings of the 17th ACM annual conference on Innovation and technology in computer science education (ITiCSE '12)*. Association for Computing Machinery, New York, NY, USA, 40–45.
- [140] Antonio S. Mello and Martin E. Ruckes. 2006. Team Composition. *The Journal of Business* 79, 3 (2006), 1019–1039. <http://www.jstor.org/stable/10.1086/500668>
- [141] Y M Méndez-Vázquez and D A Nembhard. 2017. Worker grouping and assignment for serial and parallel manufacturing systems considering workers' heterogeneity and task complexity. In *2017 Winter Simulation Conference (WSC)*. 4348–4359.
- [142] Fabrizio Messina, Giuseppe Pappalardo, Domenico Rosaci, Corrado Santoro, and Giuseppe M L Sarné. 2013. A Distributed Agent-Based Approach for Supporting Group Formation in P2P e-Learning. In *AI*IA 2013: Advances in Artificial Intelligence*. Springer International Publishing, 312–323.
- [143] D Meulbroek, D Ferguson, M Ohland, and F Berry. 2019. Forming More Effective Teams Using CATME TeamMaker and the Gale-Shapley Algorithm. In *2019 IEEE Frontiers in Education Conference (FIE)*. 1–5.
- [144] S Mishra, A Yadav, and A S Sairam. 2019. Worker Selection in Crowd-sourced Platforms using Non-dominated Sorting. In *TENCON 2019 - 2019 IEEE Region 10 Conference (TENCON)*. 41–45.
- [145] David Moher, Alessandro Liberati, Jennifer Tetzlaff, Douglas G Altman, Prisma Group, et al. 2009. Preferred reporting items for systematic reviews and meta-analyses: the PRISMA statement. *PLoS medicine* 6, 7 (2009), e1000097.
- [146] Richard L Moreland, JM Levine, and ML Wingert. 2013. Creating the ideal group: Composition effects at work. *Understanding group behavior* 2 (2013), 11–35.
- [147] Benedikt Morschheuser, Alexander Maedche, and Dominic Walter. 2017. Designing Cooperative Gamification. In *Proceedings of the 2017 ACM Conference on Computer Supported Cooperative Work and Social Computing*. ACM.
- [148] Amir Mujkanovic and Andreas Bollin. 2016. Improving learning outcomes through systematic group reformation: the role of skills and personality in software engineering education. In *Proceedings of the 9th International Workshop on Cooperative and Human Aspects of Software Engineering (CHASE '16)*. Association for Computing Machinery, New York, NY, USA, 97–103.
- [149] A Mujkanovic, D Lowe, K Willey, and C Guetl. 2012. Unsupervised learning algorithm for adaptive group formation: Collaborative learning support in remotely accessible laboratories. In *International Conference on Information Society (i-Society 2012)*. 50–57.
- [150] Satyam Mukherjee, Yun Huang, Julia Neidhardt, Brian Uzzi, and Noshir Contractor. 2019. Prior shared success predicts victory in team competitions. *Nature human behaviour* 3, 1 (2019), 74–81.
- [151] Deirdre K Mulligan, Joshua A Kroll, Nitin Kohli, and Richmond Y Wong. 2019. This Thing Called Fairness: Disciplinary Confusion Realizing a Value in Technology. *Proc. ACM Hum. -Comput. Interact.* 3, CSCW (Nov. 2019).
- [152] Y Najafloo and K Bubendorfer. 2017. In Pursuit of the Wisest: Building Cost-Effective Teams of Experts. In *2017 IEEE 13th International Conference on e-Science (e-Science)*. 158–167.

- [153] Evangelos Niforatos, Athanasios Vourvopoulos, and Marc Langheinrich. 2017. Amplifying Human Cognition: Bridging the Cognitive Gap between Human and Machine. In *Proceedings of the 2017 ACM International Joint Conference on Pervasive and Ubiquitous Computing and Proceedings of the 2017 ACM International Symposium on Wearable Computers (UbiComp '17)*. Association for Computing Machinery, New York, NY, USA, 673–680.
- [154] M Niveditha, G Swetha, U Poornima, and R Senthilkumar. 2017. A genetic approach for tri-objective optimization in team formation. In *2016 Eighth International Conference on Advanced Computing (ICoAC)*. 123–130.
- [155] Safiya Umoja Noble. 2018. *Algorithms of oppression: How search engines reinforce racism*. NYU Press.
- [156] D Nurjanah, K Dewanto, and F D Sari. 2017. Homogeneous group formation in collaborative learning using fuzzy C-means. In *2017 IEEE 6th International Conference on Teaching, Assessment, and Learning for Engineering (TALE)*. 74–79.
- [157] A Ochirbat, M Namsraidorj, and W Y Hwang. 2014. Small K-Teams Recommendation in Social Learning Networks. In *2014 7th International Conference on Ubi-Media Computing and Workshops*. 286–291.
- [158] Chinasa Odo, Judith Masthoff, and Nigel Beacham. 2019. Group Formation for Collaborative Learning. In *Artificial Intelligence in Education*. Springer International Publishing, 206–212.
- [159] A Ounnas, H C Davis, and D E Millard. 2007. Towards Semantic Group Formation. In *Seventh IEEE International Conference on Advanced Learning Technologies (ICALT 2007)*. 825–827.
- [160] Asma Ounnas, David E Millard, and Hugh C Davis. 2007. A metrics framework for evaluating group formation. In *Proceedings of the 2007 international ACM conference on Supporting group work (GROUP '07)*. Association for Computing Machinery, New York, NY, USA, 221–224.
- [161] Zizi Papacharissi. 2009. The virtual geographies of social networks: a comparative analysis of Facebook, LinkedIn and ASmallWorld. *New Media & Society* 11, 1-2 (2009), 199–220.
- [162] Victor M Ruiz Penichet, Ismael Marin, Jose A Gallud, María Dolores Lozano, and Ricardo Tesoriero. 2007. A Classification Method for CSCW Systems. *Electronic Notes in Theoretical Computer Science* 168 (Feb. 2007), 237–247.
- [163] Anthony T Pescosolido. 2002. Emergent leaders as managers of group emotion. *The Leadership Quarterly* 13, 5 (2002), 583 – 599. Emotions and Leadership.
- [164] M Petrov and A Kashevnik. 2018. Expert Group Formation for Task Performing: Competence-Based Method and Implementation. In *2018 23rd Conference of Open Innovations Association (FRUCT)*. 315–320.
- [165] N Pobiedina, J Neidhardt, M d. C. Calatrava Moreno, L Grad-Gyenge, and H Werthner. 2013. On Successful Team Formation: Statistical Analysis of a Multiplayer Online Game. In *2013 IEEE 15th Conference on Business Informatics*. 55–62.
- [166] W. A. C. Prashandi and A. Kirupananda. 2019. Automation of Team Formation in Software Development Projects in an Enterprise: What Needs to Improve?. In *2019 International Conference on Advanced Computing and Applications (ACOMP)*. 16–22.
- [167] O N Pratiwi, B Rahardjo, and S H Supangkat. 2017. Clustering multiple mix data type for automatic grouping of student system. In *2017 International Conference on Information Technology Systems and Innovation (ICITSI)*. 172–176.
- [168] Irene Rae, Gina Venolia, John C Tang, and David Molnar. 2015. A Framework for Understanding and Designing Telepresence. In *Proceedings of the 18th ACM Conference on Computer Supported Cooperative Work & Social Computing*.
- [169] Syama Sundar Rangapuram, Thomas Bühler, and Matthias Hein. 2013. Towards realistic team formation in social networks based on densest subgraphs. In *Proceedings of the 22nd international conference on World Wide Web (WWW '13)*. Association for Computing Machinery, New York, NY, USA, 1077–1088.
- [170] Ray Reagans and Ezra W. Zuckerman. 2001. Networks, Diversity, and Productivity: The Social Capital of Corporate R&D Teams. *Organization Science* 12, 4 (2001), 502–517.
- [171] Daniela Retelny, Sébastien Robaszkiewicz, Alexandra To, Walter S. Lasecki, Jay Patel, Negar Rahmati, Tulsee Doshi, Melissa Valentine, and Michael S. Bernstein. 2014. Expert Crowdsourcing with Flash Teams. In *Proceedings of the 27th Annual ACM Symposium on User Interface Software and Technology (UIST '14)*. Association for Computing Machinery, New York, NY, USA, 75–85. <https://doi.org/10.1145/2642918.2647409>
- [172] Lionel Robert and Daniel M Romero. 2015. Crowd Size, Diversity and Performance. *ACM*, 1379–1382.
- [173] Sérgio Rodrigues, Jonice Oliveira, and Jano M de Souza. 2006. Recommendation for Team and Virtual Community Formations Based on Competence Mining. In *Computer Supported Cooperative Work in Design II*. Springer Berlin Heidelberg, 365–374.
- [174] Shayna A Rusticus and Brandon J Justus. 2019. Comparing Student- and Teacher-Formed Teams on Group Dynamics, Satisfaction, and Performance. *Small Group Research* 50, 4 (Aug. 2019), 443–457.
- [175] Eduardo Salas, C. Shawn Burke, and Janis A. Cannon-Bowers. 2000. Teamwork: emerging principles. *International Journal of Management Reviews* 2, 4 (2000), 339–356. <https://doi.org/10.1111/1468-2370.00046> arXiv:<https://onlinelibrary.wiley.com/doi/pdf/10.1111/1468-2370.00046>
- [176] Niloufar Salehi and Michael S Bernstein. 2018. Hive: Collective Design Through Network Rotation. *Proc. ACM Hum.-Comput. Interact.* 2, CSCW (Nov. 2018), 151:1–151:26.

- [177] Niloufar Salehi, Andrew McCabe, Melissa Valentine, and Michael Bernstein. 2017. Huddler: Convening Stable and Familiar Crowd Teams Despite Unpredictable Availability. (2017), 1700–1713.
- [178] Sreecharan Sankaranarayanan, Cameron Dashti, Chris Bogart, Xu Wang, Majd Sakr, and Carolyn Penstein Rosé. 2018. When Optimal Team Formation Is a Choice - Self-selection Versus Intelligent Team Formation Strategies in a Large Online Project-Based Course. In *Artificial Intelligence in Education*. Springer International Publishing, 518–531.
- [179] Djoko Sigit Sayogo, Jing Zhang, and Theresa A Pardo. 2011. Evaluating the Structure of Cross-Boundary Digital Government Research Collaboration: A Social Network Approach. In *Proceedings of the 12th Annual International Digital Government Research Conference: Digital Government Innovation in Challenging Times (dg.o '11)*. Association for Computing Machinery, New York, NY, USA, 64–73.
- [180] Kjeld Schmidt and Tom Rodden. 1996. Chapter 11 Putting it all together: Requirements for a CSCW platform. In *Human Factors in Information Technology*, Dan Shapiro, Michael Tauber, and Roland Traunmüller (Eds.). Vol. 12. North-Holland, 157–175.
- [181] Dylan D Schmorrow. 2005. *Foundations of augmented cognition*. CRC Press.
- [182] Joseph Seering, Felicia Ng, Zheng Yao, and Geoff Kaufman. 2018. Applications of Social Identity Theory to Research and Design in Computer-Supported Cooperative Work. *Proceedings of the ACM on Human-Computer Interaction* 2, CSCW (2018), 201.
- [183] K Selvarajah, P M Zadeh, Z Kobti, M Kargar, M T Ishraque, and K Pfaff. 2018. Team Formation in Community-Based Palliative Care. In *2018 Innovations in Intelligent Systems and Applications (INISTA)*. 1–7.
- [184] Avinash Sharma, Jyotirmaya Mahapatra, Asmita Metrewar, Abhishek Tripathi, and Partha Dutta. 2015. A Team Hiring Solution Based on Graph-Based Modelling of Human Resource Entities. In *Human Interface and the Management of Information. Information and Knowledge Design*. Springer International Publishing, 115–126.
- [185] Chih-Ya Shen, Hong-Han Shuai, De-Nian Yang, Yi-Feng Lan, Wang-Chien Lee, Philip S Yu, and Ming-Syan Chen. 2015. Forming Online Support Groups for Internet and Behavior Related Addictions. In *Proceedings of the 24th ACM International on Conference on Information and Knowledge Management (CIKM '15)*. Association for Computing Machinery, New York, NY, USA, 163–172.
- [186] Timothy K Shih, W K T M Gunarathne, Ankhtuya Ochirbat, and Huang-Ming Su. 2018. Grouping Peers Based on Complementary Degree and Social Relationship using Genetic Algorithm. *ACM Trans. Internet Technol.* 19, 1 (Oct. 2018), 1–29.
- [187] Karina Kohl Silveira and Rafael Prikladnicki. 2019. A Systematic Mapping Study of Diversity in Software Engineering: A Perspective from the Agile Methodologies. In *Proceedings of the 12th International Workshop on Cooperative and Human Aspects of Software Engineering (CHASE '19)*. IEEE Press, Montreal, Quebec, Canada, 7–10.
- [188] T Sinha. 2014. Together we stand, Together we fall, Together we win: Dynamic team formation in massive open online courses. In *The Fifth International Conference on the Applications of Digital Information and Web Technologies (ICADIWT 2014)*. 107–112.
- [189] I Srba and M Bielikova. 2015. Dynamic Group Formation as an Approach to Collaborative Learning Support. *IEEE Trans. Learn. Technol.* 8, 2 (April 2015), 173–186.
- [190] H Colleen Stuart, Laura Dabbish, Sara Kiesler, Peter Kinnaird, and Ruogu Kang. 2012. Social transparency in networked information exchange: a theoretical framework. In *Proceedings of the ACM 2012 conference on Computer Supported Cooperative Work*. dl.acm.org, 451–460.
- [191] Anon Sukstienwong, Jirawat Ruenanukul, and Kantapon Limsrisakul. 2019. Development of Web-based Application for Forming an Optimized Group of Buyers by Genetic Algorithm. In *Proceedings of the 2019 3rd International Conference on E-Society, E-Education and E-Technology (ICSET 2019)*. Association for Computing Machinery, New York, NY, USA, 16–20.
- [192] S. Shyam Sundar and Jinyoung Kim. 2019. Machine Heuristic: When We Trust Computers More than Humans with Our Personal Information. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems (CHI '19)*. Association for Computing Machinery, New York, NY, USA, 1–9. <https://doi.org/10.1145/3290605.3300768>
- [193] G S Tacadao and R P S T S J. 2015. A Generic Model for the Group Formation Problem Using Constraint Logic Programming. In *2015 IEEE 15th International Conference on Advanced Learning Technologies*. 307–308.
- [194] Y Teng and C Tai. 2019. Forming the Best Team for a Composite Competition. In *2019 Twelfth International Conference on Ubi-Media Computing (Ubi-Media)*. 267–272.
- [195] David Tranfield, David Denyer, and Palminder Smart. 2003. Towards a Methodology for Developing Evidence-Informed Management Knowledge by Means of Systematic Review. *British Journal of Management* 14, 3 (2003), 207–222. <https://doi.org/10.1111/1467-8551.00375> arXiv:<https://onlinelibrary.wiley.com/doi/pdf/10.1111/1467-8551.00375>
- [196] B W Tuckman. 1965. Developmental Sequence in Small Groups. *Psychol. Bull.* 63 (June 1965), 384–399.
- [197] John C Turner. 1987. *Rediscovering the Social Group: A Self-categorization Theory*. B. Blackwell.
- [198] John C Turner. 2010. Social categorization and the self-concept: A social cognitive theory of group behavior. *Rediscovering social identity*. 401 (2010), 243–272.

- [199] Marlon Twyman and Noshir Contractor. 2019. Team Assembly. In *Strategies for Team Science Success: Handbook of Evidence-Based Principles for Cross-Disciplinary Science and Practical Lessons Learned from Health Researchers*, Kara L. Hall, Amanda L. Vogel, and Robert T. Croyle (Eds.). Springer International Publishing, Cham, 217–240.
- [200] Gustavo Umbelino, Vivian Ta, Samuel Blake, Eric Truong, Amy Luo, and Steven Dow. 2019. ProtoTeams: Supporting Small Group Interactions in Co-Located Crowds. In *Conference Companion Publication of the 2019 on Computer Supported Cooperative Work and Social Computing (CSCW '19)*. Association for Computing Machinery, New York, NY, USA, 392–397.
- [201] Gerben S. Van Der Vegt and J. Stuart Bunderson. 2005. Learning and Performance in Multidisciplinary Teams: The Importance of Collective Team Identification. *Academy of Management Journal* 48, 3 (2005), 532–547.
- [202] José van Dijk. 2013. ‘You have one identity’: performing the self on Facebook and LinkedIn. *Media Cult. Soc.* 35, 2 (March 2013), 199–215.
- [203] Daan Van Knippenberg, Carsten KW De Dreu, and Astrid C Homan. 2004. Work group diversity and group performance: an integrative model and research agenda. *Journal of applied psychology* 89, 6 (2004), 1008.
- [204] Annelies E.M. van Vianen and Carsten K.W. De Dreu. 2001. Personality in teams: Its relationship to social cohesion, task cohesion, and team performance. *European Journal of Work and Organizational Psychology* 10, 2 (2001), 97–120.
- [205] Anthony Ventresque, Jackson Tan Teck Yong, and Anwitaman Datta. 2011. Impact of Expertise, Social Cohesiveness and Team Repetition for Academic Team Recommendation. In *Social Informatics*. Springer Berlin Heidelberg, 296–299.
- [206] Yao Wan, Liang Chen, Guandong Xu, Zhou Zhao, Jie Tang, and Jian Wu. 2018. SCSMiner: mining social coding sites for software developer recommendation with relevance propagation. *World Wide Web J. Biol.* 21, 6 (Nov. 2018), 1523–1543.
- [207] Jian Wang and Jia Zhang. 2015. A win-win team formation problem based on the negotiation. *Eng. Appl. Artif. Intell.* 44 (Sept. 2015), 137–152.
- [208] W Wang, Z He, P Shi, W Wu, Y Jiang, B An, Z Hao, and B Chen. 2019. Strategic Social Team Crowdsourcing: Forming a Team of Truthful Workers for Crowdsourcing in Social Networks. *IEEE Trans. Mob. Comput.* 18, 6 (June 2019), 1419–1432.
- [209] Wanyuan Wang, Jiuchuan Jiang, Bo An, Yichuan Jiang, and Bing Chen. 2017. Toward Efficient Team Formation for Crowdsourcing in Noncooperative Social Networks. *IEEE Trans Cybern* 47, 12 (Dec. 2017), 4208–4222.
- [210] X Wang, Z Zhao, and W Ng. 2016. USTF: A Unified System of Team Formation. *IEEE Transactions on Big Data* 2, 1 (March 2016), 70–84.
- [211] Warren E Watson, Larry K Michaelsen, and Walt Sharp. 1991. Member competence, group interaction, and group decision making: A longitudinal study. *Journal of applied psychology* 76, 6 (1991), 803.
- [212] Amy Wax, Leslie A DeChurch, and Noshir S Contractor. 2017. Self-Organizing Into Winning Teams: Understanding the Mechanisms That Drive Successful Collaborations. *Small Group Research* 48, 6 (Dec. 2017), 665–718.
- [213] Miaomiao Wen, Keith Maki, Steven Dow, James D Herbsleb, and Carolyn Rose. 2017. Supporting Virtual Team Formation through Community-Wide Deliberation. *Proc. ACM Hum.-Comput. Interact.* 1, CSCW (Dec. 2017), 1–19.
- [214] Hyeonon Wi, Seungjin Oh, Jungtae Mun, and Mooyoung Jung. 2009. A team formation model based on knowledge and collaboration. *Expert Syst. Appl.* 36, 5 (July 2009), 9121–9134.
- [215] Anita Williams Woolley, Christopher F. Chabris, Alex Pentland, Nada Hashmi, and Thomas W. Malone. 2010. Evidence for a Collective Intelligence Factor in the Performance of Human Groups. *Science* 330, 6004 (2010), 686–688.
- [216] Volker Wulf, Markus Rohde, Volkmar Pipek, and Gunnar Stevens. 2011. Engaging with Practices: Design Case Studies as a Research Framework in CSCW. In *Proceedings of the ACM 2011 Conference on Computer Supported Cooperative Work (CSCW '11)*. Association for Computing Machinery, New York, NY, USA, 505–512.
- [217] Ziang Xiao, Michelle X Zhou, and Wat-Tat Fu. 2019. Who Should Be My Teammates: Using a Conversational Agent to Understand Individuals and Help Teaming. In *Proceedings of the 24th International Conference on Intelligent User Interfaces (IUI '19)*. ACM, New York, NY, USA, 437–447.
- [218] A Yadav, A S Sairam, and A Kumar. 2017. Concurrent Team Formation for Multiple Tasks in Crowdsourcing Platform. In *GLOBECOM 2017 - 2017 IEEE Global Communications Conference*. 1–7.
- [219] Yan Yang and Haiyue Hu. 2013. Team formation with time limit in social networks. In *Proceedings 2013 International Conference on Mechatronic Sciences, Electric Engineering and Computer (MEC)*. 1590–1594.
- [220] J Yang, M Li, B Wu, and C Xu. 2016. Forming a research team of experts in expert-skill co-occurrence network of research news. In *2016 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM)*. 1143–1150.
- [221] X Yang, P Wang, and W Fang. 2018. Team Formation with Relationship Strength Based on Meta Path in Heterogeneous Network. In *2018 IEEE 9th International Conference on Software Engineering and Service Science (ICSESS)*. 797–801.
- [222] Virginia Yannibelli and Analía Amandi. 2012. A Memetic Algorithm for Collaborative Learning Team Formation in the Context of Software Engineering Courses. In *Advances in New Technologies, Interactive Interfaces and Communicability*. Springer Berlin Heidelberg, 92–103.

- [223] Luting Ye, Hailong Sun, Xu Wang, and Jiaruijie Wang. 2018. Personalized Teammate Recommendation for Crowd-sourced Software Developers. In *Proceedings of the 33rd ACM/IEEE International Conference on Automated Software Engineering (ASE 2018)*. Association for Computing Machinery, New York, NY, USA, 808–813.
- [224] C Yin and N Uosaki. 2017. Building a Group Formation System by Using Educational Log Data. In *2017 IEEE 17th International Conference on Advanced Learning Technologies (ICALT)*. 320–321.
- [225] Yitai Xu, Ying Wang, Xuedong Gao, and Lin Wei. 2010. Collaborative design team formation method based on three-phase comprehensive evaluation. In *The 2nd International Conference on Information Science and Engineering*. 1907–1910.
- [226] Bowen Yu, Yuqing Ren, Loren Terveen, and Haiyi Zhu. 2017. Predicting Member Productivity and Withdrawal from Pre-Joining Attachments in Online Production Groups. In *Proceedings of the 2017 ACM Conference on Computer Supported Cooperative Work and Social Computing (CSCW '17)*. Association for Computing Machinery, New York, NY, USA, 1775–1784.
- [227] Y Yu, W Chen, and J Yang. 2017. Team formation in business process context. In *2017 IEEE 21st International Conference on Computer Supported Cooperative Work in Design (CSCWD)*. 73–78.
- [228] Stephen J Zaccaro, Andrea L Rittman, and Michelle A Marks. 2001. Team leadership. *The Leadership Quarterly* 12, 4 (2001), 451 – 483.
- [229] Jiawei Zhang, Philip S Yu, and Yuanhua Lv. 2017. Enterprise Employee Training via Project Team Formation. In *Proceedings of the Tenth ACM International Conference on Web Search and Data Mining (WSDM '17)*. Association for Computing Machinery, New York, NY, USA, 3–12.
- [230] Lingyu Zhang, Tianshu Song, Yongxin Tong, Zimu Zhou, Dan Li, Wei Ai, Lulu Zhang, Guobin Wu, Yan Liu, and Jieping Ye. 2019. Recommendation-Based Team Formation for On-Demand Taxi-Calling Platforms. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management (CIKM '19)*. Association for Computing Machinery, New York, NY, USA, 59–68.
- [231] Y Zheng, Y Liu, W Lu, and C Li. 2016. A hybrid PSO-GA method for composing heterogeneous groups in collaborative learning. In *2016 11th International Conference on Computer Science Education (ICCSE)*. 160–164.
- [232] Z Zheng and N Pinkwart. 2014. A Discrete Particle Swarm Optimization Approach to Compose Heterogeneous Learning Groups. In *2014 IEEE 14th International Conference on Advanced Learning Technologies*. 49–51.
- [233] Sharon Zhou, Melissa Valentine, and Michael S. Bernstein. 2018. In Search of the Dream Team: Temporally Constrained Multi-Armed Bandits for Identifying Effective Team Structures. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems (CHI '18)*. Association for Computing Machinery, New York, NY, USA, 1–13. <https://doi.org/10.1145/3173574.3173682>
- [234] M Zihayat, M Kargar, and A An. 2014. Two-Phase Pareto Set Discovery for Team Formation in Social Networks. In *2014 IEEE/WIC/ACM International Joint Conferences on Web Intelligence (WI) and Intelligent Agent Technologies (IAT)*, Vol. 2. 304–311.

Received January 2020; revised June 2020; accepted July 2020