

Balancing Presence and Safety using Reaction Time in Mixed Reality

Yasra Chandio Victoria Interrante Fatima M. Anwar
 University of Massachusetts Amherst University of Minnesota Twin Cities University of Massachusetts Amherst

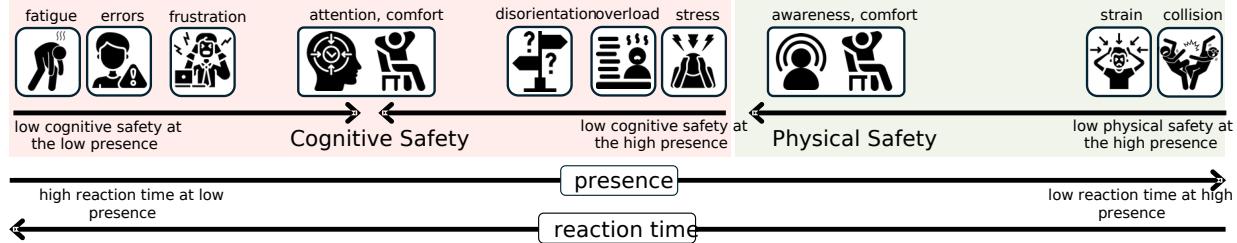


Figure 1: The interplay between presence, safety, and cognitive safety. Physical safety degrades as the presence increases due to the user's lack of physical world awareness and can lead to collisions and strain on the human body. Cognitive safety can degrade at high presence (cause stress, overload, and disorientation) and low presence (cause fatigue, errors, and frustration). A recent, quantitative, and real-time measure of presence, *reaction time*, can help balance presence and safety.

Abstract

Mixed Reality (MR) offers immersive experiences across various fields. Presence, the sensation of "being there," is crucial for immersion. While high presence enhances user engagement, it also raises cognitive and physical safety concerns. This paper explores these dual safety concerns associated with high presence in MR environments. Recent work has shown that reaction time is an effective measure of presence, providing real-time, objective insights into cognitive load and engagement levels, with faster reaction times indicating higher presence. We propose using reaction time as a real-time metric to monitor and manage cognitive and physical safety issues in MR environments. We address the three key research questions: (1) the impact of presence on safety, (2) the effectiveness of reaction time as a safety measure, and (3) the challenges of maintaining safety without compromising experience.

Index Terms: Mixed Reality, Presence, Safety, Reaction Time

1 Introduction

Mixed Reality (MR) technology merges the physical and digital worlds, allowing users to interact with real and virtual elements simultaneously, creating immersive experiences [26, 22]. This blending offers opportunities for applications in various fields, such as education [1], training [36], healthcare [45, 7, 21], entertainment [43, 14], and beyond [50, 16, 23]. However, to achieve immersion, MR applications hinge on a critical component: the *sense of presence* [33, 11], the psychological sensation of "being there" in a virtual environment (VE) [46, 35, 18]. While high presence can enhance user engagement, it also increases safety concerns that must be addressed to ensure user well-being.

Traditional MR safety approaches primarily focus on user privacy [20, 30, 10, 13] and system security [3, 4, 8, 44, 24, 49], addressing issues like data protection, unauthorized access, content and user perception manipulation and so on [29], some highlighting privacy breach from performance data that may inadvertently expose users to risks related to surveillance or identity theft. These

aspects, while crucial, do not encompass the broader spectrum of safety concerns in immersive MR environments. Cognitive and physical safety are two critical yet often overlooked areas that must be addressed to ensure a holistic approach to user safety. Cognitive safety involves managing mental load to prevent fatigue and decreased performance. Physical safety ensures users are aware of their surroundings to prevent accidents and discomfort.

Prior work has observed that high presence typically correlates with optimal cognitive engagement, whereas slower reaction times can indicate cognitive strain or distraction [19, 42]. Additionally, high presence, while enhancing immersion and engagement, can also reduce awareness of the physical environment, increasing the risk of accidents like collisions with objects. Given this correlation, a user's level of presence can be used as an indicator of the cognitive and physical safety of MR experiences. However, traditional methods of measuring presence use subjective posthoc questionnaires, which are difficult to conduct in the real world. In our earlier work, we explored objective and real-time measures of presence. Our work demonstrated that a user's reaction time to stimuli could be used as a measure of presence [5, 6]; high presence correlates with low reaction time and vice versa. Given this new measure, we can measure presence in real-world applications in real-time. Monitoring presence through reaction time can help in cognitive safety by providing insights into the user's cognitive load and engagement levels. This allows the detection of potential cognitive overload to prevent mental fatigue and ensure effective task performance. Similarly, monitoring a reaction time can indicate a user's level of physical world awareness and allow an application to take precautionary measures to regain that awareness.

By examining the interplay between presence or reaction time and safety issues, we aim to understand the trade-offs between maintaining a high presence and ensuring user safety. To this end, we ask the following research questions:

1. How does presence impact a user's cognitive and physical safety in MR environments?
2. How can reaction time be used as a metric to measure and manage cognitive and physical safety in MR environments?
3. What are the potential challenges in balancing high presence and user safety when using reaction time as a presence measure?

2 Impact of Presence on Cognitive and Physical Safety

This section provides an overview of how different elements of MR environments interact with cognitive and physical safety concerns,

*e-mail: ychandio@umass.edu

[†]e-mail: interran@umn.edu

[‡]e-mail: fanwar@umass.edu

highlighting the trade-offs between maintaining a high presence and ensuring user safety, as illustrated in Figure 1. To investigate the impact of presence on cognitive and physical safety, we categorized various MR elements based on common presence subscales derived from presence studies [37, 34, 48, 38, 39], which we outline in Table 1 (details in §A). We describe the main elements below:

Immersive quality and spatial cues (place illusion [37]) can lead to cognitive disorientation and reduced awareness of physical surroundings, resulting in accidents such as collisions. For example, users deeply immersed in a virtual game might not notice real-world objects, leading to potential injuries [41]. When it comes to realism, high sensory realism can cause stress and disorientation, especially when users cannot differentiate between virtual and real elements. This heightened presence also reduces awareness of the physical environment. Lowering presence can alleviate stress and disorientation, but it might also decrease user engagement, focus, and overall immersion, which are critical for MR experiences.

Plausibility illusion [37] ensures the coherence of the virtual experience but can lead to emotional stress due to highly realistic scenarios [17], reducing physical awareness and increasing the risk of physical accidents. For instance, a VR simulation of a natural disaster for training purposes can cause significant anxiety and stress among users [31, 17]. While high presence is essential for this, reducing it could help mitigate emotional stress.

Scene and background elements can cause distraction, cognitive overload, and reduced performance due to overwhelming stimuli; lowering these details can improve focus and interaction quality, although it might negatively impact engagement and realism. A user interface can also cause frustration, errors, and physical strain if the controls or interface are not intuitive. Reducing presence can mitigate these issues but may impact usability and navigation. Interaction responsiveness also requires high presence to avoid frustration and fatigue [32], but if it causes strain, lowering presence may enhance comfort. High involvement in Content can lead to cognitive overload and distraction; reducing presence can alleviate these issues, though it might lessen the immersive experience.

Prolonged immersion/exposure can lead to physical discomfort, fatigue, eye strain, headaches, and musculoskeletal issues [27], with poor ergonomics. Users who spend extended periods wearing VR headsets often report these physical symptoms due to the strain on their bodies [40]. Both cognitive and physical fatigue are significant concerns, as extended sessions in immersive environments can exhaust users mentally and physically, diminishing their overall well-being and performance [19, 15]. In this case, lowering the presence can improve user comfort but might reduce the sense of immersion.

3 Managing Safety Using Reaction Time as Metric

Recent work has identified reaction time, the time it takes for a user to respond to a stimulus, as a metric for measuring presence [5, 6]. This section discusses how reaction time can also measure safety and manage cognitive and physical safety in MR environments.

Measuring cognitive safety. Reaction time provides insights into cognitive load and engagement levels [41]. Faster reaction times indicate high engagement and optimal cognitive load, while slower times suggest cognitive strain. Continuous monitoring allows MR systems to detect overload and adjust tasks. For example, if a user's reaction time slows, the system might reduce the complexity of tasks or provide more frequent breaks to prevent mental fatigue.

Preventing cognitive overload. High cognitive load can lead to decreased performance and mental fatigue. By setting baseline reaction times for users, MR systems can identify deviations that indicate cognitive overload. When a user's reaction time exceeds a certain threshold, the system can trigger interventions such as pausing the activity, simplifying the task, or offering guidance to help the user regain focus and manage their cognitive load.

Measuring physical unawareness. High presence in MR environments can reduce a user's awareness of their physical surroundings, increasing the risk of accidents. Monitoring reaction time can help gauge the level of presence and alert the system when the user is becoming too engrossed. If reaction times slow down significantly, indicating overimmersion [9], the system can introduce subtle cues to remind the user of their physical environment. These cues can include visual reminders, auditory alerts, or haptic feedback to enhance physical awareness without breaking presence.

Preventing physical discomfort. Extended use of MR can lead to physical discomforts, such as eye strain, headaches, and musculoskeletal issues [15]. Reaction time can serve as an early indicator of physical strain. For instance, prolonged slower reaction times might suggest the onset of fatigue or discomfort. The MR system can then prompt the user to take breaks, adjust their posture, or perform relaxation exercises. This proactive approach can help mitigate physical strain and enhance overall user comfort.

4 Presence and Safety Trade-off

Managing safety in MR environments using reaction time as a metric presents several challenges. While this approach offers a real-time, objective way to gauge user experience and cognitive load, balancing high presence and safety remains complex.

Real-Time adaptation. One major challenge is ensuring the MR system can adapt in real-time based on reaction time data. This requires advanced algorithms and responsive hardware capable of swiftly processing reaction time measurements and implementing necessary adjustments without interrupting the user experience. Ensuring the system's robustness and reliability is crucial to avoid any lag or inaccuracy that could not only compromise safety and immersion but can also induce cybersickness [28].

User intervariability. Reaction time varies significantly among individuals due to factors such as age, experience, and cognitive abilities [47]. A one-size-fits-all approach may not be effective. MR systems must calibrate and personalize reaction time thresholds for each user to ensure accuracy. Personalizing these thresholds adds complexity to system design and requires extensive user data to implement effectively.

Safety vs. experience trade-off. The ultimate challenge is balancing the need for high presence to maintain experience and immersion with the need for safety. High presence can enhance the immersive experience but also increases risks of cognitive overload and physical unawareness. Reaction time as a metric helps navigate this balance by providing real-time feedback, but it requires a nuanced approach to task interpretation and response. For example, introducing subtle cues to regain physical awareness must be done without breaking presence [2].

Other safety measures and practical limitations. Reaction time should not be the sole metric, integrating it with other safety measures, such as user feedback and physiological monitoring [25, 12], can provide a more comprehensive safety framework. Combining multiple metrics can help address the limitations of each individual measure, ensuring the accuracy and reliability of safety measurements in varied MR scenarios that require careful calibration and validation. Finally, the measurement must be seamlessly integrated into the MR system without causing disruptions or incurring costs.

5 Conclusion

This paper highlights the importance of addressing cognitive and physical safety alongside traditional security and privacy concerns, ensuring a comprehensive and holistic approach to user safety in MR environments. In summary, while reaction time presents a viable solution for managing safety in MR environments, its full potential can only be realized through extensive research and development. By continuing to investigate and refine these methods, we can create safer and more immersive MR experiences that do not compromise user well-being.

Acknowledgments

We thank the anonymous reviewers at SafeAR@ISMAR 2024. This research is supported by National Science Foundation grant 2237485.

References

- [1] J. Birt, Z. Stromberga, M. Cowling, and C. Moro. Mobile mixed reality for experiential learning and simulation in medical and health sciences education. *Information*, 9(2):31, 2018. [1](#)
- [2] L. Brübach, F. Westermeier, C. Wienrich, and M. E. Latoschik. Breaking plausibility without breaking presence - evidence for the multi-layer nature of plausibility. *IEEE Transactions on Visualization and Computer Graphics*, 28, 2022. [2](#)
- [3] P. Casey, I. Baggili, and A. Yarramreddy. Immersive Virtual Reality Attacks and the Human Joystick. *IEEE Transactions on Dependable and Secure Computing (TDSC)*, 18(2):550–562, 2021. doi: 10.1109/TDSC.2019.2907942 [1](#)
- [4] Y. Chandio, N. Bashir, and F. M. Anwar. Stealthy and practical multimodal attacks on mixed reality tracking. In *2024 IEEE International Conference on Artificial Intelligence and eXtended and Virtual Reality (AIXVR)*, pp. 11–20, 2024. doi: 10.1109/AIXVR59861.2024.00010 [1](#)
- [5] Y. Chandio, N. Bashir, V. Interrante, and F. M. Anwar. Investigating the correlation between presence and reaction time in mixed reality. *IEEE Transactions on Visualization and Computer Graphics*, pp. 1–13, 2023. doi: 10.1109/TVCG.2023.3319563 [1, 2](#)
- [6] Y. Chandio, V. Interrante, and F. M. Anwar. Human factors at play: Understanding the impact of conditioning on presence and reaction time in mixed reality. *IEEE Transactions on Visualization and Computer Graphics*, 30(5):2400–2410, 2024. [1, 2](#)
- [7] L. Chen, T. W. Day, W. Tang, and N. W. John. Recent developments and future challenges in medical mixed reality. In *2017 IEEE International Symposium on Mixed and Augmented Reality (ISMAR)*, pp. 123–135, 2017. [1](#)
- [8] K. Cheng, J. F. Tian, T. Kohno, and F. Roesner. Exploring user reactions and mental models towards perceptual manipulation attacks in mixed reality. In *32nd USENIX Security Symposium (USENIX Security 23)*, pp. 911–928, 2023. [1](#)
- [9] J. J. Cummings and J. N. Bailenson. How immersive is enough? a meta-analysis of the effect of immersive technology on user presence. *Media psychology*, 19(2):272–309, 2016. [2](#)
- [10] J. A. De Guzman, K. Thilakarathna, and A. Seneviratne. Security and privacy approaches in mixed reality: A literature survey. *ACM Computing Surveys (CSUR)*, 52(6):1–37, 2019. [1](#)
- [11] I. Deary, D. Liewald, and J. Nissan. A free, easy-to-use, computer-based simple and four-choice reaction time programme: the deary-liewald reaction time task. *Behaviour Research*, 43, 2011. [1](#)
- [12] A. Dey, J. Phoon, S. Saha, C. Dobbins, and M. Billinghurst. A neurophysiological approach for measuring presence in immersive virtual environments. In *2020 IEEE International Symposium on Mixed and Augmented Reality (ISMAR)*, pp. 474–485, 2020. doi: 10.1109/ISMAR50242.2020.00072 [2](#)
- [13] A. Gallardo, C. Choy, J. Juneja, E. Bozkir, C. Cobb, L. Bauer, and L. Cranor. Speculative privacy concerns about ar glasses data collection. *Proceedings on Privacy Enhancing Technologies*, 2023. [1](#)
- [14] C. S. Green and D. Bavelier. Action video game modifies visual selective attention. *Nature*, 423(6939):534–537, 2003. [1](#)
- [15] J. Guo, D. Weng, H. Fang, Z. Zhang, J. Ping, Y. Liu, and Y. Wang. Exploring the differences of visual discomfort caused by long-term immersion between virtual environments and physical environments. In *2020 IEEE Conference on virtual reality and 3D user interfaces (VR)*, pp. 443–452. IEEE, 2020. [2](#)
- [16] Y. Jang and E. Park. An adoption model for virtual reality games: The roles of presence and enjoyment. *Telematics and Informatics*, 42:101239, 2019. [1](#)
- [17] C. Jicol, C. H. Wan, B. Doling, C. H. Illingworth, J. Yoon, C. Headay, C. Lutteroth, M. J. Proulx, K. Petrini, and E. O'Neill. Effects of emotion and agency on presence in virtual reality. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*, pp. 1–13, 2021. [2](#)
- [18] R. Kalawsky. The validity of presence as a reliable human performance metric in immersive environments. *3rd International Workshop on Presence*, 2000. [1](#)
- [19] E. Kim and G. Shin. User discomfort while using a virtual reality headset as a personal viewing system for text-intensive office tasks. *Ergonomics*, 64, 2021. [1, 2](#)
- [20] K. Lebeck, T. Kohno, and F. Roesner. How to Safely Augment Reality: Challenges and Directions. In *ACM International Workshop on Mobile Computing Systems and Applications (HotMobile)*, 2016. [1](#)
- [21] C. A. Linte, K. P. Davenport, K. Cleary, C. Peters, K. G. Vosburgh, N. Navab, P. E. Edwards, P. Jannin, T. M. Peters, D. R. Holmes, and R. A. Robb. On Mixed Reality Environments for Minimally Invasive Therapy Guidance: Systems Architecture, Successes and Challenges In Their Implementation From Laboratory To Clinic. *Computerized Medical Imaging and Graphics*, 37(2):83–97, Mar. 2013. doi: 10.1016/j.compmedimag.2012.12.002 [1](#)
- [22] B. C. Lok. Toward the merging of real and virtual spaces. *Communications of the ACM*, 47(8):48–53, 2004. [1](#)
- [23] F. Lu, H. Zhou, L. Guo, J. Chen, and L. Pei. An ARCore-Based Augmented Reality Campus Navigation System. *Applied Sciences*, 11, 2021. [1](#)
- [24] F. Mathis, J. H. Williamson, K. Vaniea, and M. Khamis. Fast and secure authentication in virtual reality using coordinated 3d manipulation and pointing. *ACM Transactions on Computer-Human Interaction (ToCHI)*, 28(1):1–44, 2021. [1](#)
- [25] M. Meehan, B. Insko, M. Whitton, and F. P. Brooks. Physiological measures of presence in stressful virtual environments. *ACM Transactions on Graphics*, 21, 2002. [2](#)
- [26] P. Milgram, H. Takemura, A. Utsumi, and F. Kishino. Augmented Reality: A Class of displays on the Reality-Virtuality Continuum. In *Telemanipulator and Telepresence Technologies*. SPIE, 1995. [1](#)
- [27] J. D. Moss and E. R. Muth. Characteristics of head-mounted displays and their effects on simulator sickness. *Human Factors*, 53, 2011. [2](#)
- [28] K. Nesbitt and E. Nalivaiko. *Cybersickness*. Springer International Publishing, 2018. [2](#)
- [29] B. Odeleye, G. Loukas, R. Heartfield, G. Sakellari, E. Panaousis, and F. Spyridonis. Virtually secure: A taxonomic assessment of cybersecurity challenges in virtual reality environments. *Computers & Security*, 124:102951, 2023. doi: 10.1016/j.cose.2022.102951 [1](#)
- [30] J. O'Hagan, P. Saeghe, J. Gugenheimer, D. Medeiros, K. Marky, M. Khamis, and M. McGill. Privacy-enhancing technology and everyday augmented reality: Understanding bystanders' varying needs for awareness and consent. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 6(4):1–35, 2023. [1](#)
- [31] D. Paes, J. Irizarry, and D. Pujoni. An evidence of cognitive benefits from immersive design review: Comparing three-dimensional perception and presence between immersive and non-immersive virtual environments. *Automation in Construction*, 130:103849, 2021. [2](#)
- [32] K. Rogers, J. Funke, J. Frommel, S. Stamm, and M. Weber. Exploring interaction fidelity in virtual reality: Object manipulation and whole-body movements. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*, CHI '19, p. 1–14. Association for Computing Machinery, New York, NY, USA, 2019. doi: 10.1145/3290605.3300644 [2](#)
- [33] M. Sanchez-Vives and M. Slater. From presence to consciousness through virtual reality. *Nature Reviews Neuroscience*, 6, 2005. [1](#)
- [34] T. Schubert, F. Friedmann, and H. Regenbrecht. The experience of presence: Factor analytic insights. *Presence: Teleoperators & Virtual Environments*, 10, 2001. [2](#)
- [35] M. J. Schuemie, P. Van Der Straaten, M. Krijn, and C. A. Van Der Mast. Research on presence in virtual reality: A survey. *CyberPsychology & Behavior*, 4, 2001. [1](#)
- [36] B. Schwald and B. De Laval. An Augmented Reality System for Training and Assistance to Maintenance in the Industrial Context. In *International Conference in Central Europe on Computer Graphics and Visualization (WSCG)*. UNION Agency-Science Press, 2003. [1](#)
- [37] M. Slater. Place illusion and plausibility can lead to realistic behaviour in immersive virtual environments. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 364, 2009. [2](#)
- [38] M. Slater and A. Steed. A virtual presence counter. *Presence*, 9, 2000.

2

[39] M. Slater, M. Usoh, and A. Steed. Depth of presence in virtual environments. *Presence: Teleoperators & Virtual Environments*, 3, 1994.

2

[40] A. D. Souchet, D. Lourdeaux, A. Pagani, and L. Rebenitsch. A narrative review of immersive virtual reality's ergonomics and risks at the workplace: cybersickness, visual fatigue, muscular fatigue, acute stress, and mental overload. *Virtual Reality*, 27(1):19–50, 2023.

2

[41] A. Steed, Y. Pan, F. Zisch, and W. Steptoe. The impact of a self-avatar on cognitive load in immersive virtual reality. In *IEEE Virtual Reality*, 2016.

2

[42] J. Sweller. Cognitive load during problem solving: Effects on learning. *Cognitive science*, 12(2):257–285, 1988.

1

[43] M. Trunfio, T. Jung, and S. Campana. Mixed reality experiences in museums: Exploring the impact of functional elements of the devices on visitors' immersive experiences and post-experience behaviours. In *Information & Management*, vol. 59. Elsevier, 2022.

1

[44] W.-J. Tseng, E. Bonnail, M. McGill, M. Khamis, E. Lecolinet, S. Huron, and J. Gugenheimer. The dark side of perceptual manipulations in virtual reality. In *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems, CHI '22*. Association for Computing Machinery, New York, NY, USA, 2022. doi: 10.1145/3491102.3517728

1

[45] P. Vávra, J. Roman, P. Zorić, P. Ihnát, M. Němec, K. Jayant, N. Habib, and A. El-Gendi. Recent development of augmented reality in surgery: A review. *Journal of Healthcare Engineering*, 2017:1–9, 08 2017. doi: 10.1155/2017/4574172

1

[46] S. Weech, S. Kenny, and M. Barnett-Cowan. Presence and cybersickness in virtual reality are negatively related: A review. *Frontiers in Psychology*, 10, 2019.

1

[47] M. Wiesing, G. Fink, and R. Weidner. Accuracy and precision of stimulus timing and reaction times with unreal engine and steamvr. *PLoS ONE*, 15, 2020.

2

[48] B. G. Witmer and M. J. Singer. Measuring presence in virtual environments: A presence questionnaire. *Presence: Teleoperators & Virtual Environments*, 7, 1998.

2

[49] Y. Zhang, C. Slocum, J. Chen, and N. Abu-Ghazaleh. It's all in your head (set): Side-channel attacks on {AR/VR} systems. In *32nd USENIX Security Symposium (USENIX Security 23)*, pp. 3979–3996, 2023.

1

[50] J. Zhao, E. Pikas, O. Seppänen, and A. Peltokorpi. Using real-time indoor resource positioning to track the progress of tasks in construction sites. In *Frontiers in Built Environment*, vol. 7, 2021.

1

A Appendix

This section discusses various elements of MR environments and their associated presence subscales individually. Understanding these components is crucial for creating immersive and engaging experiences while ensuring cognitive and physical safety. Each MR element and presence subscale shapes the user's experience, influencing engagement, realism, and comfort. We also explore the safety concerns linked to these elements in Table 1.

A.1 MR Elements

Immersive quality and spatial cues. refer to feeling physically present in a non-physical world. It encompasses elements that enhance the user's perception of the virtual space as a real place. It is critical for achieving a sense of immersion and making the virtual environment feel convincing and engaging.

Sensory realism. The extent to which the virtual environment replicates real-world sensory experiences, including visual, auditory, and haptic feedback. It improves user engagement by providing realistic and immersive sensory experiences.

Coherence. The degree to which events and elements in the virtual environment are perceived as real and logically consistent, ensuring the virtual experience is believable and emotionally engaging.

Scene setting. Involves the virtual environment's background elements and overall context, including lighting, textures, and ambient

sounds. It sets the stage for interactions and enhances the immersive quality of the environment.

Task Complexity. Refers to the difficulty and intricacy of tasks that users perform within the MR environment. It affects cognitive load and user engagement, with more complex tasks requiring greater cognitive resources.

Background elements. These are secondary elements within the environment that can affect the user's focus and attention, influencing cognitive load and interaction quality, where high levels of distraction can reduce performance.

Interactive elements. components that users can manipulate or interact with, such as buttons, levers, and tools. They are essential for user engagement and the overall interactivity of the MR environment.

Interaction responsiveness. The accuracy and speed with which the system responds to user actions. It Ensures seamless and intuitive interactions, reducing frustration and enhancing user satisfaction.

Content. The narrative and activities within the MR environment that engage the user. High involvement in content can lead to deeper engagement and immersion.

User interface and navigation. The design and layout of controls and navigation tools that allow users to interact with the MR environment, ensuring ease of use and helping prevent errors and frustration.

Ergonomics. The design of the MR system to ensure user comfort and reduce physical strain. They are important for prolonged use, minimizing physical discomfort and fatigue.

A.2 Presence Subscales

Place illusion. The sensation of "being there" in the virtual environment is central to creating a convincing immersive experience.

Perceived realism. The degree to which the virtual environment appears real to the user. Use: Enhances user engagement by providing realistic and believable sensory inputs.

Plausibility illusion. The extent to which events in the virtual environment are perceived as plausible and logical. It affects the coherence and emotional impact of the virtual experience.

Environmental context. The background and contextual elements that make up the virtual setting. It supports immersion by providing a consistent and engaging backdrop for user interactions.

Task complexity. The perceived difficulty and cognitive demands of tasks within the MR environment. Influences user engagement and cognitive load management.

Distraction. The presence of elements that can divert the user's attention from primary tasks. It affects cognitive load and the quality of user interactions.

Control factors. The intuitiveness and responsiveness of the control mechanisms within the MR environment are crucial for usability and effective navigation.

Interaction fidelity. The accuracy and responsiveness of the system's interactions. It enhances user satisfaction and reduces frustration by providing precise feedback on user actions.

Involvement. The level of user engagement and absorption in the content of the MR environment. High involvement leads to deeper cognitive and emotional engagement.

Usability. The ease with which users can interact with and navigate the MR environment is useful for a smooth and frustration-free user experience.

User comfort. The physical ease and comfort experienced by users during interaction with the MR environment. It helps reduce physical strain and discomfort, which is important for extended use.

MR Element	Presence Subscales	Safety concerns		Presence requirement	Worse with low presence
		Cognitive	Physical		
Immersive quality and spatial cues	Place Illusion	disorientation (✓)	reduced awareness, collisions (✓)	High	immersion, engagement
Sensory realism	Perceived Realism	stress, disorientation (✓)	reduced awareness (✓)	High	engagement, focus
Coherence	Plausibility Illusion	emotional stress (✓)	reduced awareness (✓)	High	realism, immersion
Scene setting	Environmental context	distraction, reduced performance (✓)		High	engagement, realism
Task	Task complexity	overload		High	control, engagement
Background elements	distraction	overload, reduced focus and attention		High	interaction quality
Interactive elements	Control factors	frustration		High	usability, navigation
Interaction responsiveness	Interaction fidelity	frustration, errors, fatigue	strain	High	comfort
Content	Involvement	overload, distraction, reduced focus and attention (✓)	reduced awareness (✓)	Low	None
User interface and navigation	Usability	frustration, errors (✓)	strain (✓)	Low	None
Ergonomics	User comfort	reduced performance, fatigue (✓)	discomfort, strain (✓)	Low	None

Table 1: Overview of MR elements, their corresponding presence subscales, associated safety concerns, presence requirements, and the impact of low presence on user experience. (✓) indicates that the factor can improve with a lower presence. (✗) shows that this factor can get better with low presence.

A.3 Safety Concerns

A.3.1 Cognitive

Disorientation. Occurs when users have difficulty orienting themselves within the MR environment, leading to confusion and impaired navigation.

Stress. Arises from highly realistic or intense virtual scenarios can cause emotional strain and mental pressure.

Overload. It happens when the cognitive demands of the MR environment exceed the user's capacity, leading to mental fatigue and decreased performance.

Frustration. Results from poorly designed interactions or controls lead to a negative user experience characterized by annoyance and dissatisfaction.

Errors. Occur when users make mistakes due to cognitive over-

load or poor interaction design, resulting in incorrect actions or decisions.

Distraction. It involves secondary environmental elements that divert attention from primary tasks, reducing focus and performance.

A.3.2 Physical

Reduced awareness. Manifests as a decreased awareness of the physical surroundings, increasing the risk of accidents.

Collisions. Results from users moving into real-world objects due to a lack of awareness of their physical environment.

Physical discomfort and strain. Refers to the physical unease and exertion experienced by users due to prolonged interaction with MR devices, including sensations of fatigue, muscle strain, and general physical discomfort.